BETON express

Dimensioning Concrete structures
according to Eurocode 2

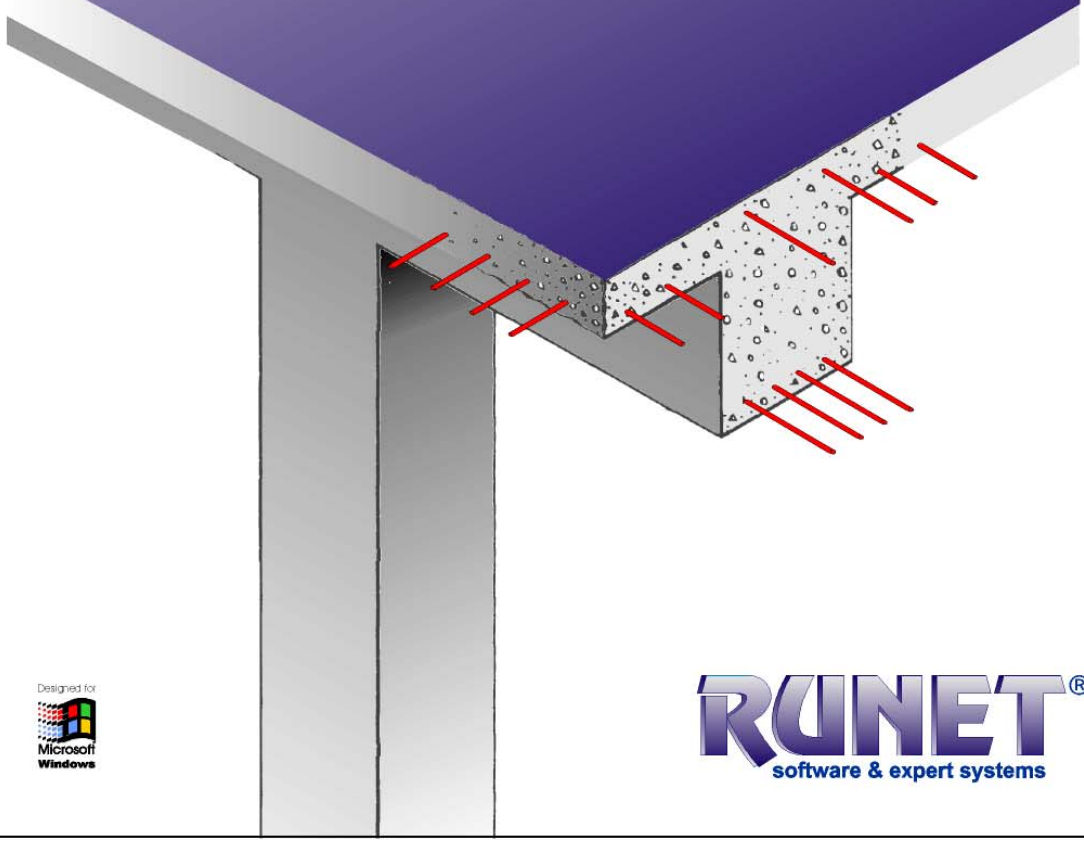

Designed for Microsoft Windows

RUNET®
software & expert systems

© 2000-2008 RUNET Norway as

USER'S Manual

License and copyright

BETONexpress, *Version 02/08,* User's guide. Copyright © RUNET®software.

The software BETONexpress*,* described in this users manual, is furnished under a license agreement. The software may be used only in accordance with the terms of the license agreement. Information in this document is subject to change without notice.

License and copyright

If you do not agree with the terms of the following Disclaimer and License Agreement, return the program disks before you install and activate it, to RUNET Norway AS, within 30 days of purchase for a full refund of software cost and sales tax.

Disclaimer

This software should be used only from experienced and licensed professional engineers. The software must be considered as a helping tool for the designer engineer, and can never replace the knowledge, the experience and the judgment of a professional engineer. The user of this software must understand that no matter how advanced and well checked this software is, he should carefully check the results and take responsibility of their use.

Copyright

This software is owned by RUNET Norway AS, and it is protected by EC (European Community) Copyright Laws and International Treaty Provisions. This software and the accompanying materials, must be treated like any other copyrighted material (e.g. book). It is allowed although to make one copy of the Software for backup or archive purposes. You may not copy and distribute the accompanying materials. It is strictly prohibited by law unauthorized reproduction or resale of this software product and the accompanying materials.

Software License

This is a legal agreement between the legal user of this software and RUNET Norway AS. By installing this software you agree to be bound by the terms of this agreement. If you do not agree to the terms of this agreement then do not install this software and return within 30 days after purchase, for a fully refund of your payment.

Scope of License

Each licensed copy of **BETONexpress** must be used either on a single computer, or installed on a single workstation used non-simultaneously by multiple people, but not both. This is not a concurrent use license.

You may not rent or lease this software. You may not modify, adapt, translate, reverse engineer, decompose, or disassemble the software. Any violation of this agreement terminates your right to use this software.

Liability Limitations

BETONexpress, in no event shall be liable for any damages whatsoever (including without limitations, damages for loss of business profits, business interruption, or any other loss) arising of the use of this software. RUNET Norway AS makes no warranties, either expressed or implied, as to the quality or performance of this software, that the results and calculations of this software will meet your requirements, or that the operation of this software will be error free.

This software is a helping tool to aid you in the design. The results of this software must be reviewed and interpreted from experienced licensed engineers, and by no means constitute an acceptable engineering design.

BETONexpress and related documentation are provided "AS IS" and without warranties as to performance or merchantability or any other warranties whether expressed or complied. Because of the various hardware and software environment into which this software may be put, no warranty of fitness for a particular purpose is offered. Under no circumstances shall RUNET Norway AS and its personal be liable for any direct or indirect, incidental special or consequential damages resulting from the use or inability to use of this software or related documentation, even if RUNET has been advised of the possibility of such damages.

This agreement shall be governed by EC (European Community) laws. If for any reason a court or competent jurisdiction finds any provision of this agreement, or portion thereof, to be unenforceable, that provision of the agreement shall be enforced to the maximum extend permissible so as to effect the intent of the parties, and the remainder of this agreement shall continue in full force effect.

If this license is too restrictive with the laws of your country, do not use this software and return within 30 days after purchase, for a fully refund of your payment.

RUNET NORWAY as, Tennfjord 6264-N, Norway

e-mail: support@runet-software.com

Internet: http://www.runet-software.com

Table of Contents

1. General 6
2. After program installation 7
3. Basic philosophy in program use 8
4. Design objects 9
5. Calculation Window 9
6. Files 10
7. Units 10
8. Step by step, program use 11
9. Parameters 12
9.1 Concrete and steel class 12
9.2 Design rules 12
9.3 Eurocode Transition (insert screen) 13
9.4 Parameters of reinforced concrete 13
9.5 Parameters of footings 14
9.5.1 Design according to Eurocode 7 14
9.5.2 Design with allowable stresses 14
9.5.3 Reinforced concrete design 14
9.5.4 Seismic design 14
9.6 Parameters of retaining walls 15
9.6.1 Wall stability according to Eurocode 7 15
9.6.2 Wall stability with allowable stresses 15
9.6.3 Gravity retaining walls, (design according to Eurocode 6) 16
9.6.4 Gravity retaining walls (design with allowable stresses) 16
9.6.5 Reinforced concrete design 16
9.6.6 Seismic design 16
9.7 Soil properties 17
9.8 FRP Fibre Reinforced Polymer Materials 17
9.9 Reset all parameters 17
10. General input data for concrete components 18
10.1.1 Name of design object 18
10.1.2 Concrete-Steel Class 18
10.1.3 Reinforcing bar diameter 18
10.1.4 Partial safety factors for actions (Eurocode 0, Annex A1) 19
10.1.5 Partial safety factors for materials (Eurocode 2 §2.4.2.4 Table 2.1.N) 19
10.1.6 Concrete cover (Eurocode 2 §4.4.1.2) 19
11. Concrete slabs 20
11.1 Slabs section design 20
11.2 One-way multiple span slabs (up to 8 spans) 21
11.2.1 Slab thickness 22
11.2.2 Span length 22
11.2.3 Number of spans 22
11.2.4 Loads 22
11.2.5 Percent of moment redistribution 22
11.2.6 Support width 22
11.3 Two-way slabs 22
11.3.1 Support conditions 24
11.3.2 Torsional resistance 24
11.3.3 Loads 24
11.4 Ribbed slabs 24
11.5 Cantilever slabs 25
11.5.1 Slab thickness 25
11.5.2 Loads 25
11.5.3 Free span 25
11.6 Slab section, moment capacity 26
11.7 Slab section strengthened with FRP jacket (moment capacity) 26
12. Beams 27
12.1 Effective flange width 27
12.2 Beam cross section data 27
12.3 Beam cross section subjected to bending- shear and axial load 28
12.4 One span beam under composite loading 28
12.4.1 Beam span 29
12.4.2 Loads 29
12.5 Multiple span continuous beams 29
12.5.1 Beam cross-section 30
12.5.2 Span length 30

12.5.3 Number of spans 30
12.5.4 Loads 30
12.5.5 Percent of moment redistribution 30
12.5.6 Support width 31
12.6 Beam section subjected to torsion 31
12.7 Moment capacity of beam section 31
12.8 Beam section strengthened with FRP jacket (moment capacity) 32
13. Columns 32
13.1 Design of column section in double bending 33
13.2 Slender columns (second order effects) 33
13.3 Column section capacity 34
13.4 Column section strengthened with FRP jacket 35
14. Spread footings 36
14.1 Dimensions and loading 37
14.2 Soil properties 37
14.3 Spread footings, centrically loaded 38
14.4 Spread footings eccentrically loaded 38
14.5 Spread footings, eccentric (unsymmetrical) footing 38
15. Retaining walls 39
15.1 Earth pressure 40
15.2 Lateral earth pressure 40
15.3 Dimensions 40
15.4 Soil properties 41
15.4.1 Properties of soil layers for lateral earth forces 41
15.4.2 Foundation soil 41
15.5 Stability design 41
15.5.1 Stability checks using Working Stresses Design 42
15.6 Seismic loading 42
15.7 Gravity type retaining walls 43
15.7.1 Design method 43
15.7.2 Wall materials 43
15.8 Retaining walls of cantilever type 44
16. Corbels / Brackets 44
16.1 Loading 45
16.2 Bearing capacity at load point 45
16.3 Reinforcement 45
17. Deep beams 46
17.1 Design method 46
17.2 Reinforcement 46
17.3 Dimensions 47
17.4 Loading 47
18. Reinforcement schedule 48
18.1 Reinforcement schedule for plates 48
18.2 Reinforcement schedule for beams 49
19. CAD drawing of concrete elements 50
19.1 CAD Features 50
19.1.1 Dimension units 50
19.1.2 Line thickness, colour and font sizes 51
19.1.3 Add extra dimensions 51
19.2 Print - preview drawing 51
19.3 Project panel 52
19.4 Export drawing to PDF format 53
19.5 Export drawing to dxf format 53
20. Program settings 53
20.1 Greek character setup 53
20.2 Language Set Up 53
20.3 Decimal point symbol 53
20.4 Screen sizes 53
20.5 User's guide 53
21. Reports 54
21.1 Preview report 54
21.2 Printing report 54
21.3 Report to file 55
21.4 Text insert 55

21.5 Report editing 55
21.6 Printer Setup 55
21.7 Troubleshooting 55
22. Report parameters 56
22.1 Report –setup 56
22.1.1 Report Page Header 56
22.1.2 Main report 56
22.1.3 Report page footer 56
22.2 Page setup 57
22.2.1 Report cover 57
22.2.2 Report setup, Various 57
23. Program settings 58
23.1.1 Greek character support 58
23.1.2 Language Set Up 58
23.1.3 Decimal point symbol 58
23.1.4 Screen dimensions 58
23.1.5 User's guide 58
24. Engineering tools 59
24.1.1 Unit conversion Cross sections 59
24.1.2 Areas (x,y coordinates) 59
24.1.3 Area (polar coordinates) 59
24.1.4 Areas (sum of triangles) 59
25. Eurocodes 60
25.1 Eurocode 0 EN 1990:2002, Load combination 60
25.2 Eurocode 2, concrete design 60
25.2.1 Concrete (Eurocode 2 §3.1) 60
25.2.2 Reinforcing steel Eurocode 2, §3.2 61
25.2.3 Concrete cover Eurocode 2 § §4.4.1.2. 61
25.3 Eurocode 7, Geotechnical design 62
25.4 Eurocode 8, Seismic design 62
26. References 64
Annex 1 65
27. BETONexpress Command Line 65
27.1 How to import the command file 65
27.2 Example of command text file 65
27.2.1 Command Line explanations 65

1. General

BETONexpress is a software that covers the design and analysis of concrete components according to Eurocode 2. In a unified environment you design concrete elements in a simple way. The calculations of concrete components performed by BETONexpress cover all the needs of a structural design firm. It simplifies all the repetitive and time-consuming every day calculations for concrete elements.

In a graphical added environment you specify the necessary dimensions, loads and design code parameters of concrete components, and the design is immediately performed. Default values and checks for erroneous input values, facilitate the input data process. The detailed calculations can be viewed immediately.

The report shows in detail all the calculations and the design steps with references to the corresponding design code paragraphs. In case of inadequate design warnings in red colour appear in the report. A reinforcing bar schedule is also produced, and a special editor can be used to add or edit reinforcing bars. The report quality is high with sketches, graphs and formulas. The report can be exported to PDF and Word files.

The CAD modulus of the program automatically creates detailed drawings.

In one project you can create as many concrete components (design objects) as you desire. All the data are stored automatically in one file. A dedicated window helps you working with the design objects in a project. Each concrete object is well marked with a name and an icon. You can edit, copy or delete design objects in a project with a click of the mouse. You can select the objects to be included in the final project report, and the reinforcing bar schedule.

With double clicking on a design object you enter its calculation window. With right clicking on a design object you can select actions like computations, report previewing and printing exporting, or drawing.

A context-sensitive Help system, guides you through the use of the program and the Eurocode provisions. On-line user's manual and frequently asked questions (F.A.Q.) are included in the program.

You can adjust the material properties and the design code parameters according to the requirements of the National application document.

Eurocode 2 is used for the concrete design, Eurocode 7 for the geotechnical design, Eurocode 8 for the seismic design, and Eurocode 6 for gravity wall design. In addition in the design of footings and gravity retaining walls, the allowable stress method may be used.

For your design you can choose Eurocode 2, EN 1992-1-1:2004 *or* (EC2) ENV 1992 Design of concrete structures.

The **concrete components** you can design are:

Solid and ribbed slabs

- slab sections, one-way continuous slabs, two-way slabs, cantilever slabs,
- section capacity, section capacity with FRP strengthening

Beams of rectangular or T section

- beam sections in bending shear and torsion, one span in composite loading, continuous beams in uniformly distributed loading,
- section capacity, section capacity with FRP strengthening

Columns

- column sections in biaxial bending, isolated columns,
- section capacity, section capacity with FRP strengthening

Spread footings

- flat or sloped footings, centrically or eccentrically loaded, eccentric footings

Retaining walls

- gravity type backwards inclined or not, cantilever walls

Corbels-brackets

Deep beams

In addition, various **engineering tools** are included: unit conversion, section properties, area computations, reinforcing bar properties, lateral earth pressure coefficients.

From the **parameters** menu you can adjust the default dimensions, code parameters and material properties, according to the needs of your region and the Eurocode National application document of your country.

2. After program installation

The program is based on the structural Eurocodes. The application as well as the parameters of Eurocodes may differ from country to country. It is advisable to consult the National Application Documents, which define the parameters, the supporting standards and provide national guidance on the application of Eurocodes.

After the installation of the program, the user must adjust various parameters such as material constants, safety factors, default values, and minimum requirements for reinforcement.

The user can decide the appearance of the report by adjusting: user defined graphic and logo text, page margins, font selection, size of indentation etc. The report parameters must also be adjusted to meet the requirements of the program user.

From **Parameters**:

- **Design rules.** You can select the design code you want to use.(select Eurocode or native code for concrete design, Eurocode 7 or allowable stresses for foundation design, seismic design)
- **Concrete and steel class.** You select the default concrete class and reinforcing steel class.
- **Eurocode transition**, select EN or ENV version of Eurocodes to apply in the design.
- **Concrete properties**, **Reinforcing steel properties**, **Soil properties**, **Fiber Reinforced Polymer materials**. You can adjust the characteristic properties according to the requirements of your region or country. For this it is advisable to consult the National Application Document of the Eurocodes 2, 6, 7, 8 and 1.
- **Parameters of reinforced concrete**, **Parameters of footings**, **Parameters of retaining walls**. You can set the default values for the various design pars.

From **Report setup**:

You can adjust the report appearance (margins, font, cover, company logo, page caption, page footnote, indentations, graphic appearance, pagination).

From [**Setup/Decimal point]** you can select type of decimal point symbol.

You check the right appearance of Greek mathematical symbols in the report. If you do not get the right appearance of Greek characters, then from [**Setup/Greek character support**], you can select the Greek characters to appear explicitly with English characters.

According to the notation used in the Eurocodes the report contains many Greek mathematical symbols. Depending on the Window installation the Greek mathematical symbols may or may not appear right. If you have Windows XP or 2000 you may add Greek language support in your Windows. Go to [Settings/Control Panel/Regional and Language Options/Advanced].

If your Windows do not support Greek mathematical symbols, then from [Setup/Greek character support] select NO. The Greek characters will appear as alpha, beta etc., in the report.

You can change program language from **[Setup/Language Set-Up]**. By changing the language and confirm it by [apply]. You must recalculate the design objects to take the new language in the report.

From [**Help/Program user's manual]** you can read or print the program user's manual.

3. Basic philosophy in program use

With the program you create and manipulate various design objects. The design objects can be a variety of concrete parts of a structure such as: slabs, beams, columns, footings, retaining walls, corbels, deep beams. All the program activity takes place within the main window.

Within a project you may create as many design objects as you want. All the data are saved in one project file. A common report and reinforcing bar schedule is created. You can select the concrete objects that you want to include in the report and the rebar schedules. The main window displays and handles all the necessary information and actions for the design objects of the project.

You can create new design objects with the action buttons at the top of the main program window.

Each design object, with a name you specified, and a characteristic icon, is shown in a list in the [Design objects] window. From this window you can regulate their appearance and the order of appearance in the report. The right side window shows the calculations of the selected design object.

By double clicking a design object you enter its calculation window, where you specify the dimensions, the loads and the design code parameters. When the object is created the parameters take the default values. All the required data are well marked with a sketch, and the appropriate dimensions. The program constantly checks for wrong or inappropriately entered values.

With right clicking a design object you can select from the popup menu actions like computation, report previewing, printing, exporting, or CAD drawing.

In front of every design object is a check box. Only the objects that are checked will be included in the common report and reinforcing bar schedule.

The basic steps in using the program are:

- Open a Project File from menu [Files].
- Select a design object, from the [Design objects] window, or create a new one from the action buttons at the top of the main program window.
- Activate the computations of the object, by double clicking the design object or by clicking the computations button. If it is a new object the computations are activated automatically.
- In the object's calculation window enter the necessary data for the particular design object and do the computations.
- In the calculation window you may see the drawing of the object, its reinforcement lay out, and you may preview or print the report of that particular design object.
- Check the objects you would like to appear in the report, and adjust their order of appearance in the [Design objects] window.
- Preview and Print the report and the reinforcing bar schedules, for the marked objects.
- Specify the design and code parameters, and the default values from the menu Parameters
- Adjust the report appearance and the contents. Adjust also the units used in the report.
- Adjust program appearance and basic parameters.

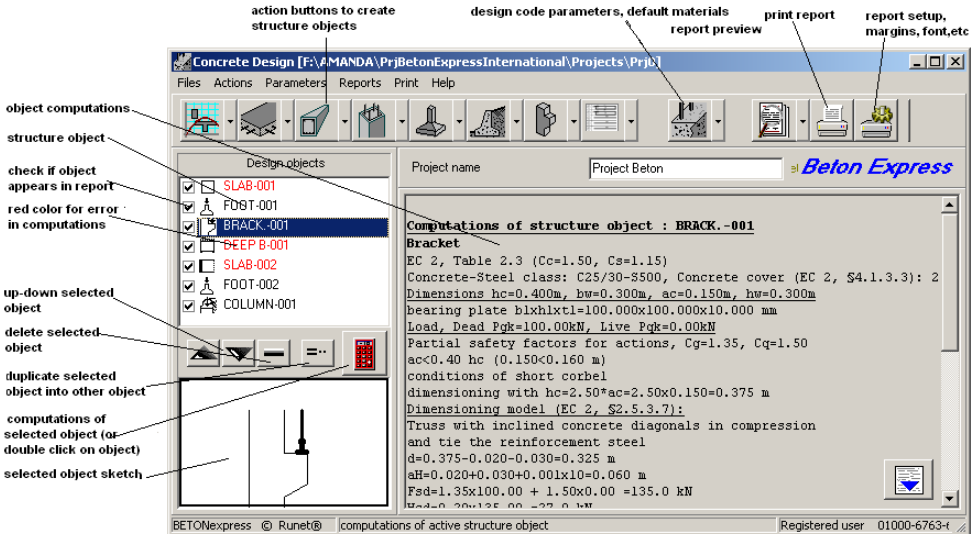

4. Design objects

The design objects can be a variety of concrete parts of a structure such as : slabs, beams, columns, footings, retaining walls, corbels, deep beams.

We will refer to these calculations as design objects, concrete objects or structural objects.

You create the design objects with the action buttons on the top. In a project you may create as many design objects, as you want. Automatically the program gives a default name to each object, (which you may change), and assigns a small characteristic icon in front to recognize the type of the design object.

The design objects are autonomous and each one has its own drawings, material properties and computations. All the design objects of the project are listed in the window at the left, which is the basic window in working with the design objects. By selecting (clicking at) an object, the corresponding computations appear on the right window. If the object appears in red colour, the computations have errors or are not satisfying. The sketch of the selected design object appears underneath.

With double clicking on a design object you enter its calculation window. With right clicking on a design object you can select actions like computations, report previewing and printing exporting, or drawing.

The objects checked in front, ☑ are included in the report, and the reinforcing bar schedules. A common report and reinforcing bar schedule is produced from the selected objects. In the Report Setup you may specify the report of each design object to start in a new page.

The order of the objects (which is also the order of appearance in the report), is regulated with the two buttons  . You can delete one or more selected objects by clicking at Del key or , (multiple selection of design objects with [Shift] and mouse click, or [Ctrl] and mouse click). You can duplicate a selected object by clicking at .

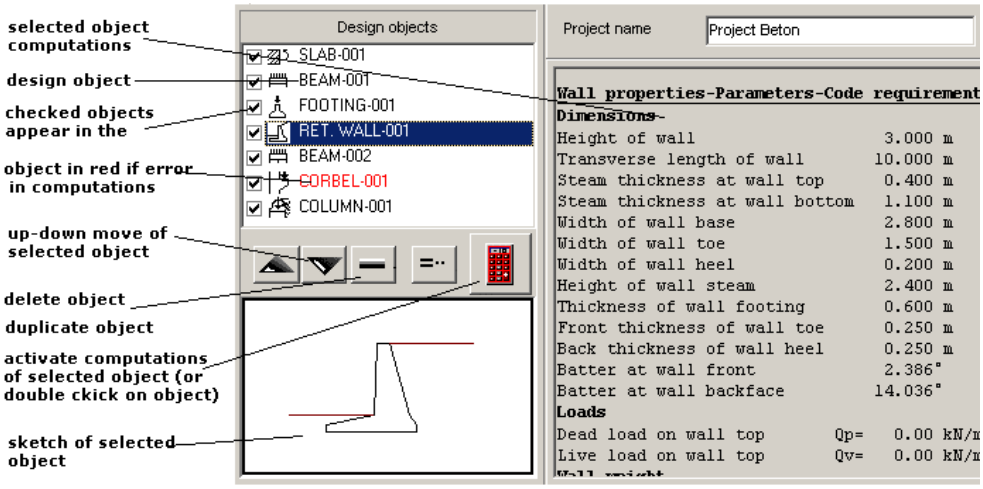
selected object computations
design object
checked objects appear in the
object in red if error in computations
up-down move of selected object
delete object
duplicate object
activate computations of selected object (or double ckick on object)
sketch of selected object
Design objects
SLAB-001
BEAM-001
FOOTING-001
RET. WALL-001
BEAM-002
CORBEL-001
COLUMN-001
Project name
Project Beton
Wall properties-Parameters-Code requirement
Dimensions-
Height of wall 3.000 m
Transverse length of wall 10.000 m
Steam thickness at wall top 0.400 m
Steam thickness at wall bottom 1.100 m
Width of wall base 2.800 m
Width of wall toe 1.500 m
Width of wall heel 0.200 m
Height of wall steam 2.400 m
Thickness of wall footing 0.600 m
Front thickness of wall toe 0.250 m
Back thickness of wall heel 0.250 m
Batter at wall front 2.386°
Batter at wall backface 14.036°
Loads
Dead load on wall top Qp= 0.00 kN/m
Live load on wall top Qv= 0.00 kN/m

5. Calculation Window

A calculation window has a typical sketch of the concrete object that is to be designed. All the necessary input data are marked with their dimensions. Depending on the speed of the computer the user can choose to have the computations performed simultaneously with the data input/change or when clicking the button [Computations]

The calculations appear in the window underneath. This window can expand by clicking [Report Up]. Warnings and errors for inadequate design values are shown in red in the calculations.

You can enter a CAD drawing of the concrete component by clicking [Drawing], or by double clicking at the centre of the sketch of the concrete object. The size of the letters in the object graph can be adjusted from Report Setup.

When the object is created all the parameters take default values. A check is always made for wrong or erroneous input values. After the computations an OK or Error (in red) message is shown on top left. By clicking at Drawing a detailed drawing appears. With Preview and Print the full report of that object may be previewed or printed. From this preview you can export the report to PDF or Word file.

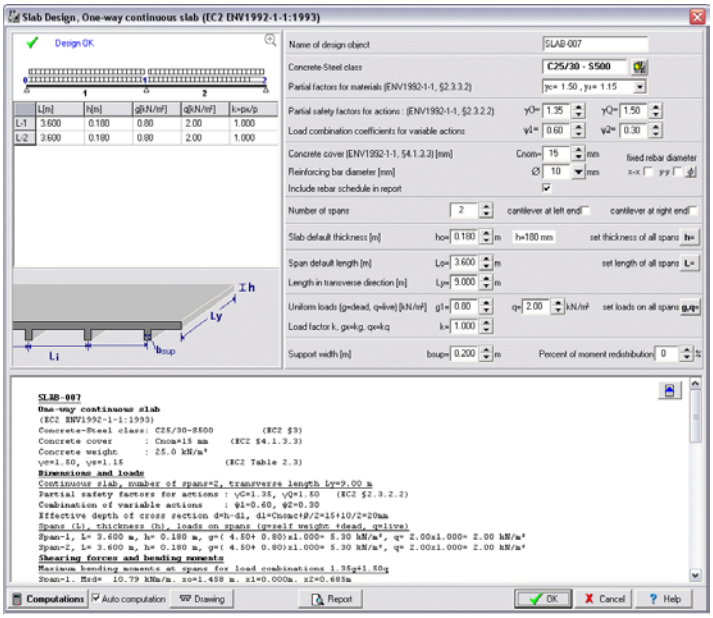
Slab Design, One-way continuous slab (EC2 ENV1992-1-1:1993)
Design OK
Name of design object
SLAB-007
Concrete-Steel class
C25/30 - S500
Partial factors for materials (ENV1992-1-1, §2.3.3.2)
Partial safety factors for actions : (ENV1992-1-1, §2.3.2.2)
Load combination coefficients for variable actions
Concrete cover (ENV1992-1-1, §4.1.3.3) [mm]
Reinforcing bar diameter [mm]
Include rebar schedule in report
Number of spans
cantilever at left end
cantilever at right end
Slab default thickness [m]
set thickness of all spans
Span default length [m]
set length of all spans
Length in transverse direction [m]
Uniform loads [g=dead, q=live] [kN/m²]
set loads on all spans
Load factor k, gx=kg, qx=kq
Support width [m]
Percent of moment redistribution
SLAB-007
One-way continuous slab
(EC2 ENV1992-1-1:1993)
Concrete-Steel class: C25/30-S500 (EC2 §3)
Concrete cover : Cnom=15 mm (EC2 §4.1.3.3)
Concrete weight : 25.0 kN/m³
γc=1.50, γs=1.15 (EC2 Table 2.3)
Dimensions and loads
Continuous slab, number of spans=2, transverse length Ly=9.00 m
Partial safety factors for actions : γG=1.35, γQ=1.50 (EC2 §2.3.2.2)
Combination of variable actions : ψ1=0.60, ψ2=0.30
Effective depth of cross section d=h-d1, d1=Cnom+Ø/2=15+10/2=20mm
Spans (L), thickness (h), loads on spans (g=self weight +dead, q=live)
Span-1, L= 3.600 m, h= 0.180 m, g=(4.50+ 0.80)x1.000= 5.30 kN/m², q= 2.00x1.000= 2.00 kN/m²
Span-2, L= 3.600 m, h= 0.180 m, g=(4.50+ 0.80)x1.000= 5.30 kN/m², q= 2.00x1.000= 2.00 kN/m²
Shearing forces and bending moments
Maximum bending moments at spans for load combinations 1.35g+1.50q
Span-1, Msd= 10.79 kNm/m, xo=1.458 m, x1=0.000m, xf=0.685m
Computations
Auto computation
Drawing
Report
OK
Cancel
Help

6. Files

You create, open and save files. The data are saved automatically as you change them and you do computations. All the structure objects are saved in the same unique file with an extension [BetonExpressData]. When you specify a new file name you don't have to type in the extension.

7. Units

The units used in the program are **SI (**System International Metric) units. The unit of any input value is marked next to the place you enter the data. The unit of every value in the report is also marked.

Units used in the program:

length [m] .
forces [kN]
moments [kNm]
stresses [N/mm²] = [GPa]
concentrated loads [kN]
distributed loads [kN/m²]
line loads [kN/m]

reinforcing bar diameter [mm]
concrete cover [mm]

You can select the units for the reinforcement in the report from [Setup/Units in report]

8. Step by step, program use

Open a Project File. Use New for new project and Open for an existing project file. All the data are saved in the same file. The data are saved automatically.



Create a new Design object, From the drop-down buttons on the top, automatically you enter the computation window for this object.

You may select an existing design object, from the [Design objects] window, and activate the computations by double clicking at the object, e.g. Footing-001, or by clicking at .

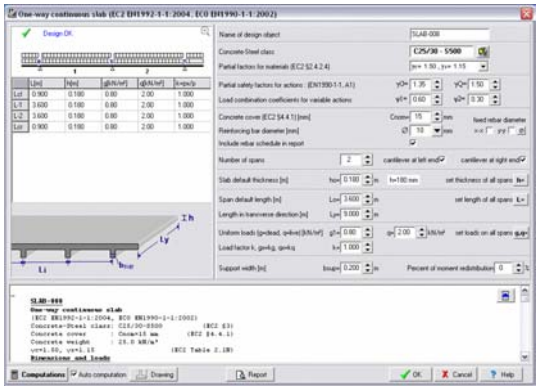

In the window with the computations, enter the necessary data for the particular design object and click on



.

When the Auto-computation is checked, the calculations are performed automatically when you change the data.

Click to see more of calculations.

All the computations for the design object are performed.

A message appears if design is OK, the computations and the dimensions are adequate.

Error, Inadequate design

If the design has problems due to inadequate dimensions this message will appear.

Automatic generation of CAD drawings.

Preview report. From preview you can export the file to PDF or Word format.



Select (check) the objects you want to include in the report. With the arrows you can adjust their order of appearance in the report. In the report only the objects checked in front will appear.

Report setup. Adjust the appearance of the report. You can adjust: font size, margins, captions and footnotes, line distances, character font, new page after each object printout, line thickness and paragraph indentation

Print the report

9. Parameters

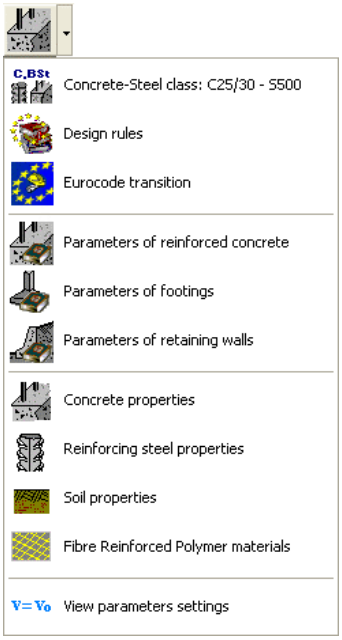

By setting various design parameters you adapt the Eurocodes to the native requirements, according to the National Application Documents. You update and set the material and soil properties, and you set default values for various design requirements.

From the Parameters you set:

Concrete and Steel class, default values for concrete and steel class.

Design Rules, select the design code you want to use, Eurocode 2 or native code for concrete design, Eurocode 7 or allowable stresses for foundation design, Eurocode 6 or allowable stresses for gravity wall design, seismic design or not.

Eurocode transition, select EN or ENV version of Eurocodes to apply in the design.

Parameters of reinforced concrete, you adjust the load factors and you set the default values for concrete cover, default rebar diameters, minimum and maximum rebar requirements for slabs, beams, columns, footings and retaining walls.

Parameters of footing design, you adjust the partial safety factors for Eurocode 7, and the coefficients for the foundation analysis with allowable stresses.

Parameters of retaining walls, you adjust the partial safety factors for Eurocode 7, and the coefficients for the wall stability analysis with allowable stresses, participation factor of passive earth pressure, etc.

Concrete properties, **Reinforcing steel properties**, **Soil properties**, **Fibre Reinforced Polymer (FRP) materials**, you adjust the characteristic properties according to the requirements of your region. For this it is advisable to consult the National Application Document of the Eurocodes 2, 7 and 1. You select also the default properties for concrete, reinforcing steel and soil to be used in the program.

In order to edit the material properties or other design parameters, first you have to click

, to unlock the edit procedures.

9.1 Concrete and steel class

Select the default values for concrete class and reinforcing steel class.

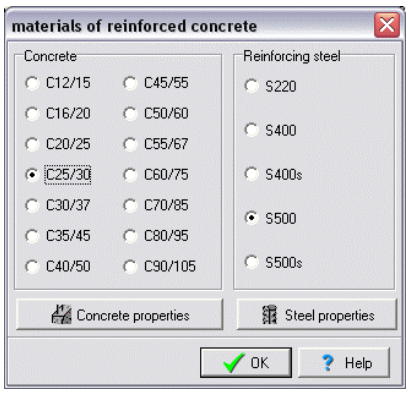

9.2 Design rules

Options:

Reinforced Concrete Design

- According to Eurocode 2
- Native Concrete Design Code (if available)

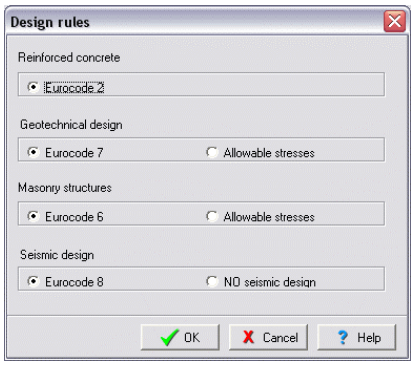

Geotechnical design for footings and retaining walls

- Ultimate Limit State Design, according to Eurocode 7.
- Working Stress Design (allowable stresses)

Design of gravity type retaining walls

- Ultimate Limit State Design, according to Eurocode 6
- Working Stress Design (allowable stresses)

Seismic design

- Seismic design, (in footings, and in retaining walls), according to Eurocode 8
- No seismic design.

9.3 Eurocode Transition (insert screen)

Eurocode transition, select EN or ENV version of Eurocodes to apply in the design.

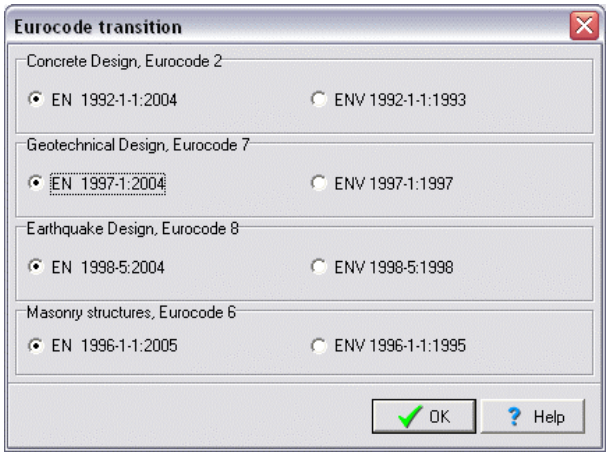

9.4 Parameters of reinforced concrete

Default values for parameters of the reinforced concrete design

Default values for action coefficients for permanent and variable actions and load combination coefficients for variable actions, Eurocode 0, EN 1990:2002.

Default values for concrete cover, minimum mean and maximum steel bar diameters and spacing for slabs beams columns and footings

These parameters may be adjusted according to the design code requirements and National Application Document for Eurocode 2.

In the design of a concrete member the mean reinforcing steel diameter is used as a default value. The minimum and maximum values for the steel bar diameters are the low and upper limits of the bar diameters which are used in the design.

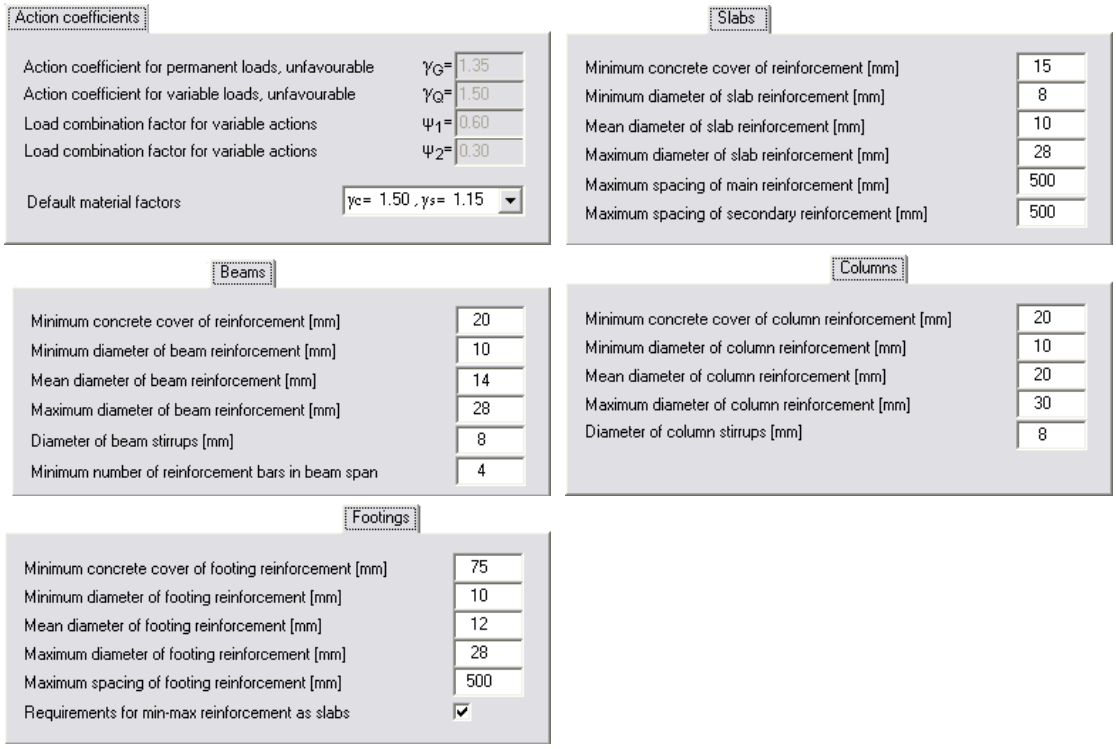
Action coefficients
Action coefficient for permanent loads, unfavourable γG= 1.35
Action coefficient for variable loads, unfavourable γQ= 1.50
Load combination factor for variable actions Ψ1= 0.60
Load combination factor for variable actions Ψ2= 0.30
Default material factors γc= 1.50 , γs= 1.15
Slabs
Minimum concrete cover of reinforcement [mm] 15
Minimum diameter of slab reinforcement [mm] 8
Mean diameter of slab reinforcement [mm] 10
Maximum diameter of slab reinforcement [mm] 28
Maximum spacing of main reinforcement [mm] 500
Maximum spacing of secondary reinforcement [mm] 500
Beams
Minimum concrete cover of reinforcement [mm] 20
Minimum diameter of beam reinforcement [mm] 10
Mean diameter of beam reinforcement [mm] 14
Maximum diameter of beam reinforcement [mm] 28
Diameter of beam stirrups [mm] 8
Minimum number of reinforcement bars in beam span 4
Columns
Minimum concrete cover of column reinforcement [mm] 20
Minimum diameter of column reinforcement [mm] 10
Mean diameter of column reinforcement [mm] 20
Maximum diameter of column reinforcement [mm] 30
Diameter of column stirrups [mm] 8
Footings
Minimum concrete cover of footing reinforcement [mm] 75
Minimum diameter of footing reinforcement [mm] 10
Mean diameter of footing reinforcement [mm] 12
Maximum diameter of footing reinforcement [mm] 28
Maximum spacing of footing reinforcement [mm] 500
Requirements for min-max reinforcement as slabs

9.5 Parameters of footings

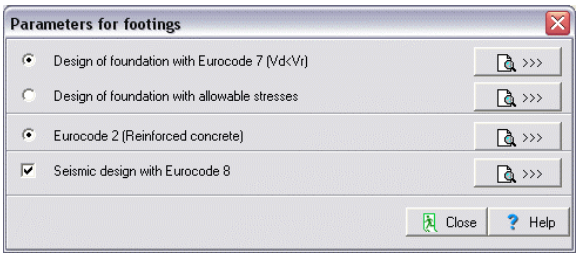

These parameters may be adjusted according to the design code requirements and National Application Document for Eurocode 7.

In order to edit the material properties or other design parameters, first you have to click Locked, to unlock the edit procedures.

9.5.1 Design according to Eurocode 7

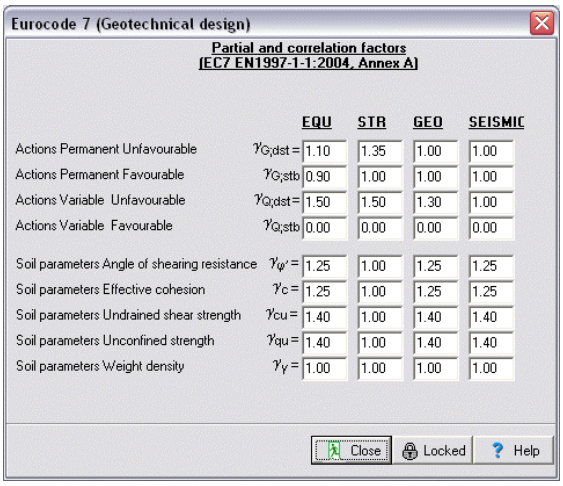
Eurocode 7 (Geotechnical design)
Partial and correlation factors
(EC7 EN1997-1-1:2004, Annex A)
EQU STR GEO SEISMIC
Actions Permanent Unfavourable γG;dst = 1.10 1.35 1.00 1.00
Actions Permanent Favourable γG;stb 0.90 1.00 1.00 1.00
Actions Variable Unfavourable γQ;dst = 1.50 1.50 1.30 1.00
Actions Variable Favourable γQ;stb 0.00 0.00 0.00 0.00
Soil parameters Angle of shearing resistance γφ' = 1.25 1.00 1.25 1.25
Soil parameters Effective cohesion γc = 1.25 1.00 1.25 1.25
Soil parameters Undrained shear strength γcu = 1.40 1.00 1.40 1.40
Soil parameters Unconfined strength γqu = 1.40 1.00 1.40 1.40
Soil parameters Weight density γγ = 1.00 1.00 1.00 1.00
Close
Locked
Help

Partial safety factors as defined in Eurocode 7 Annex A, for EQU, STR and GEO limit cases. You can adjust them according to the requirement of National Application Document.

9.5.2 Design with allowable stresses

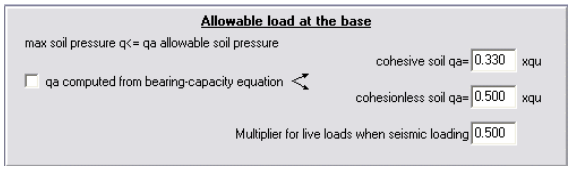
Allowable load at the base
max soil pressure q<= qa allowable soil pressure
qa computed from bearing-capacity equation
cohesive soil qa= 0.330 xqu
cohesionless soil qa= 0.500 xqu
Multiplier for live loads when seismic loading 0.500

When you design with allowable stresses and seismic loading, a part only of the live loads must be considered. This part is defined by a factor specified in these parameters.

9.5.3 Reinforced concrete design

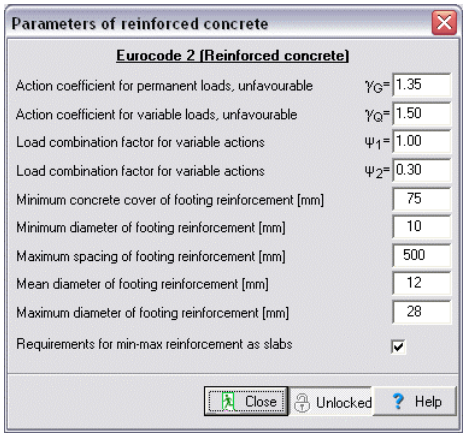
Parameters of reinforced concrete
Eurocode 2 (Reinforced concrete)
Action coefficient for permanent loads, unfavourable γG= 1.35
Action coefficient for variable loads, unfavourable γQ= 1.50
Load combination factor for variable actions Ψ1= 1.00
Load combination factor for variable actions Ψ2= 0.30
Minimum concrete cover of footing reinforcement [mm] 75
Minimum diameter of footing reinforcement [mm] 10
Maximum spacing of footing reinforcement [mm] 500
Mean diameter of footing reinforcement [mm] 12
Maximum diameter of footing reinforcement [mm] 28
Requirements for min-max reinforcement as slabs
Close
Unlocked
Help

Default values for action coefficients for permanent and variable actions, and load combination coefficients for variable actions. Default values for concrete cover, and minimum mean and maximum steel bar diameters and maximum spacing for reinforcement.

In the design of footings the mean reinforcing steel diameter is used as a default value. The minimum and maximum values for the steel bar diameters are the low and upper limits of the bar diameters which are used in the design. The spacing of the reinforcing bars in the design of footings will not exceed the maximum spacing specified in these parameters.

Requirements for min-max reinforcement as slabs. If checked the minimum and maximum steel percentages are computed according to Eurocode 2 §9.3.1. (Eurocode 2 does not mention anything about the min-max steel percentages for footings).

9.5.4 Seismic design

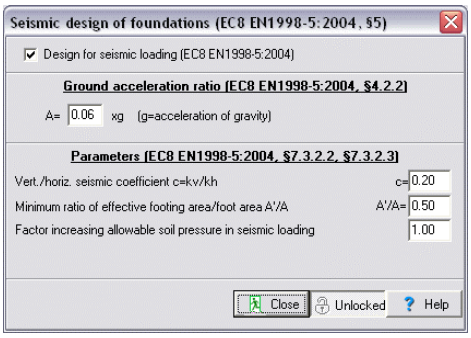
Seismic design of foundations (EC8 EN1998-5:2004, §5)
Design for seismic loading (EC8 EN1998-5:2004)
Ground acceleration ratio (EC8 EN1998-5:2004, §4.2.2)
A= 0.06 xg (g=acceleration of gravity)
Parameters (EC8 EN1998-5:2004, §7.3.2.2, §7.3.2.3)
Vert./horiz. seismic coefficient c=kv/kh c= 0.20
Minimum ratio of effective footing area/foot area A'/A A'/A= 0.50
Factor increasing allowable soil pressure in seismic loading 1.00
Close
Unlocked
Help

The seismic design for footings is according to Eurocode 8 Part 5. Some factors although for the seismic design must be adjusted according to the National Application Document of Eurocode 8, or the native design code for earthquake resistance of structures.

Seismic design. You specify the default option for designing or not for seismic loading.

Design ground acceleration. You specify the default design ground acceleration ratio α. The horizontal seismic acceleration is

taken as **ah=αxg** (where g is the acceleration of gravity).

Additional factors according to Eurocode 8.

The vertical seismic coefficients is taken according to Eurocode 8 Part 5,§ 7.3.2.2 as: **kv=cxkh**. The usual value for coefficient **c** (Eurocode 8 Part 5,§ 7.3.2) is **c=0.50**.

In seismic design, you can specify a limit for the load eccentricity on the footing. Specifying a limit value for the effective footing area, it sets an upper limit to the eccentricity of the load. The upper limit for the ratio of the (effective footing area)/(footing area) can be specified. (effective footing area is considered the contact area of footing and soil). This coefficient has a usual value 0.50, which corresponds to load eccentricity ratio 0.33.

Increase of allowable soil bearing pressure. In seismic design, when you design with allowable stresses, you can increase the allowable soil pressure by a factor. In many design codes this factor is about 1.20 to 1.30.

9.6 Parameters of retaining walls

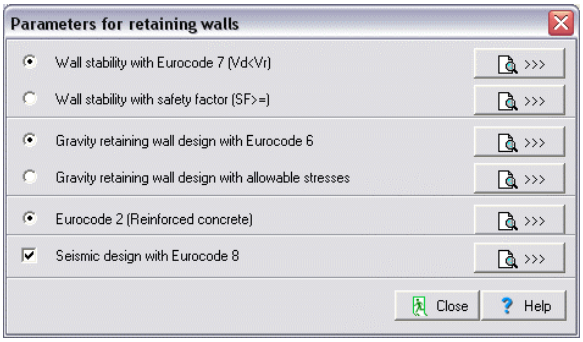
Parameters for retaining walls
Wall stability with Eurocode 7 (Vd<Vr)
Wall stability with safety factor (SF>=)
Gravity retaining wall design with Eurocode 6
Gravity retaining wall design with allowable stresses
Eurocode 2 (Reinforced concrete)
Seismic design with Eurocode 8
>>>
Close
Help

Default values for parameters of the design of retaining walls.

These parameters may be adjusted according to the design code requirements and National Application Document for Eurocode 2, 7 and 8.

9.6.1 Wall stability according to Eurocode 7

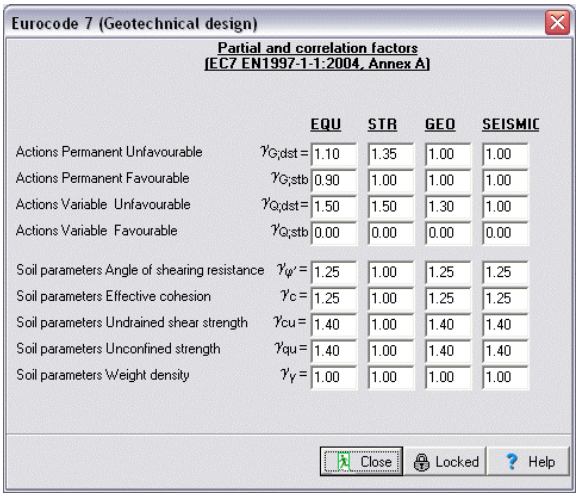
Eurocode 7 (Geotechnical design)
Partial and correlation factors
[EC7 EN1997-1-1:2004, Annex A]
EQU STR GEO SEISMIC
Actions Permanent Unfavourable γG;dst = 1.10 1.35 1.00 1.00
Actions Permanent Favourable γG;stb 0.90 1.00 1.00 1.00
Actions Variable Unfavourable γQ;dst = 1.50 1.50 1.30 1.00
Actions Variable Favourable γQ;stb 0.00 0.00 0.00 0.00
Soil parameters Angle of shearing resistance γψ' = 1.25 1.00 1.25 1.25
Soil parameters Effective cohesion γc = 1.25 1.00 1.25 1.25
Soil parameters Undrained shear strength γcu = 1.40 1.00 1.40 1.40
Soil parameters Unconfined strength γqu = 1.40 1.00 1.40 1.40
Soil parameters Weight density γγ = 1.00 1.00 1.00 1.00
Close
Locked
Help

Partial safety factors as defined in Eurocode 7 Annex A, for EQU STR and GEO limit cases. You can adjust them according to the requirement of National Application document.

9.6.2 Wall stability with allowable stresses

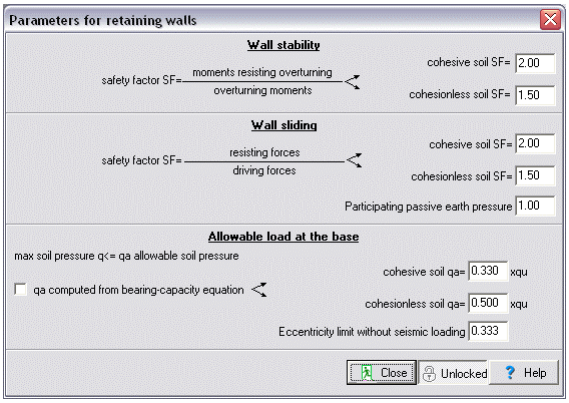
Parameters for retaining walls
Wall stability
safety factor SF= moments resisting overturning / overturning moments
cohesive soil SF= 2.00
cohesionless soil SF= 1.50
Wall sliding
safety factor SF= resisting forces / driving forces
cohesive soil SF= 2.00
cohesionless soil SF= 1.50
Participating passive earth pressure 1.00
Allowable load at the base
max soil pressure q<= qa allowable soil pressure
qa computed from bearing-capacity equation
cohesive soil qa= 0.330 xqu
cohesionless soil qa= 0.500 xqu
Eccentricity limit without seismic loading 0.333
Close
Unlocked
Help

Safety factors. Safety factors for wall stability (overturning), and sliding. Usual values for these safety factors are 1.50.

Participation factor for passive earth pressure. In designing with allowable stresses you can reduce the favourable effects of the passive earth pressure by the reduction factor, which you specify in this set of parameters.

Eccentricity limit. A limit in the eccentricity ratio (e/B e=load eccentricity, B= footing width) is imposed for the loading on the wall foundation.

9.6.3 Gravity retaining walls, (design according to Eurocode 6)

Properties of masonry wall materials.

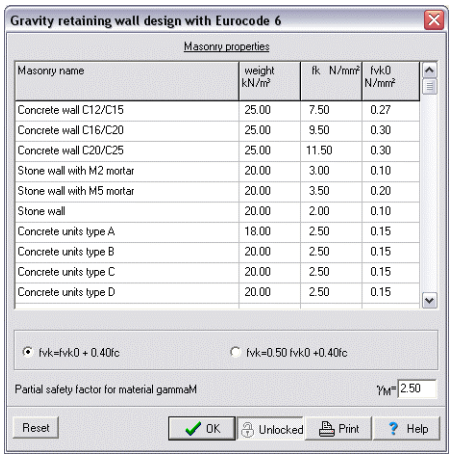
Gravity retaining wall design with Eurocode 6
Masonry properties
Masonry name
weight kN/m³
fk N/mm²
fvk0 N/mm²
Concrete wall C12/C15 25.00 7.50 0.27
Concrete wall C16/C20 25.00 9.50 0.30
Concrete wall C20/C25 25.00 11.50 0.30
Stone wall with M2 mortar 20.00 3.00 0.10
Stone wall with M5 mortar 20.00 3.50 0.20
Stone wall 20.00 2.00 0.10
Concrete units type A 18.00 2.50 0.15
Concrete units type B 20.00 2.50 0.15
Concrete units type C 20.00 2.50 0.15
Concrete units type D 20.00 2.50 0.15
fvk=fvk0 + 0.40fc
fvk=0.50 fvk0 +0.40fc
Partial safety factor for material gammaM
γM= 2.50
Reset
OK
Unlocked
Print
Help

fk [N/mm²] characteristic compressive strength of the masonry (Eurocode 6, §3.6.2)

fvk0 [N/mm²] characteristic shear strength (Eurocode 6, §4.5.3)

9.6.4 Gravity retaining walls (design with allowable stresses)

Properties of masonry wall materials.

fc [N/mm²] allowable compressive stress.

ft [N/mm²] allowable tensile stress.

fv [N/mm²] allowable shearing stress.

9.6.5 Reinforced concrete design

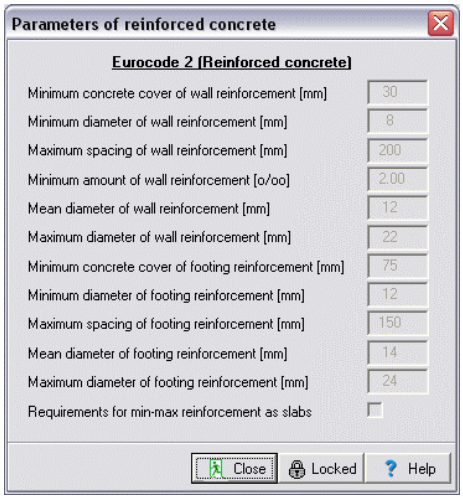
Parameters of reinforced concrete
Eurocode 2 (Reinforced concrete)
Minimum concrete cover of wall reinforcement [mm] 30
Minimum diameter of wall reinforcement [mm] 8
Maximum spacing of wall reinforcement [mm] 200
Minimum amount of wall reinforcement [o/oo] 2.00
Mean diameter of wall reinforcement [mm] 12
Maximum diameter of wall reinforcement [mm] 22
Minimum concrete cover of footing reinforcement [mm] 75
Minimum diameter of footing reinforcement [mm] 12
Maximum spacing of footing reinforcement [mm] 150
Mean diameter of footing reinforcement [mm] 14
Maximum diameter of footing reinforcement [mm] 24
Requirements for min-max reinforcement as slabs
Close
Locked
Help

Default values for concrete cover, minimum, mean, and maximum steel bar diameters, and maximum spacing for reinforcement for the retaining wall stem and the footing.

In the design of the wall stem and the footing the mean reinforcing steel diameter is used as a default value.

The minimum and maximum values for the steel bar diameters are the low and upper limits of the bar diameters which are used in the design.

The spacing of the bars in the steam and the footing, which is used in the design will not exceed the maximum spacing specified in these parameters.

Requirements for min-max reinforcement as slabs. If checked the minimum and maximum steel percentages for the wall footing are computed according to Eurocode 2 §9.3.1. (Eurocode 2 does not include anything about the min-max steel percentages for footings).

9.6.6 Seismic design

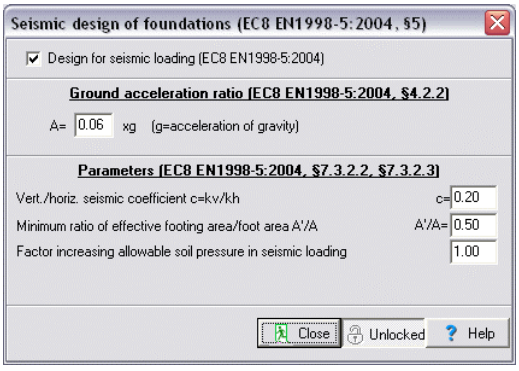
Seismic design of foundations (EC8 EN1998-5:2004, §5)
Design for seismic loading (EC8 EN1998-5:2004)
Ground acceleration ratio (EC8 EN1998-5:2004, §4.2.2)
A= 0.06 xg (g=acceleration of gravity)
Parameters (EC8 EN1998-5:2004, §7.3.2.2, §7.3.2.3)
Vert./horiz. seismic coefficient c=kv/kh c= 0.20
Minimum ratio of effective footing area/foot area A'/A A'/A= 0.50
Factor increasing allowable soil pressure in seismic loading 1.00
Close
Unlocked
Help

The seismic design is according to Eurocode 8. Some factors although for the seismic design must be adjusted according to the National Application Document of Eurocode 8 Part 5, or the native design code for earthquake resistance of structures.

Seismic design. You specify the default option for designing or not for seismic loading.

Design ground acceleration. You specify the default design ground acceleration ratio α. The horizontal seismic acceleration is taken as **ah=αxg** (where g is the acceleration of gravity).

Safety factors. In seismic design, when you design with allowable stresses, the safety factors against sliding and overturning maybe reduced towards 1.00.

Increase of allowable soil bearing pressure. In seismic design, when you design with allowable stresses, you can increase the allowable soil pressure by a factor. In some design codes this factor is about 1.20 to 1.30.

Additional factors according to Eurocode 8, Part 5.

The horizontal and vertical seismic coefficients affecting all the masses are taken according to Eurocode 8 Part 5,§ 7.3.2.2 as: **kh=α/r**, and **kv=cxkh**. The usual value for coefficient **r** according to Eurocode 8 Part 5, Table 7.1, for walls with possibility of small sliding is **r=2.00** to **1.50**. The usual value for the coefficient **c** according to Eurocode 8 Part 5, § 7.3.2.2 is **c=0.50**.

In seismic design, you can specify a limit for the load eccentricity on the wall footing. Specifying a limit value for the effective footing area, it sets an upper limit to the eccentricity of the load. The upper limit for the ratio of the (effective footing area)/(footing area) can be specified. (effective footing area is considered the contact area of footing and soil). This coefficient has an usual value 0.50, which corresponds to load eccentricity ratio 0.33.

According to Eurocode 8 Part 5, § 7.3.2 3 (6) the shearing resistance between soil and wall is restricted to be less than a ratio (2/3=0.67) of the soil shearing resistance.

In the seismic loadings, a reduction factor can be applied on the favourable effects of passive earth force. This factor has a usual value 0.50.

9.7 Soil properties

You can edit the values of the soil properties, from [Parameters/Soil properties].

insert and delete buttons.

γ_d: dry unit weight , γ_s: saturated unit weight

$\phi°$: angle of internal friction, **c**: cohesion

q_a**:** allowable bearing pressure, q_u: bearing capacity,

Es: modulus of elasticity, μ: Poisson ratio,

Ks: modulus of subgrade reaction.

Soil type	γd [kN/m³]	γs [kN/m³]	φ°	c [N/mm²]	qa [N/mm²]	qu [N/mm²]	Es [MPa]	μ	Ks [kN/m³]
Large gravel	16.00	20.00	45.00	0.00	0.30	0.50	60.00	0.15	200000
Mean gravel	16.00	20.00	40.00	0.00	0.30	0.40	70.00	0.15	140000
Thin gravel	16.00	20.00	35.00	0.00	0.30	0.40	60.00	0.15	100000
Dense sand	17.00	20.00	35.00	0.01	0.25	0.30	50.00	0.20	125000
Sand	15.00	19.00	30.00	0.00	0.25	0.30	25.00	0.20	90000
Loose sand	14.00	18.00	25.00	0.00	0.20	0.25	15.00	0.20	30000
Silty sand	21.00	23.00	25.00	0.00	0.15	0.15	10.00	0.25	80000
Clay	20.00	21.00	20.00	0.02	0.15	0.15	5.00	0.30	50000
Silt	16.00	20.00	20.00	0.00	0.10	0.10	2.00	0.25	50000

9.8 FRP Fibre Reinforced Polymer Materials

Fibre Reinforced Polymer materials (F.R.P.), are used as coatings to strengthen reinforced concrete components. Materials made from carbon (CFRP), glass (GFRP), or aramid (AFRP), bonded together with a polymeric matrix, such as epoxy, polyester or vinylester. These materials have high strength and stiffness in the direction of the fibres, low weight and they resist corrosion.

In order to edit the FRP material properties:

in order to unlock the edit procedures

insert and delete buttons.

Ef characteristic elastic tensile modulus [Gpa]

ftk characteristic tensile strength [Mpa]

Material	Modulus of elasticity Ef [GPa]	Tensile strength ftk [Mpa]
CFRP Carbon fiber-epoxy	140	2000
GFRP Glass fiber-epoxy	35	800
Polyester fiber-epoxy	5	1000
AFRP Aramid fiber-epoxy	50	2000
FRP Fiber - epoxy	10	1000

9.9 Reset all parameters

From the menu [Setup/ Show all parameters] setting you can see the default values you have chosen for your designs. You can any time change the parameters from inside the calculation window.

If you want to reset all your parameters to the original values of the program, press the button

If you reset all parameters ALL your user defined values will be LOST.

Program will close down and you must restart the program.

10. General input data for concrete components

Most of the concrete design objects have some basic common data as follows:

- Name of design object
- Concrete and reinforcing steel class
- Material factors
- Partial safety factors for actions
- Load combination coefficients for variable actions
- Concrete cover
- Reinforcing bar diameter
- Include rebar schedule in report

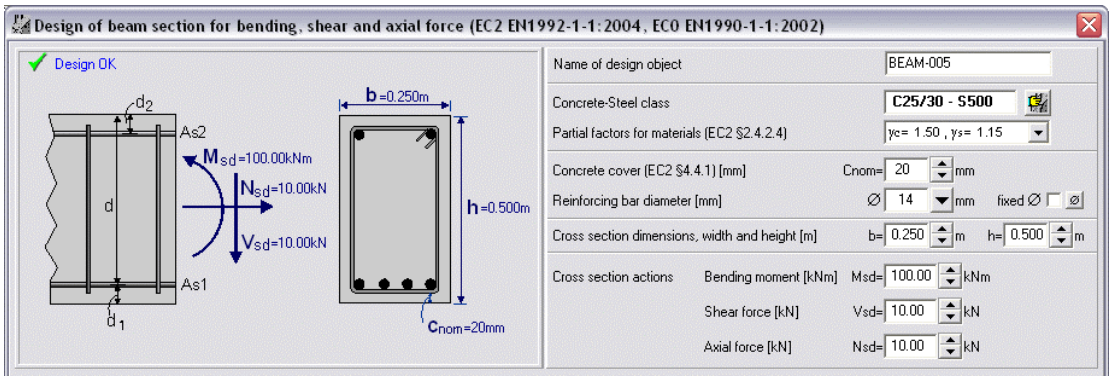

10.1.1 Name of design object

Every design object has a name, which appears in the report. In the creation of each object the program assigns a default name e.g. slab-001, Beam-002 etc. which may be changed any time. (names up up to 16 characters long)

10.1.2 Concrete-Steel Class

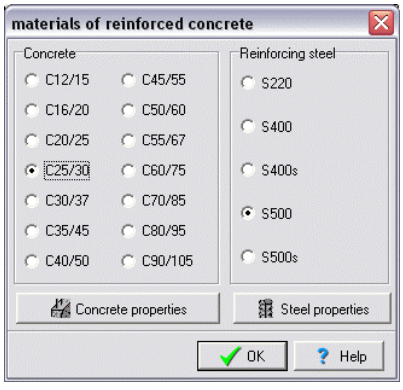

Concrete and steel classes used in the calculations of the design object. When a design object is created the concrete and steel classes are set automatically to the default values. The default values for the program are set from [Parameters/Concrete and Steel class].

10.1.3 Reinforcing bar diameter



You specify the reinforcing bar diameter, which is used in the design of the concrete object.

If you check

then only the selected bar diameter will be used in the design of the concrete element. If you do not check next to the bar diameter, the reinforcing bar diameter which is going to be selected in the design, is going to be a bar diameter, resulting in economical reinforcement. If the selected diameter although is outside the limits (minimum and maximum rebar diameter) is not going to be used. The

lower and upper limits of rebar diameters for the concrete objects are specified in [Parameters/parameters for reinforcing concrete], [Parameters/Parameters of footings], [Parameters/Parameters of retaining walls].

The initial values for the reinforcing bar diameter, when a design object is created, are the ones specified in the [Parameters/Reinforced Concrete]. The rebar diameter for beam stirrup reinforcement is defined in [Parameters/Reinforced Concrete].

To select other bar diameter click the arrow and choose from the standard diameters for reinforcing bars.

10.1.4 Partial safety factors for actions (Eurocode 0, Annex A1)



Factors for the combination of permanent and variable actions, Eurocode 0 Annex A 1.

The values defined in Eurocodes for these factors are **γG=1.35**, and **γQ=1.50**

The design values for actions are combined as:

$$\Sigma\gamma G,j\ Gk,j + \gamma Q,1\ Qk,1 + \Sigma\gamma Q,i\ \psi Q,i\ Qki$$

10.1.5 Partial safety factors for materials (Eurocode 2 §2.4.2.4 Table 2.1.N)

Factors to take account for the differences between the strength of test specimens of the structural material and their strength in situ. (Eurocode 2 §2.4.2.4 Table 2.1.N)

The design strength of the materials is **fd=fk/γm** where **γm** is the material factor, **γc** for concrete, and **γs** for reinforcing steel.

Table 2.1N

Design situations	γ_c concrete	γ_s reinforcing steel	γ_s prestressing steel
Persistent & Transient	1,5	1,15	1,15
Accidental	1,2	1,0	1,0

10.1.6 Concrete cover (Eurocode 2 §4.4.1.2)

Concrete cover **Cnom** is the distance between the outer surface of the reinforcement and the nearest concrete surface. Minimum required concrete cover depending on the environmental conditions is given in Eurocode 2 §4.4.1.2.

In general: The minimum cover for dry environment and for interior of buildings is 15 mm, for humid environment without frost 20 mm, and for humid environment with frost 25 mm. For more severe environment as humid environment with frost and de-icing salts, or seawater environment, for interior and exterior concrete components the minimum cover is 40 mm.

10.1.7. Include rebar schedule in report.

If checked, the corresponding rebar schedule is included in the end of the report of each concrete object.

11. Concrete slabs

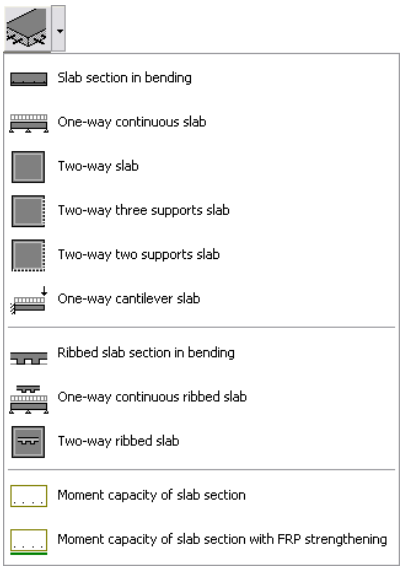
Slab section in bending
One-way continuous slab
Two-way slab
Two-way three supports slab
Two-way two supports slab
One-way cantilever slab
Ribbed slab section in bending
One-way continuous ribbed slab
Two-way ribbed slab
Moment capacity of slab section
Moment capacity of slab section with FRP strengthening

Dimensioning of concrete slabs of **solid** or **ribbed** cross section. You can design two-way slabs, or one-way multiple span concrete slabs, and compute the ultimate capacity of slabs sections and slabs with FRP (Fibre Reinforced Polymers) jackets. Full code check, according to Eurocode 2, is performed. A detailed report with all the computations, graphs, and code references is produced. The reinforcing bars are automatically placed in the reinforcing bar schedules.

The design actions are obtained with combination of permanent and variable actions $\gamma G\, Gk + \gamma Q\, Qk$, (Eurocode 0, EN 1990:2002).

The flexural reinforcement is computed according to Eurocode 2 § 6.1, in ultimate limit state for bending. The design in ultimate limit state of cracking is limited to the requirements of slenderness according to Eurocode 2 §7.4.2, Table 7.4N. The reinforcing steel detailing and minimum requirements are according to Eurocode 2 §8, §9.3. You specify the desired diameter for flexural reinforcement, and the spacing and number of reinforcing bars are obtained. You may check to use specific reinforcement diameter or the program optimises the reinforcement around the desired diameter. The reinforcing bars are automatically placed in the reinforcing bar schedules. The default diameter for longitudinal reinforcement is defined in [Parameters/Reinforced Concrete/Plates].

You can design the following slabs:

Slab sections. Design of slab section of solid or ribbed type subjected to a bending moment.

Two-way slabs. Three categories of two-way slabs are considered. Slabs supported on all four edges, slab supported on three edges and having one edge free, and slabs supported on two adjacent edges and having the other two free. The type of each edge support (simply supported or fixed), can be specified for each slab side. Linear elastic theories are used for the computation of bending moments. Marcus method, or tables by Czerny or Bares of linear analysis are used for the computation of the bending moments.

One-way multiple span slab. Design of one-way continuous slabs up to 8 spans with optional end cantilevers, and uniform load with dead and live components on the spans. The lengths, the slab height and the loading may be specified for every span. The static solution is performed with finite element analysis taking into account the most unfavourable placing of live loads on the spans in order to obtain the maximum or minimum design values for bending moments. The support moments are computed at the faces of the supports. The design moments can be modified by a moment redistribution, Eurocode 2 §5.5, if the percentage of moment redistribution is specified >0. A load factor <=1.00 can be specified for each span to introduce the load distribution in continuous 2-way slabs.

Cantilever slabs. Design of cantilever slabs of variable thickness. Uniformly distributed dead and live loads and concentrated line loads (dead and live) at the free end, can be specified.

Section capacity. Ultimate moment capacity of slab section with given reinforcement.

Section capacity with FRP jacket. Ultimate moment capacity of slab section with given reinforcement and strengthened with FRP (Fibre Reinforced Polymer) jacket.

11.1 Slabs section design

Design of slab section, of solid or ribbed type, subjected to a bending moment.

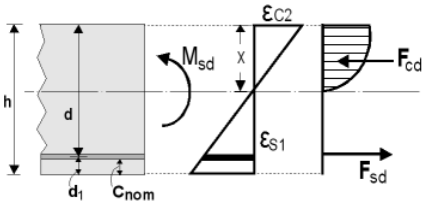

Ultimate Limit state for bending, Eurocode 2 §6.1.

Basic principles.

- Plane sections remain plain
- The strain in bonded reinforcement is the same as the surrounding concrete.
- The tensile strength of concrete is ignored.
- The stress-strain diagram for concrete and steel is as in the figures below.

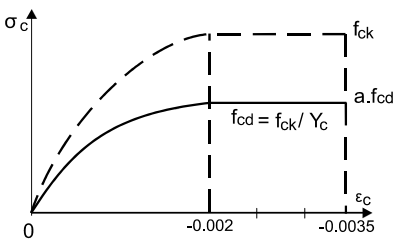



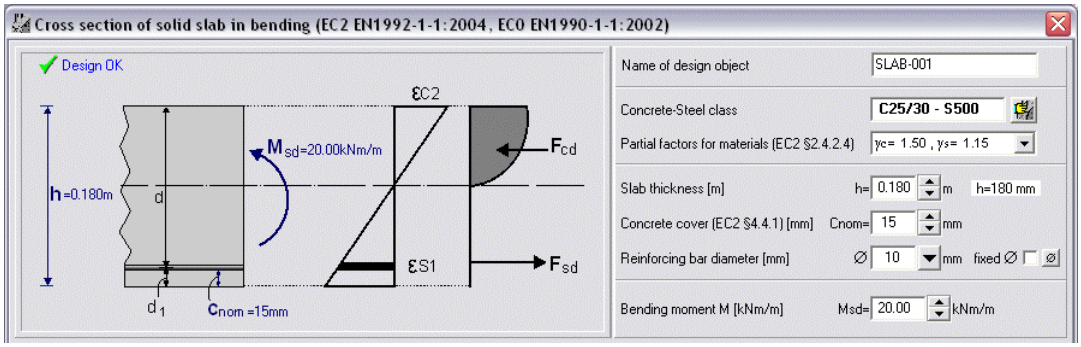

Slab thickness h in meters [m]. The minimum slab thickness according to Eurocode 2 §5.3.1 for solid slabs is 50 mm.

11.2 One-way multiple span slabs (up to 8 spans)

Design of one-way continuous slabs up to 8 spans with optional end cantilevers, and uniform dead and live loading on the spans. The slabs may have solid or ribbed cross section. The span length, the slab height and the loading can be specified for every span. Cantilevers at the left and right end can be specified. The loads are multiplied by a load factor k (default value 1.00). This factor is used for the load distribution when two dimensional in plane solution of a slab system is performed. On the right window you specify slab thickness, span length, and loads and by pressing the set button you set these values for all the spans. On the left window you can change values for each span.
Full code check, according to Eurocode 2, is performed. A detailed report with all the computations, graphs, and code references is produced. The reinforcing bars are automatically placed in the reinforcing bar schedules.
The design actions are obtained with combination of permanent and variable actions as in EN 1990:2002 (**γG Gk +γQ Qk)**. They are analysed as continuous beams with rectangular cross section of width 1.00 m. The static solution is performed with finite element analysis taking into account the most unfavourable live load placing on the spans in order to obtain the maximum or minimum design values for the bending moments.
The support moments are computed at the faces of the supports. The design moments are redistributed (EC2 §5.5), if the percentage of moment redistribution is specified >0. In the moment redistribution the negative support moments, calculated using linear elastic analysis, are reduced by the ratio of moment redistribution, with a corresponding increase of the positive span moments, such as the resulting moments along the plate remain in equilibrium.
The flexural reinforcement is computed according to Eurocode 2, §6.1, in ultimate limit state for bending. The design in ultimate limit state of cracking is limited to the requirements of slenderness according to Eurocode 2 §7.4.2 Table 7.4N. The reinforcing steel detailing and minimum requirements, are according to Eurocode 2 §8, §9.3.

You specify the desired diameter for flexural reinforcement, and the spacing and number of reinforcing bars is obtained. You may check to use specific reinforcement diameter or the program optimises the reinforcement around the desired diameter. The reinforcing bars are automatically placed in the reinforcing bar schedules. The default diameter for longitudinal reinforcement is defined in [Parameters/Reinforced Concrete/Plates].

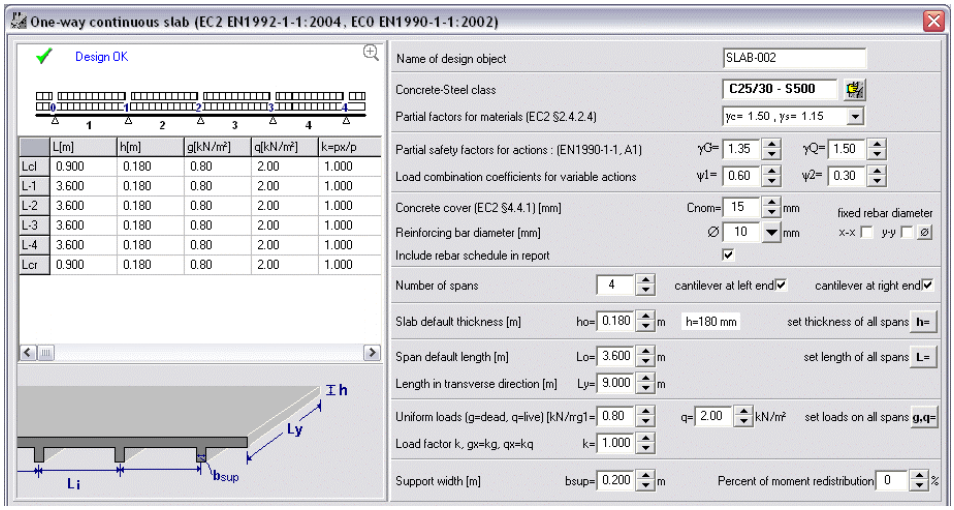
One-way continuous slab (EC2 EN1992-1-1:2004, EC0 EN1990-1-1:2002)
Design OK
L[m] h[m] g[kN/m²] q[kN/m²] k=px/p
Lcl 0.900 0.180 0.80 2.00 1.000
L-1 3.600 0.180 0.80 2.00 1.000
L-2 3.600 0.180 0.80 2.00 1.000
L-3 3.600 0.180 0.80 2.00 1.000
L-4 3.600 0.180 0.80 2.00 1.000
Lcr 0.900 0.180 0.80 2.00 1.000
h
Ly
Li
bsup
Name of design object
SLAB-002
Concrete-Steel class
C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4)
γc= 1.50 , γs= 1.15
Partial safety factors for actions : (EN1990-1-1, A1)
γG= 1.35 γQ= 1.50
Load combination coefficients for variable actions
ψ1= 0.60 ψ2= 0.30
Concrete cover (EC2 §4.4.1) [mm]
Cnom= 15 mm
Reinforcing bar diameter [mm]
Ø 10 mm
fixed rebar diameter
x-x y-y
Include rebar schedule in report
Number of spans 4
cantilever at left end
cantilever at right end
Slab default thickness [m]
ho= 0.180 m
h=180 mm
set thickness of all spans h=
Span default length [m]
Lo= 3.600 m
set length of all spans L=
Length in transverse direction [m]
Ly= 9.000 m
Uniform loads (g=dead, q=live) [kN/m]
g1= 0.80
q= 2.00 kN/m²
set loads on all spans g,q=
Load factor k, gx=kg, qx=kq
k= 1.000
Support width [m]
bsup= 0.200 m
Percent of moment redistribution 0 %

11.2.1 Slab thickness

Slab thickness ho, in meters [m], is the default slab thickness of the spans. Clicking at

the thickness at all spans is set to the default value. To set the thickness for each span click and edit the corresponding cells at the left window under the beam sketch.

11.2.2 Span length

Slab length Lo in meters [m], is the default span length. Clicking at

the span length is set to the default value at all the spans. At the cantilevers (if they exist) the span length is set to (1/4) of the default value. To set the span length for each span click and edit the corresponding cell at the left window under the beam sketch.

11.2.3 Number of spans

You specify the number of spans of the continuous slab. By checking cantilever at left or cantilever at right, you specify the existence of cantilevers at the left or the right end.

The spans are automatically created with the default length Lo, the default thickness ho, and the default loads g and q. From the left window you may change these values for span length L, thickness h, and loads g and q.

11.2.4 Loads

Default loads in [kN/m²], g1 for the dead load of the slab finishing, and q for the live load on the slab. From the left window under the slab sketch, you may change these default values for every span. The total dead load is computed by the program as g=(g1+self weight).

By clicking at

you set the values for the loads at all the spans to the default values.

The loads are multiply by a load factor k (default value 1.00), when two dimensional in plane solution of a slab system is performed. The design actions are obtained with combination of permanent and variable actions as in Eurocode EN 1990:2002, **γG Gk +γQ Qk).**

Load factor K. The loads are multiplied by a load factor k (default value 1.00). This factor is used for the load distribution when two dimensional in plane solution of a slab system is performed

11.2.5 Percent of moment redistribution



The support moments, in continuous slab, calculated using linear elastic analysis, are reduced by the ratio of **moment redistribution**, with a corresponding increase of the span moments, such as the resulting moments remain in equilibrium (Eurocode 2, §5.5). The ratio of redistributed moment, to the moment before redistribution, is defined by the user in percent (%).

11.2.6 Support width

Mean support width in meters (m). The design support moments, for the computation of the reinforcement over the supports, are computed at the support faces at a distance b=bsup/2 from the axis of the support.

11.3 Two-way slabs

Three categories of two-way slabs are considered.

Slabs supported on all four sides.

Slabs supported on three sides and with one side free.

Slabs supported on two adjacent sides and with the other two sides free.

Linear elastic theories are used for the computation of bending moments.

The design methodology for computing the bending moments is:

Tables of Czerny *Czerny F., Tafeln fur vierseitig und dreiseitig gelagerte Rechteckplatten , Beton Kalender 1983, Berlin, Ernst Sohn, 1983*

the values for bending moments are mx=q.Lx²/TV mx=q.Lx²/TV

for shear forces are vx:=±q.Lx/TV vx:=±q.Lx/TV

TV are coefficients obtained from tables for various Lx/Ly ratios and support conditions.

Tables of Bares *Bares R., Tables for the Analysis of Plates, Slabs and Diaphragms Based on the Elastic Theory, Bauverlag GmbH., Wiesbaden und Berlin 1971*

the values for bending moments are mx=q.Lx².TV, my=q.Ly².TV

for shear forces are vx:=±q.Lx.TV vx:=±q.Lx.TV

TV are coefficients obtained from tables for various Lx/Ly ratios and support conditions

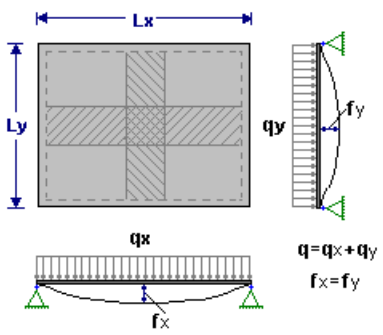

Marcus method of analysis. Marcus H., "*Die vereinfachte Barechnung biegsamer Platten*", 2nd ed., Springer-verlag, Berlin, 1929.

The method is based on two orthogonal strips of unit width at midspans having equal deflections in the middle. From this the total slab load **q** is split into two parts, in the two main directions, **qx=kq** and **qy=(1-k)q**. This simplified model does not take into account the transverse shear forces along the sides of the plate strips. These shear forces, caused by the continuity between individual plate strips produce torsional resistance, which reduces the deflections of the strips. The effect of torsional resistance of the plate in reducing the span moments, is taken care with additional approximate formulas introduced by Marcus.

The two directions x-x and y-y of the slab are designed separately. The direction with the maximum bending moment defines the lower reinforcement layer. Full code check, according to Eurocode 2, is performed. The reinforcing bars are automatically placed in the reinforcing bar schedules. The design actions are obtained by the combination of permanent and variable actions as in Eurocode 0, EN 1990:2002 (**γG Gk +γQ Qk).**

The flexural reinforcement is computed according to Eurocode 2 §6.1, in ultimate limit state for bending. The design in ultimate limit state of cracking is limited to the requirements of slenderness according to Eurocode 2 §7.42. Table 7.4N. The reinforcing steel detailing and minimum requirements are according to Eurocode 2 §8, §9.3.

You specify the desired diameter for flexural reinforcement, and the spacing and number of reinforcing bars is obtained. You can check to use specific reinforcement diameter or the program optimise the reinforcement around the desired diameter. The reinforcing bars are automatically placed in the reinforcing bar schedules. The default diameter for longitudinal reinforcement is defined in [Parameters/Reinforced Concrete/Plates].

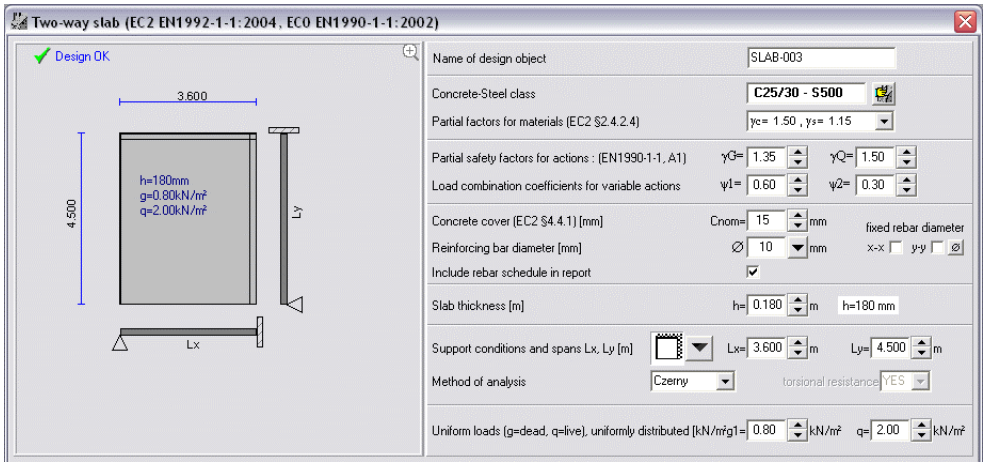

11.3.1 Support conditions

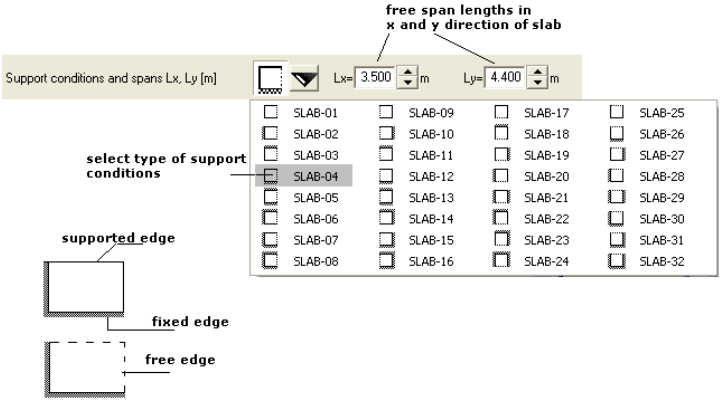

11.3.2 Torsional resistance



Specify to take into account or not the reduction of span moments due to the torsional resistance of the plate when you use Marcus method of analysis.

11.3.3 Loads

Loads in [kN/m²]. g1 for the dead load of the slab finishing, and q for the live load on the slab.

The design actions are obtained with combination of permanent and variable actions as in Eurocode 2 EN 1990:2002, **γG Gk +γQ Qk.** The total dead load is computed by the program as g=(g1+self weight).

11.4 Ribbed slabs

Slabs with voids, in order to reduce the self weight. They are designed as solid slabs, but the reinforcement is placed in the ribs. In the case of two-way ribbed slabs the torsional resistance is not taken into account. Additional data from the solid slabs are the rib (web) width **bw**, and the overhanging (void) width **b1**. Some requirements for ribbed or waffle slabs are in Eurocode 2 §5.3.1 (6)

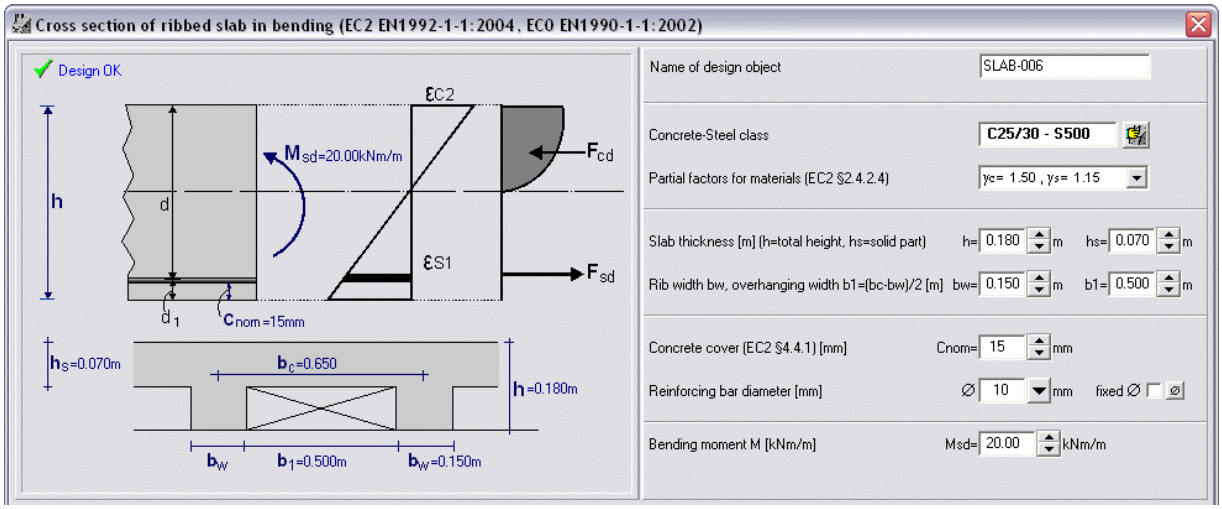

11.5 Cantilever slabs

Design of cantilever slabs of variable thickness. You can specify uniformly distributed load in [kN/m²] with dead and live components, and concentrated line loads in [kN/m] (dead and live components) at the free end. The design actions are obtained with combination of permanent and variable actions, (**γG Gk +γQ Qk**) (EN 1990:2002.). Full code check, according to Eurocode 2, is performed. The flexural reinforcement is computed according to Eurocode 2 §6.1, in ultimate limit state for bending. The design in ultimate limit state of cracking is limited to the requirements of slenderness according to Eurocode 2 §7.42. Table 7.4N. The reinforcing steel detailing and minimum requirements are according to Eurocode 2 §8, §9.3. A detailed report with all the computations, graphs, and code references is produced. The reinforcing bars are automatically placed in the reinforcing bar schedules.

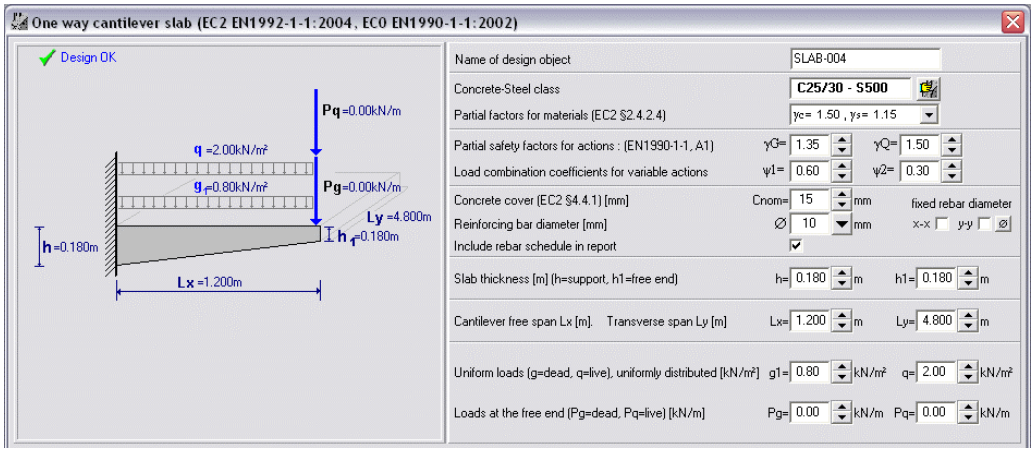

11.5.1 Slab thickness



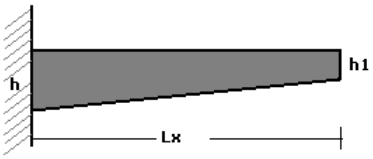

Slab thickness h at fixed end and h1 at free end in meters (m).

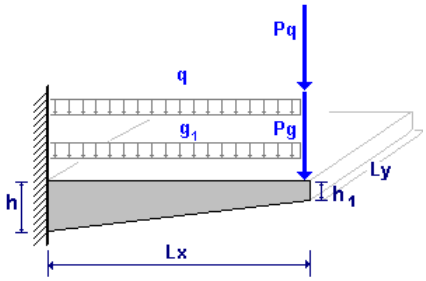

11.5.2 Loads


Loads (g=dead, q=live), uniformly distributed [kN/m²]
g1= 0.80 kN/m²
q= 5.00 kN/m²
Loads at the free end (Pg=dead, Pq=live) [kN/m]
Pg= 0.00 kN/m
Pq= 0.00 kN/m

Uniformly distributed loads in [kN/m²], g1 for the dead load of the slab finishing, and q for the live load on the slab. Pg [kN/m] is the dead concentrated load at the free end and Pq [kN/m] the live concentrated load at the free end.

The design actions are obtained with combination of permanent and variable actions as in Eurocode EN 1990:2002 **(γG Gk +γQ Qk).**

11.5.3 Free span

11.6 Slab section, moment capacity

Evaluation of the ultimate moment capacity, of a slab section with a given reinforcement.

The ultimate bending capacity of the cross section is computed, by numerical integration of the internal forces acting on the section. The internal forces are the forces due to compression of the concrete, and due to tension and compression of the steel at the positions of the reinforcing bars.

The following assumptions are used:

- Plain sections remain plane.
- Parabolic stress-strain distribution diagram for the compressive stresses of concrete.
- Elasto-plastic stress-strain relationship for the steel.
- Tensile stresses of concrete are ignored.

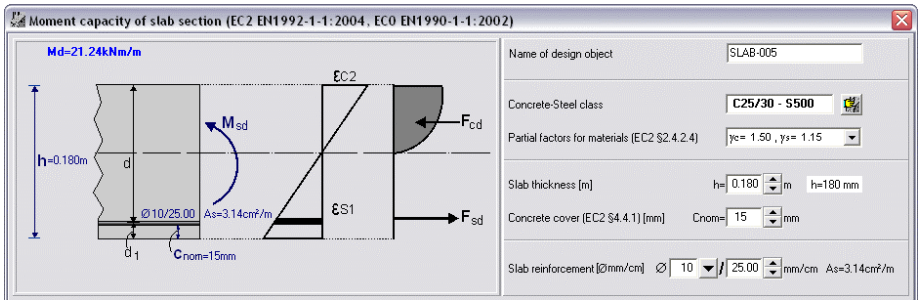

11.7 Slab section strengthened with FRP jacket (moment capacity)

Evaluation of the ultimate moment capacity of slab section, with a given reinforcement and strengthened with jacket from Fibre Reinforced Polymer (FRP) material.

For the cross section you specify:

- The concrete and steel class.
- The dimensions and the reinforcement.
- The characteristic properties (Modulus of Elasticity, Tensile strength) of the FRP material
- The dimensions (width, and thickness) of the FRP material
- The bending moment under service load without FRP jacket.

By clicking at you select FRP material from the table of FRP materials. You can edit and update the table of FRP materials from the menu [Parameters/FRP materials].

The ultimate bending capacity of the cross section is computed by numerical integration of the internal forces acting on the section. The internal forces are the forces due to compression of the concrete, due to tension and compression of the steel at the positions of the reinforcing bars, and due to compression and tension of the FRP jacket. The initial deformations under service load, (bending moment without FRP jacket) are taken into account in the evaluation of the stresses in the FRP jacket.

The following assumptions are used :

- Plain sections remain plane.
- Parabolic stress-strain distribution diagram for the compressive stresses of concrete.
- Elasto-plastic stress-strain relationship for the steel.
- Tensile stresses of concrete are ignored.
- Linear stress-strain relationship for the FRP material.

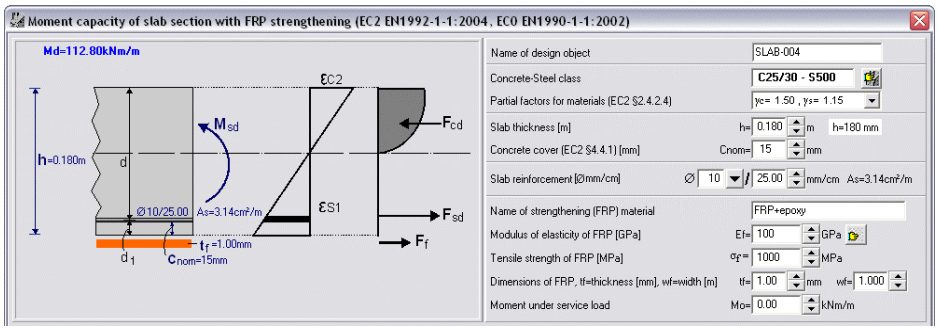

12. Beams

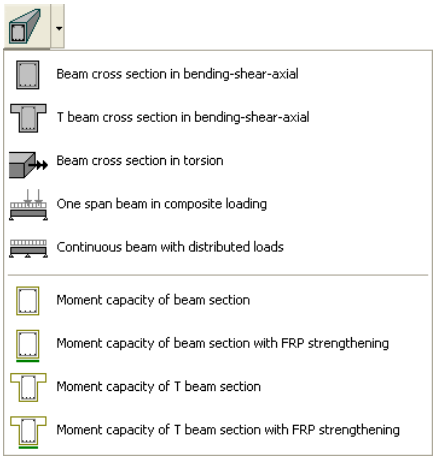
Beam cross section in bending-shear-axial
T beam cross section in bending-shear-axial
Beam cross section in torsion
One span beam in composite loading
Continuous beam with distributed loads
Moment capacity of beam section
Moment capacity of beam section with FRP strengthening
Moment capacity of T beam section
Moment capacity of T beam section with FRP strengthening

Dimensioning of concrete beams, of rectangular or T cross-section. You can design single or multiple span continuous beams, and compute the ultimate capacity of beam sections and beams strengthened with FRP (Fibre Reinforced Polymer) jackets. Full code check, according to Eurocode 2, is performed. A detailed report with all the computations, graphs, and code references is produced. The reinforcing bars are automatically placed in the reinforcing bar schedules.

The loads can have dead and live components. The design actions are obtained with combination of permanent and variable actions as in Eurocode EN 1990:2002 (**γG Gk +γQ Qk).**

The flexural reinforcement is computed according to Eurocode 2 § 6.1, in ultimate limit sate for bending. The shear reinforcement is computed according to Eurocode 2 §6.2. The design, in ultimate limit state of cracking, is limited to the requirements of cracking control of Eurocode 2 §7.3, and the requirements of slenderness according to Eurocode 2 §7.4. The reinforcing steel detailing and minimum requirements are according to Eurocode 2 §9.2. The number of reinforcing bars and stirrup spacing is computed. You may check to use specific reinforcement diameter or the program optimise the reinforcement around the desired diameter. The reinforcing bars are automatically placed in the reinforcing bar schedules.

You can design the following beam types:

Beam section. Design of a rectangular or T beam section subjected to combined bending and shear and axial force large and small eccentricity.

Torsion. Design of a rectangular or T shape beam section subjected to combined torsion shear and bending.

Single span beam in composite loading. Dimensioning of single span beam under composite loading. The beam cross section can be rectangular, T section, or edge beam. The effective flange width is evaluated according to Eurocode 2 §5.3.2.1. The left or right end support conditions of the beam may be specified as simply supported or fixed. The loading is the superposition of uniformly and triangularly distributed loads, and concentrated loads.

Multiple Span Beam. Design of continuous beams, up to 8 spans with optional end cantilevers, and uniform dead and live loading on the spans. The beam cross section can be rectangular, T section, or edge beam. The effective flange width is evaluated according to Eurocode 2 §5.3.2.1. The lengths, the cross section data and the loading may be specified for every span. The linear static analysis is performed taking into account the most unfavourable placing of the live loads on the spans to obtain the maximum or minimum design values for bending moments and shear forces. The support moments are computed at the faces of the supports. The design moments may be redistributed (Eurocode 2 EC2 §5.5), if the specified percentage of moment redistribution is >0.

Moment capacity. Evaluation of the ultimate capacity of a beam section with given reinforcement.

Moment capacity with FRP jacket. Evaluation of ultimate capacity of a beam section with given reinforcement, and strengthened with Fiber Reinforced Polymer (FRP) jacket.

12.1 Effective flange width

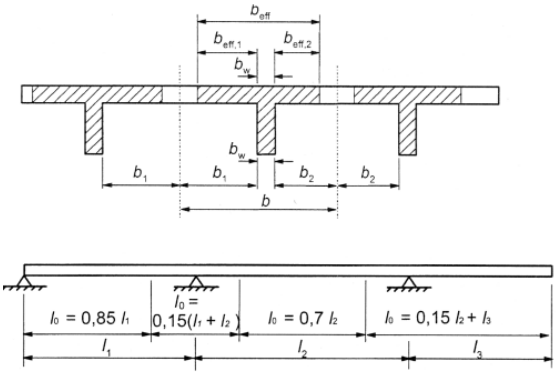

The effective flange width for symmetrical T beams may be taken as beff=bw+(1/5)Lo<b and for beams with flange at one side only as beff=bw+(1/10)Lo<b1+bw. Eurocode 2 §5.3.2.1(3).

The distance Lo is the distance between the point of zero moments in the span. In a continuous beam Lo may be taken as 0.85L for end span and 0.70L for internal spans Eurocode 2 §5.3.2.1(2).

12.2 Beam cross section data



All dimensions in meters (m).

12.3 Beam cross section subjected to bending- shear and axial load

Design of a rectangular or T beam section under combined bending and shear loading. The flexural reinforcement is computed according to Eurocode 2, § 6.1, in ultimate limit sate for bending. The shear reinforcement is computed according to Eurocode 2, § 6.2.

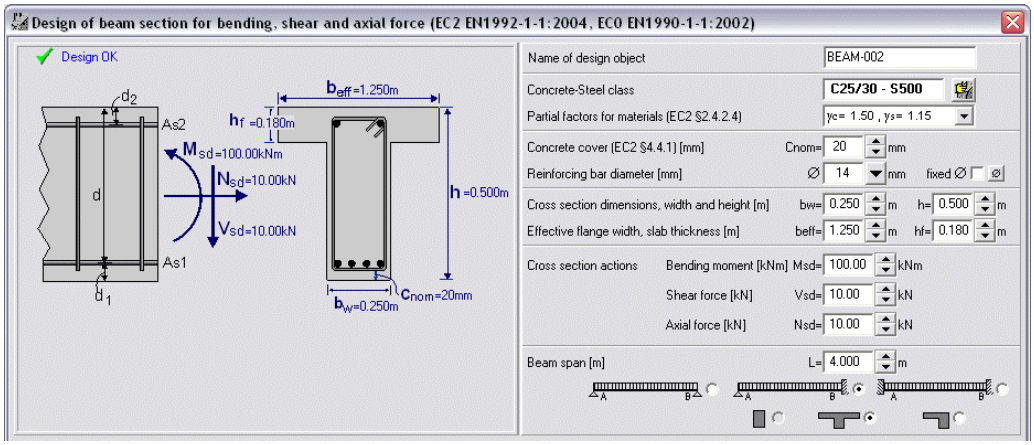
Design of beam section for bending, shear and axial force (EC2 EN1992-1-1:2004, EC0 EN1990-1-1:2002)
Design OK
Name of design object
BEAM-002
Concrete-Steel class
C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4)
Concrete cover (EC2 §4.4.1) [mm]
Reinforcing bar diameter [mm]
Cross section dimensions, width and height [m]
Effective flange width, slab thickness [m]
Cross section actions
Bending moment [kNm]
Shear force [kN]
Axial force [kN]
Beam span [m]

Support conditions and lengths are used for the design for shear between web and flanges for T sections, § 6.2.4.

12.4 One span beam under composite loading

Dimensioning of one span beam under composite loading. The beam cross section can be rectangular, T section, or edge beam. The effective flange width is evaluated according to Eurocode 2 §5.3.2.1. The end support conditions of the beam may be specified as simply supported or fixed. The loading is the superposition of uniformly and triangularly distributed loads, and concentrated loads. Full code check, according to Eurocode 2, is performed. The reinforcing bars are automatically placed in the reinforcing bar schedules.

The design actions are obtained by combination of permanent and variable actions as in Eurocode 0, EN 1990:2002 (**γG Gk +γQ Qk).**

The flexural reinforcement is computed according to Eurocode 2 § 6.1, in ultimate limit sate for bending. The shear reinforcement is computed according to Eurocode 2 § 6.2. The design in ultimate limit state of cracking is limited to the requirements of cracking control of Eurocode 2 §7.3, and requirements of slenderness according to Eurocode 2 §7.4. The reinforcing steel detailing and minimum requirements are according to Eurocode 2 §9.2.

You specify the desired diameter for reinforcement and the number of reinforcing bars and stirrup spacing is obtained. You may check to use specific diameter for reinforcing bars, or the program optimises the reinforcement around the desired diameter. The reinforcement is automatically placed in the reinforcing bar schedules.

The default diameter for longitudinal reinforcement and the diameter for stirrup reinforcement are defined in [Parameters/Reinforced Concrete/Beams].

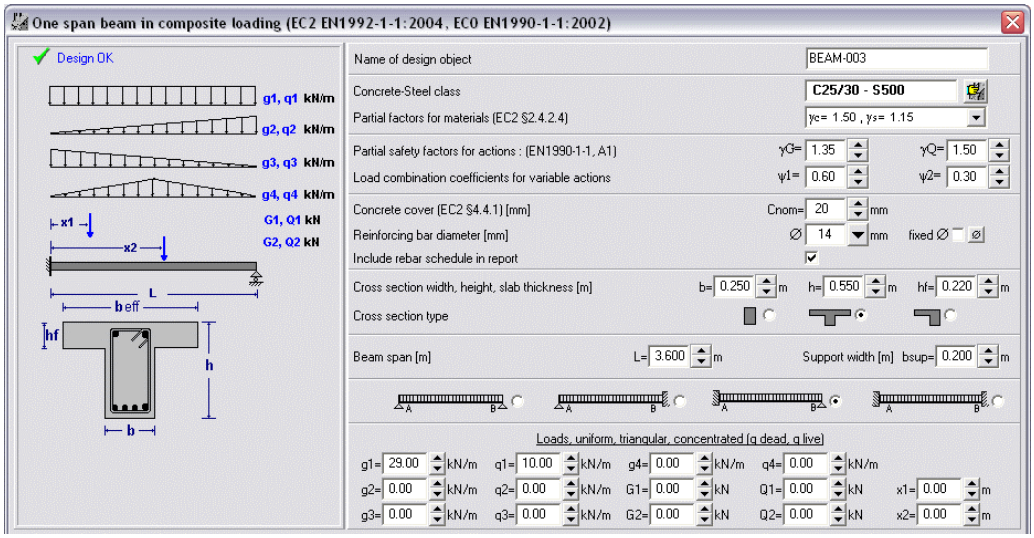

12.4.1 Beam span

The span L of the beam in meters (m). If you give support width>0 then for the fixed supports the negative moments are computed at support face, which basically means that the free span of the beam is L-bsup/2 for a beam fixed at one end and L-bsup for a beam fixed at both ends. For a simply supported beam the free span is L.

12.4.2 Loads

The values for the loads are according to the diagram on the left. The distributed loads are in [kN/m] and the concentrated loads in [kN]. The distance of the concentrated loads is measured always from the left beam support in meters (m). The design actions are obtained by combination of permanent and variable actions as in Eurocode 0, 1990:2002 (**γG Gk +γQ Qk**).

12.5 Multiple span continuous beams

Design of continuous beams up to 8 spans with optional end cantilevers, under uniform loading on the spans. The load can have dead and live components. The beam cross section can be rectangular, T section, or edge beam. The effective flange width is evaluated according to Eurocode 2 §5.3.2.1. The lengths, the cross section data and the loading may be specified for every span. Cantilevers at the left and right end may be specified. Full code check, according to Eurocode 2, is performed. A detailed report with all the computations, graphs, and code references is produced. The reinforcing bars are automatically placed in the reinforcing bar schedules
The design actions are obtained with combination of permanent and variable actions as in Eurocode 0 1990:2002 (**γG Gk +γQ Qk**). The static solution is performed with finite element analysis taking into account the most unfavourable live load placing on the spans to obtain the maximum or minimum design values for bending moments and shear forces.

The support moments are computed at the faces of the supports. The design moments may be redistributed (Eurocode 2 §5.5), if the specified percentage of moment redistribution is >0. In the moment redistribution the support moments, calculated using linear elastic analysis, are reduced by the ratio of moment redistribution, with a corresponding increase of the span moments, such as the resulting moments remain in equilibrium.
The flexural reinforcement is computed according to Eurocode 2 § 6.1, in ultimate limit sate for bending . The shear reinforcement is computed according to Eurocode 2 § 6.2. The design in ultimate limit state of cracking is limited to the requirements of cracking control of Eurocode 2, §7.3, and requirements of slenderness according to Eurocode 2 §7.4. The reinforcing steel detailing and minimum requirements for reinforcement, is according to Eurocode 2 §9.2.

The number of reinforcing bars and stirrup spacing is computed. You may check to use specific reinforcement diameter or the program optimises the reinforcement around the desired diameter. The reinforcing bars are automatically placed in the reinforcing bar schedules.

The default diameter for longitudinal reinforcement and the diameter for stirrup reinforcement are defined in [Parameters/Reinforced Concrete/Beams].

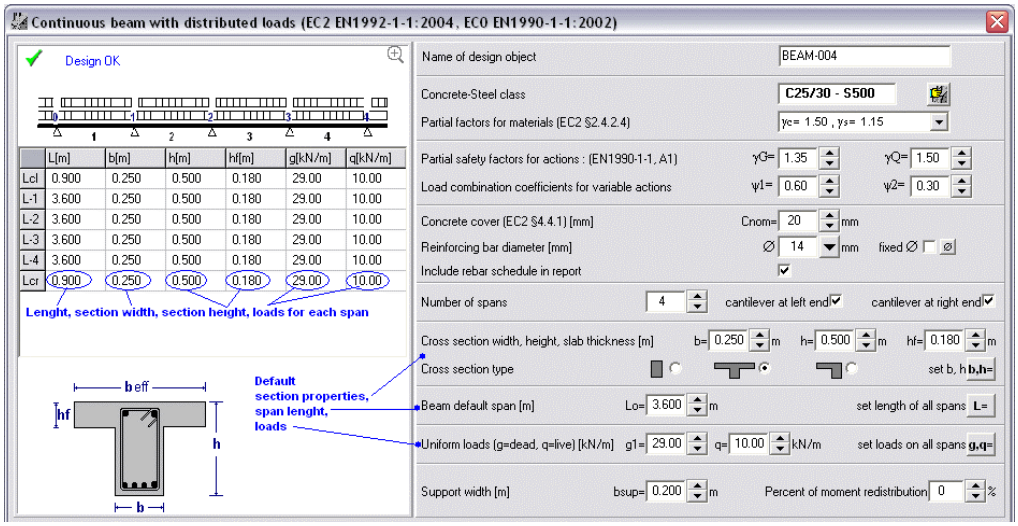
Continuous beam with distributed loads (EC2 EN1992-1-1:2004, EC0 EN1990-1-1:2002)
Design OK
Name of design object
BEAM-004
Concrete-Steel class
C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4)
γc= 1.50 , γs= 1.15
Partial safety factors for actions : (EN1990-1-1, A1)
Load combination coefficients for variable actions
Concrete cover (EC2 §4.4.1) [mm]
Reinforcing bar diameter [mm]
Include rebar schedule in report
Number of spans
cantilever at left end
cantilever at right end
Cross section width, height, slab thickness [m]
Cross section type
Beam default span [m]
Uniform loads (g=dead, q=live) [kN/m]
Support width [m]
Percent of moment redistribution
Lenght, section width, section height, loads for each span
Default section properties, span lenght, loads

12.5.1 Beam cross-section

The cross section data are for the default cross section. By clicking at **h=** the default cross section data are set in all the spans. From the table at the left window under the beam sketch you may specify the cross section data for every span.

12.5.2 Span length

Beam length Lo in meters [m], is the default span length. By clicking at **L=** the span length is set to the default value at all the spans. At the cantilevers (if they exist) the span length is set to (1/4) of the default value. To set the span length for each span click and edit the corresponding cell at the left window under the beam sketch.

12.5.3 Number of spans

You specify the number of spans of the continuous beam. By checking cantilever at left or cantilever at right, you specify the existence of cantilevers at the left or the right end.

The spans are automatically created with the default length Lo, the default thickness ho, and the default loads g and q. From the left window you may change these values for span length L, thickness h, and loads g and q.

12.5.4 Loads



Default loads in [kN/m], g1 for the dead load on the beam, and q for the live load on the beam. From the left window under the beam sketch, you may change these default values for every span. (The total dead load is g=self weight + g1, the self weight is computed by the program)

By clicking at **g,q=** you set the values for the loads at all the spans to the default values.

The design actions are obtained with combination of permanent and variable actions as in Eurocode 0 1990:2002 (**γG Gk +γQ Qk**).

12.5.5 Percent of moment redistribution



The support moments, in continuous beams, calculated using linear elastic analysis, are reduced by the ratio of **moment redistribution**, with a corresponding increase of the span moments, such as the resulting moments remain in equilibrium (Eurocode 2, §5.5). The ratio of redistributed moment, to the moment before redistribution, is defined by the user in percent (%).



12.5.6 Support width

Mean support width in meters (m). The design support moments, for the computation of the reinforcement over the supports, are computed at the support faces at a distance b=bsup/2 from the axis of the support.

12.6 Beam section subjected to torsion

Design of a rectangular or T shape beam section, under combined torsion, shear and bending. The design is according to Eurocode 2, §6.3.2,
Trd,max is the design torsional resistance moment Eurocode 2 §6.3.2.

Vrd,max is the design resistance shear relating to a strut inclined at an angle 45°, Eurocode 2 §6.2.3.,

$$\left(\frac{T_{Ed}}{T_{Rd,max}}\right)+\left(\frac{V_{Ed}}{V_{Rd,max}}\right)\leq 1$$

The calculation for necessary stirrups in torsion and shear are made separately.

You specify the desired diameter for reinforcement and the number of reinforcing bars and stirrup spacing is obtained. You may check to use specific diameter for reinforcing bars, or live the program to optimise the reinforcement around the desired diameter. The default diameter for longitudinal reinforcement and the diameter for stirrup reinforcement is defined in [Parameters/Reinforced Concrete/Beams].

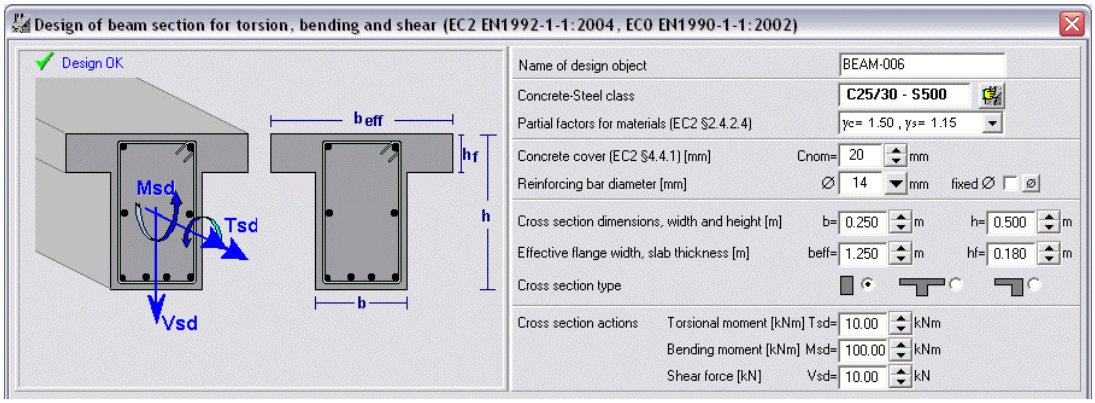

12.7 Moment capacity of beam section

Evaluation of the ultimate moment capacity of rectangular or T shape beam section, with a given reinforcement.

The ultimate bending capacity of the cross section is computed by numerical integration of the internal forces acting on the section. These internal forces are the forces due to compression of the concrete, and due to tension and compression of the steel at the positions of the reinforcing bars.

The following assumptions are used :

- Plain sections remain plane.
- Parabolic stress-strain distribution diagram for the compressive stresses of concrete.
- Elasto-plastic stress-strain relationship for the steel.
- Tensile stresses of concrete are ignored.

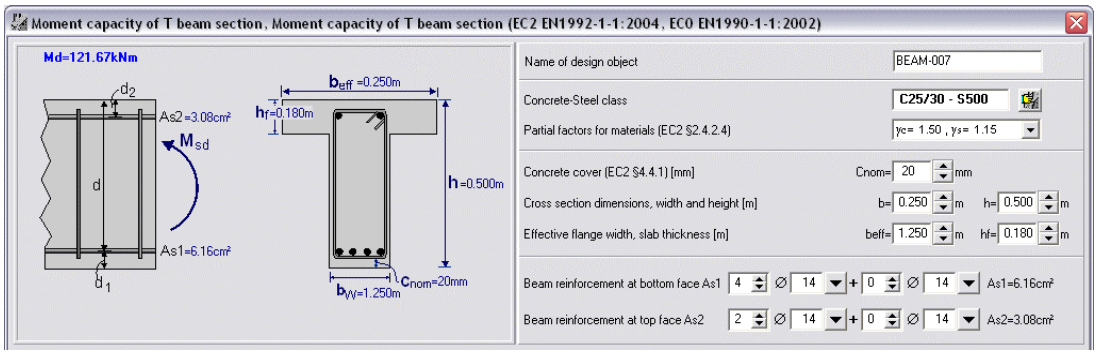

12.8 Beam section strengthened with FRP jacket (moment capacity)

Evaluation of the ultimate moment capacity of rectangular or T shape beam section, with a given reinforcement and strengthened with a jacket from Fibre Reinforced Polymer (FRP) material.

For the cross section you specify:

- The concrete and steel class.
- The dimensions and the reinforcement.
- The characteristic properties (Modulus of Elasticity, Tensile strength) of the FRP material
- The dimensions (width, and thickness) of the jacket from FRP material
- The bending moment under service load without FRP jacket.

By clicking at you select FRP material from the table of FRP materials. You can edit and update the table of FRP materials from the menu [Parameters/FRP materials].

The ultimate bending capacity of the cross section is computed, by numerical integration of the internal forces acting on the section. These internal forces are the forces due to compression of the concrete, due to tension and compression of the steel at the positions of the reinforcing bars, and due to compression and tension of the FRP jacket. The initial deformations under service load, (bending moment without FRP jacket) is taken into account in the evaluation of stresses in the FRP jacket.

The following assumptions are used:

- Plain sections remain plane.
- Parabolic stress-strain distribution diagram for the compressive stresses of concrete.
- Elasto-plastic stress-strain relationship for the steel.
- Tensile stresses of concrete are ignored.
- Linear stress-strain relationship for the FRP material.

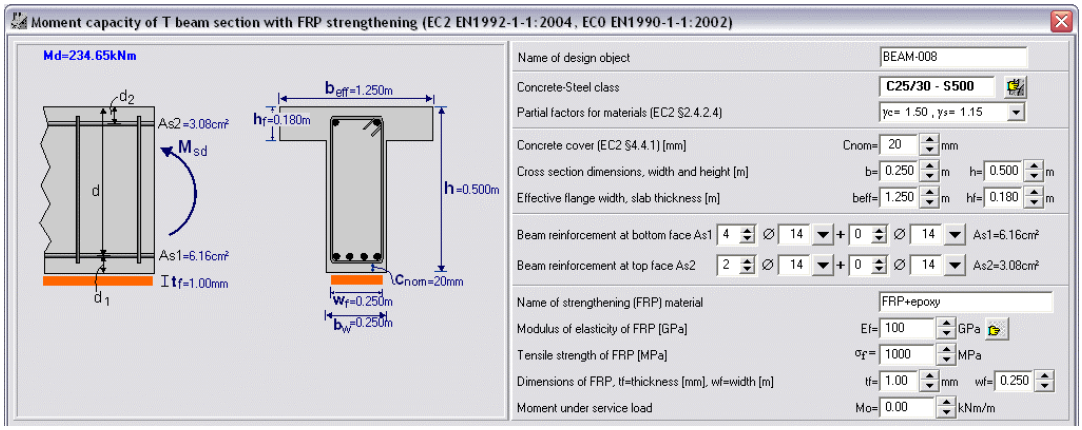
Moment capacity of T beam section with FRP strengthening (EC2 EN1992-1-1:2004, EC0 EN1990-1-1:2002)
Md=234.65kNm
Name of design object
BEAM-008
Concrete-Steel class
C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4)
Concrete cover (EC2 §4.4.1) [mm]
Cross section dimensions, width and height [m]
Effective flange width, slab thickness [m]
Beam reinforcement at bottom face As1
Beam reinforcement at top face As2
Name of strengthening (FRP) material
FRP+epoxy
Modulus of elasticity of FRP [GPa]
Tensile strength of FRP [MPa]
Dimensions of FRP, tf=thickness [mm], wf=width [m]
Moment under service load

13. Columns

Columns of rectangular or circular cross-section in compression with biaxial bending. The dimensioning is according to biaxial bending interaction (P-Mx-My) diagrams, which are obtained using a numerical integration. For rectangular columns you select the reinforcement arrangement (reinforcement at the corners or around the perimeter).

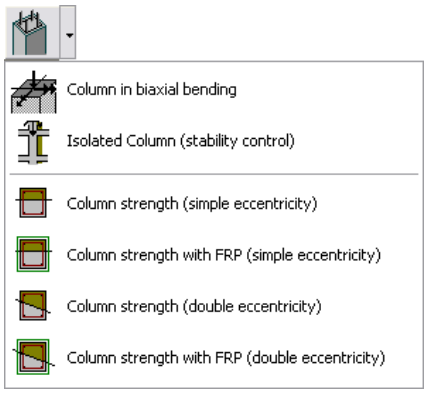
Column in biaxial bending
Isolated Column (stability control)
Column strength (simple eccentricity)
Column strength with FRP (simple eccentricity)
Column strength (double eccentricity)
Column strength with FRP (double eccentricity)

Slender columns in double bending. The design is according to Eurocode 2 §5.8. The slenderness effects and second order effects are considered in the design. For the end restrain conditions you specify the end support conditions in both x and y directions (fixed, pin or free end). In the case of column, which is part of a building frame, elastically restrained ends can be specified. The applied loads are axial loads and bending moments in x-x and y-y directions at the top and bottom.

Section capacity of rectangular or circular columns subjected to compression and uniaxial or biaxial bending moments. The ultimate capacity of a column cross-section, with given dimensions and reinforcement, is computed by numerical integration of the forces acting on the cross-section at equilibrium. The internal forces are the forces of the concrete (parabolic compressive stress-strain diagram), and the forces (elasto-plastic

stress-strain diagram) of the steel. The results are tabulated values and graphs for the failure surface, Pn-Mn values for the uniaxial bending, and Pn-Mx-My for the biaxial bending.

Section capacity of rectangular or circular columns with FRP (fiber reinforced polymer) **jacket subjected to compression and uniaxial or biaxial bending moments**. The ultimate capacity of a column cross section, with given dimensions, reinforcement and FRP jacket, is computed by numerical integration of the forces acting on the cross-section at equilibrium. The internal forces are the forces of the concrete (parabolic compressive stress-strain diagram), the forces of the steel (elasto-plastic stress-strain diagram), and the forces of the FRP jacket (linear stress-strain diagram). The results are tabulated values and graphs for the failure surface, Pn-Mn values for the uniaxial bending, and Pn-Mx-My for the biaxial bending.

13.1 Design of column section in double bending

Design of column of rectangular or circular cross section in biaxial bending with compression. The dimensioning is done using a numerical integration of the concrete and steel forces over the column cross section. In addition approximate design values are obtained, using biaxial bending interaction (P-Mx-My) diagrams for concrete cover column side/10,*Kordina K, Bemessungshilfsmittel zu EC 2 Teil 1, Planung von Stahlbeton, Berlin, Beuth, 1992*.

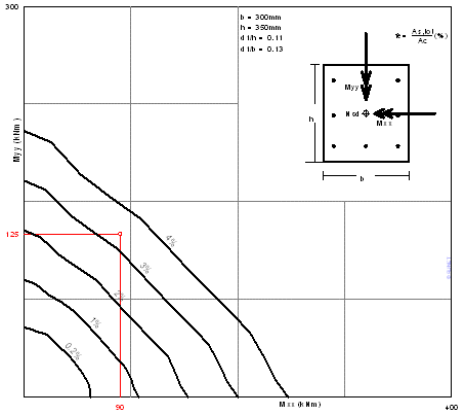

For the numerical integration accuracy you give the number N of subdivisions per column side. The numerical integration is performed with a subdivision of the cross section in NxN elements. A value of N=10 seems to give adequate accuracy. The dimensioning is done using the biaxial bending interaction (P-Mx-My) diagrams. The slenderness effect or secondary moments due lateral deflection under load are not taken into account.

The axial force in [kN], positive for compression and the bending moments in [kNm]. You specify if the reinforcement is placed in the four corners of the cross section or if it is distributed around the perimeter of the section. The position of the reinforcement plays roll in the evaluation of the equilibrium of forces of the cross section.

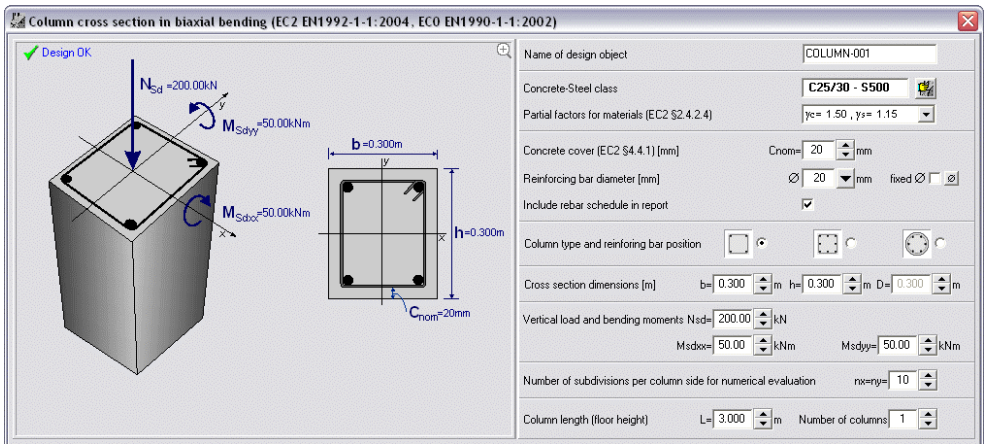
Column cross section in biaxial bending (EC2 EN1992-1-1:2004, EC0 EN1990-1-1:2002)
Design OK
N_Sd =200.00kN
M_Sdyy=50.00kNm
M_Sdxx=50.00kNm
b=0.300m
h=0.300m
C_nom=20mm
Name of design object
COLUMN-001
Concrete-Steel class
C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4)
γc= 1.50 , γs= 1.15
Concrete cover (EC2 §4.4.1) [mm]
Cnom= 20 mm
Reinforcing bar diameter [mm]
20 mm fixed
Include rebar schedule in report
Column type and reinforing bar position
Cross section dimensions [m]
b= 0.300 m h= 0.300 m D= 0.300 m
Vertical load and bending moments Nsd= 200.00 kN
Msdxx= 50.00 kNm Msdyy= 50.00 kNm
Number of subdivisions per column side for numerical evaluation
nx=ny= 10
Column length (floor height)
L= 3.000 m Number of columns 1

The length and the number of columns are used for the rebar schedule.

13.2 Slender columns (second order effects)

Design of slender columns in double bending. The design is according to Eurocode 2, §5.8. The slenderness effect and second order effects are considered in the design.

Axial loads and bending moments in x-x and y-y directions, can be applied at the top and bottom of the column.

For the end restrain conditions you specify the end support conditions in both x and y directions (fixed, pin or free end). In case of column, which is part of a building frame, elastically restrained ends are assumed in non-sway structure. In this case select , and underneath specify the number of beams (n) at the column end in the x-x or y-y direction, and the beam dimensions (b=cross section width, h=cross section height, L=beam length). You specify also the dimensions (b=cross section width, h=cross section height, L=column length), for the columns above and below. The rigidity of restraint at the column ends is evaluated according to Eurocode 2, §5.8.

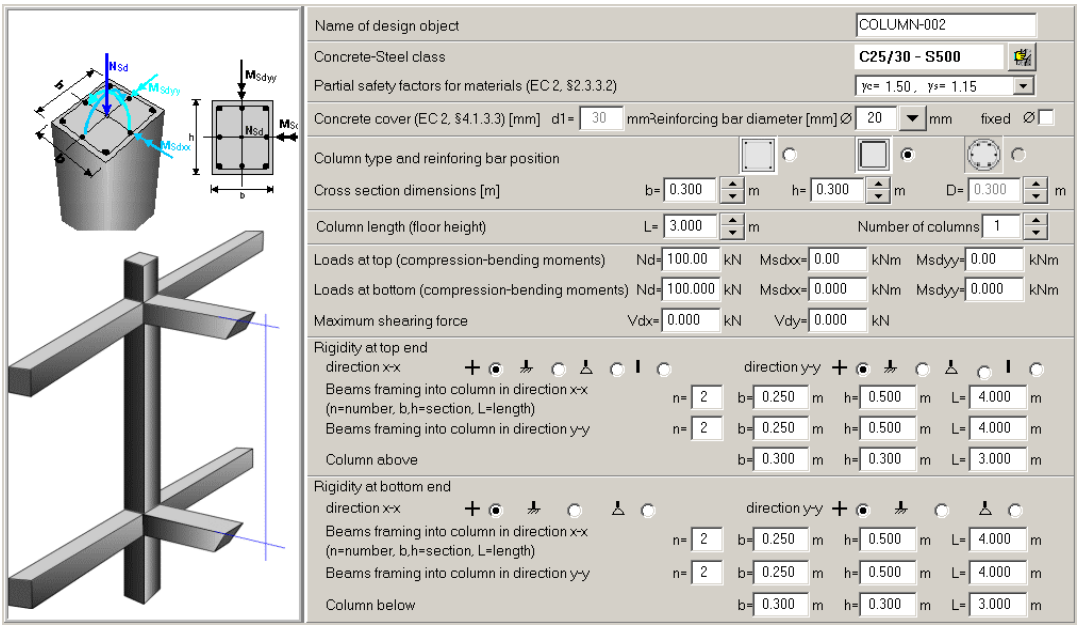
Name of design object
COLUMN-002
Concrete-Steel class
C25/30 - S500
Partial safety factors for materials (EC 2, §2.3.3.2)
γc= 1.50 , γs= 1.15
Concrete cover (EC 2, §4.1.3.3) [mm] d1= 30 mm²einforcing bar diameter [mm] Ø 20 mm fixed
Column type and reinforing bar position
Cross section dimensions [m] b= 0.300 m h= 0.300 m D= 0.300 m
Column length (floor height) L= 3.000 m Number of columns 1
Loads at top (compression-bending moments) Nd= 100.00 kN Msdxx= 0.00 kNm Msdyy= 0.00 kNm
Loads at bottom (compression-bending moments) Nd= 100.000 kN Msdxx= 0.000 kNm Msdyy= 0.000 kNm
Maximum shearing force Vdx= 0.000 kN Vdy= 0.000 kN
Rigidity at top end
direction x-x
direction y-y
Beams framing into column in direction x-x (n=number, b,h=section, L=length) n= 2 b= 0.250 m h= 0.500 m L= 4.000 m
Beams framing into column in direction y-y n= 2 b= 0.250 m h= 0.500 m L= 4.000 m
Column above b= 0.300 m h= 0.300 m L= 3.000 m
Rigidity at bottom end
direction x-x
direction y-y
Beams framing into column in direction x-x (n=number, b,h=section, L=length) n= 2 b= 0.250 m h= 0.500 m L= 4.000 m
Beams framing into column in direction y-y n= 2 b= 0.250 m h= 0.500 m L= 4.000 m
Column below b= 0.300 m h= 0.300 m L= 3.000 m

13.3 Column section capacity

Section capacity of rectangular or circular columns with given reinforcement, and subjected to axial loading with uniaxial or biaxial bending moments. The dimensions and the reinforcement of the columns are specified. The ultimate capacity of the cross section is computed, by numerical integration of the internal forces on the cross section at equilibrium. These internal forces are the forces due to compression of the concrete, and due to tension and compression of the steel at the positions of the reinforcing bars.

The following assumptions are used:
Plain sections remain plane.

- Parabolic stress-strain distribution diagram for the compressive stresses of concrete.
- Elasto-plastic stress-strain relationship for the steel.
- Tensile stresses of concrete are ignored.

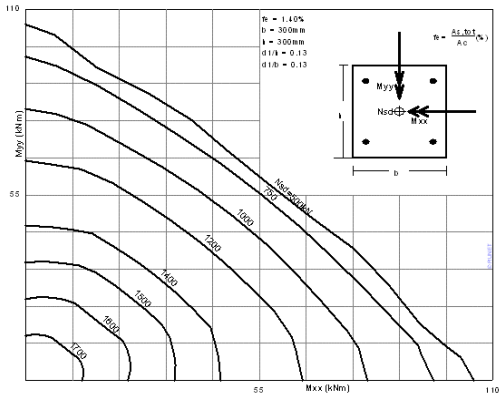

For the numerical integration accuracy you give the number N of subdivisions per column side. The numerical integration is performed with a subdivision of the cross section in NxN elements. A value of N=10 seems to give adequate accuracy.

The results are tabulated values and graphs for the failure surface, Pn-Mn values for the uniaxial loading and Pn-Mx-My for the biaxial bending.

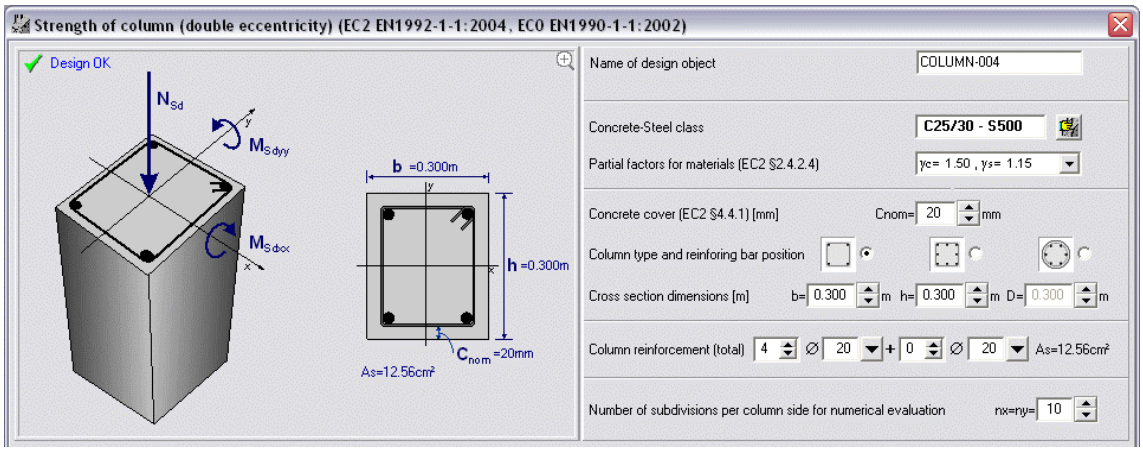
Strength of column (double eccentricity) (EC2 EN1992-1-1:2004, EC0 EN1990-1-1:2002)
Design OK
Name of design object
COLUMN-004
Concrete-Steel class
C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4)
γc= 1.50 , γs= 1.15
Concrete cover (EC2 §4.4.1) [mm]
Cnom= 20 mm
Column type and reinforing bar position
Cross section dimensions [m] b= 0.300 m h= 0.300 m D= 0.300 m
Column reinforcement (total) 4 Ø 20 + 0 Ø 20 As=12.56cm²
Number of subdivisions per column side for numerical evaluation nx=ny= 10
b =0.300m
h =0.300m
Cnom=20mm
As=12.56cm²

13.4 Column section strengthened with FRP jacket

Section capacity of rectangular or circular column strengthened with FRP (Fibre reinforced polymer) jacket, and subjected to compression with uniaxial or biaxial bending moments.

For the column cross section you specify:

- The concrete and steel class.
- The dimensions, concrete cover and the reinforcement.

The characteristic properties (Modulus of Elasticity, Tensile strength) of the FRP material

- The dimensions (width, and thickness) of the FRP jacket.
- The axial load under service load without FRP jacket.

The ultimate capacity of the cross section is computed, by numerical integration of the internal forces on the cross section at equilibrium. These internal forces are the forces due to compression of the concrete, due to tension and compression of the steel at the positions of the reinforcing bars, and due to compression and tension of the FRP jacket.

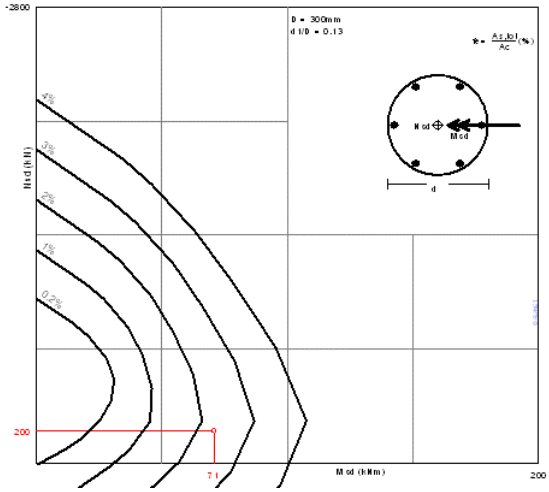

The following assumptions are used:

- Plain sections remain plane.
- Parabolic stress-strain distribution diagram for the compressive stresses of concrete.
- Elasto-plastic stress-strain relationship for the steel.
- Tensile stresses of concrete are ignored.
- Linear stress-strain relationship for the FRP material.

For the numerical integration accuracy you give the number N of subdivisions per column side. The numerical integration is performed with a subdivision of the cross section in NxN elements. A value of N=10 seems to give adequate accuracy. The results are tabulated values and graphs for the failure surface, Pn-Mn values for the uniaxial loading and Pn-Mx-My for the biaxial bending.

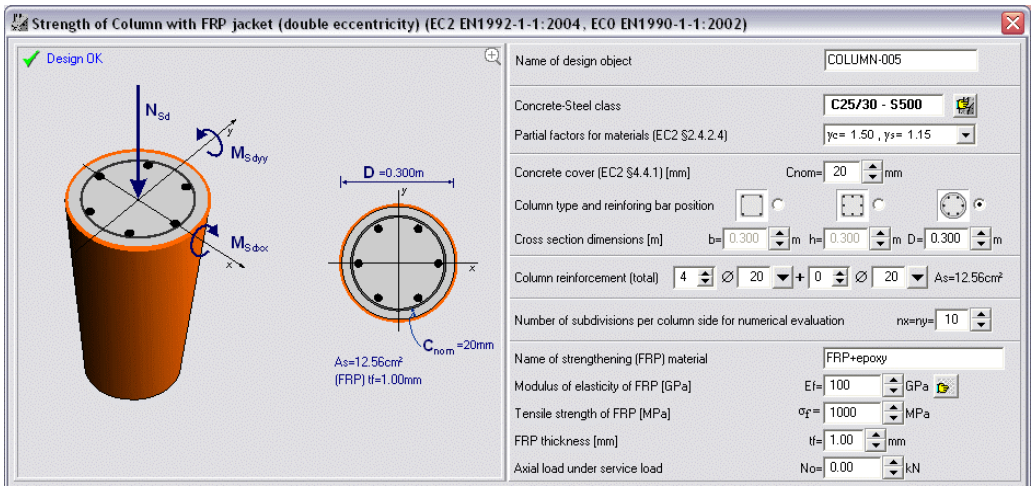

14. Spread footings

Design of square or rectangular spread footings, subject to vertical load and biaxial overturning moments. The footings can be flat or sloped, centric or eccentric.

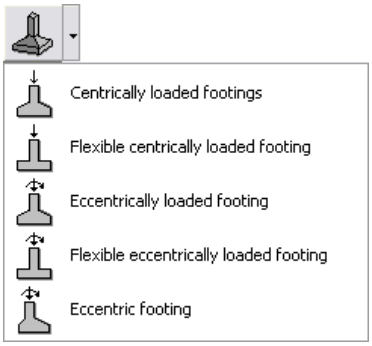

Dimensions. The footing dimensions you specify are: the length and the width of the footing, the thickness of footing and the size of column sides. In the case of eccentric footing the eccentricity of the column in respect to the footing center must be specified. All the dimensions are in meters.

Pre-dimensioning. After you give the loads by clicking at this button, you get a first estimate of the footing dimensions. In this predimensioning the dimensions that are checked, remain unchanged.

Loading. The loading is on the top of the footing. The vertical load, that you specify, does not include the self weight of the footing. In the case of centrically loaded footings the loading is the vertical dead and live load in [kN]. The vertical load is positive downwards. You can specify negative vertical loading (dead or live) if the load is upwards. In the case of eccentrically loaded footings in addition you supply the moments Mxx and Myy in [kNm] for the dead, the live and seismic components of the loading on the top of the footing.
The design load combinations are according to EN 1990:2002, and Eurocode 7,Annex A.

Loading-1 **γGxDead** + **γQxLive**,

Loading-2 Dead + ψ2xLive + Seismic x-x,

Loading-3 Dead + ψ2xLive + Seismic y-y

γG, and γQ are according to EN 1990:2002 and Eurocode 7,Annex A, for unfavourable and favourable permanent and variable actions for EQU, STR and GEO limit states

The design for earthquake loading is activated/deactivated from [Parameters/Design rules]

Soil properties.
You specify :

- the soil bearing capacity in [N/mm²] (GPa) when the geotechnical design is according to Eurocode 7.
- the soil bearing pressure in [N/mm²] (GPa) when the geotechnical design is with allowable stresses.

By clicking at you can select a soil from the table with soil properties.

From [Parameters/Soil properties] you can edit (change properties, or add new) the table with the soil properties.

Geotechnical design. The program determines the exact pressure distribution under the footing using numerical integration, even when only a part of the footing is in contact with the soil.

The geotechnical design can be performed:

According to Eurocode 7 §6.5.2. The bearing resistance of the footing Rd is greater than the design load Vd, Rd>Vd. The bearing resistance Rd=quxA'/γq, where qu is bearing capacity of soil and the A' is the effective design area of footing as is defined in Annex B of Eurocode 7. The partial factors for soil properties γM are used for the design values of geotechnical parameters according to Eurocode 7 Annex A. EQU, STR and GEO limit states.

According to allowable pressure theory. The maximum pressure under the footing, as calculated from the exact pressure distribution, is less than the soil bearing pressure qu.

From [Parameters/Design rules], you can choose to work with Eurocode 7 or allowable stresses for the geotechnical design.

Concrete design. The flexural reinforcement is computed according to Eurocode 2 § 6.1, in ultimate limit sate for bending. The shear strength is checked according to Eurocode 2 §6.2 2. The punching shear is checked according to Eurocode 2 §6.4.3. You specify the desired diameter for flexural reinforcement, and the spacing and number of reinforcing bars is obtained. You may check to use specific reinforcement diameter or the program optimise the reinforcement around the desired diameter. The reinforcing bars are automatically placed in the reinforcing bar schedules. In [Parameters/Parameters for reinforced concrete/Footings] you specify the limits for reinforcing bar diameter and reinforcement spacing that are applied in the design.

In [Parameters/Parameters for reinforced concrete/Footings] you can specify if you want for the min and maximum reinforcing steel areas to apply the requirements for plates §9.3.1. Eurocode 2 is not clear on this subject.

Design parameters. From [Parameters/Parameters of footings] you can adjust the various design code factors, as partial safety factors, allowable limits, safety factors, eccentricity limits with or without seismic loading, minimum rebar requirements, seismic coefficients etc..
From [Parameters/Soil properties] you can edit and update the data base with soil materials which are used in the program.

Report. The report shows in detail all the calculations of soil pressures, load combinations, internal force evaluation, stability controls and strength design. The report has references to relative paragraphs of the Eurocodes, and sketches aside of the text, which explain the notation, and show the stress distributions, and rebar position.

14.1 Dimensions and loading

centrically loaded footing

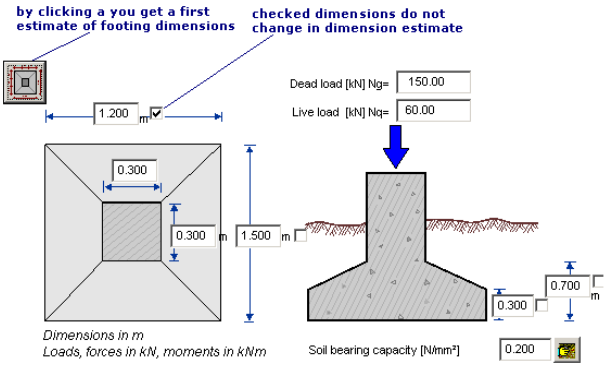

eccentrically loaded footing

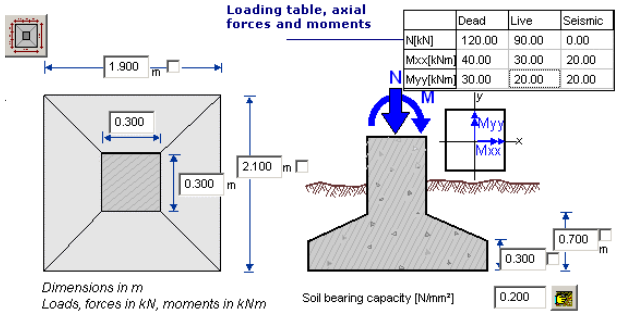

14.2 Soil properties



You specify :
the soil bearing capacity in [N/mm²] (GPa) when the geotechnical design is according to Eurocode 7.
the soil bearing pressure in [N/mm²] (GPa) when the geotechnical design is with allowable stresses.

From [Parameters/Design rules] you can choose to work either with Eurocode 7 or with allowable stresses, for the geotechnical design.

By clicking at you can select a soil from the table with soil properties.

From [Parameters/Soil properties] you can edit (change properties, or add new) the table with the soil properties.

The foundation depth can be specified so the extra weight of the soil above the footing is taken into the account in the design. This is very useful in the case of vertical upwards loading of the footing.

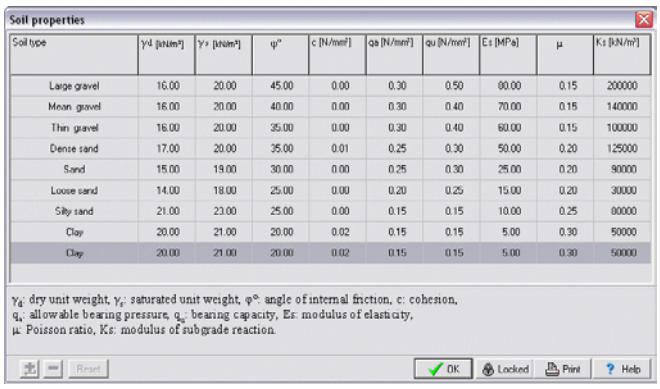

The foundation depth can be specified so the extra weight of the soil above the footing is taken into the account in the design. This is very useful in the case of vertical upwards loading of the footing.

14.3 Spread footings, centrically loaded

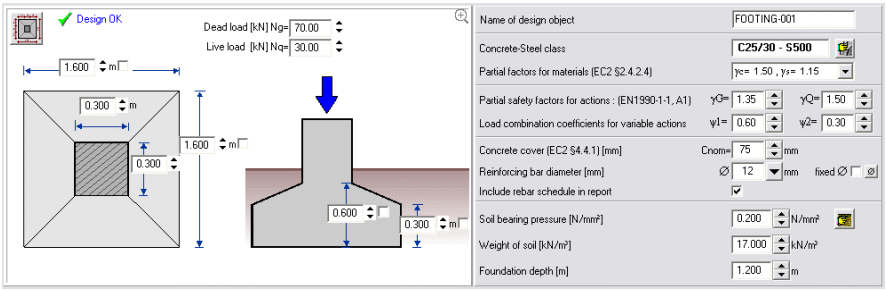
Design OK
Dead load [kN] Ng= 70.00
Live load [kN] Ng= 30.00
1.600 m
0.300 m
0.300
1.600 m
0.600
0.300 m
Name of design object FOOTING-001
Concrete-Steel class C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4) γc= 1.50 , γs= 1.15
Partial safety factors for actions : (EN1990-1-1, A1) γG= 1.35 γQ= 1.50
Load combination coefficients for variable actions ψ1= 0.60 ψ2= 0.30
Concrete cover (EC2 §4.4.1) [mm] Cnom= 75 mm
Reinforcing bar diameter [mm] Ø 12 mm fixed Ø
Include rebar schedule in report
Soil bearing pressure [N/mm²] 0.200 N/mm²
Weight of soil [kN/m³] 17.000 kN/m³
Foundation depth [m] 1.200 m

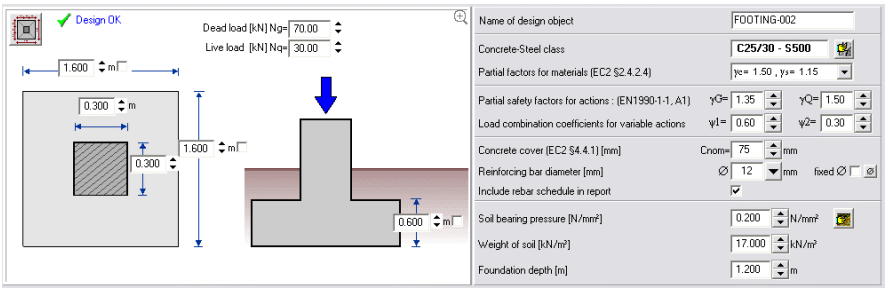
Design OK
Dead load [kN] Ng= 70.00
Live load [kN] Ng= 30.00
1.600 m
0.300 m
0.300
1.600 m
0.600 m
Name of design object FOOTING-002
Concrete-Steel class C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4) γc= 1.50 , γs= 1.15
Partial safety factors for actions : (EN1990-1-1, A1) γG= 1.35 γQ= 1.50
Load combination coefficients for variable actions ψ1= 0.60 ψ2= 0.30
Concrete cover (EC2 §4.4.1) [mm] Cnom= 75 mm
Reinforcing bar diameter [mm] Ø 12 mm fixed Ø
Include rebar schedule in report
Soil bearing pressure [N/mm²] 0.200 N/mm²
Weight of soil [kN/m³] 17.000 kN/m³
Foundation depth [m] 1.200 m

14.4 Spread footings eccentrically loaded

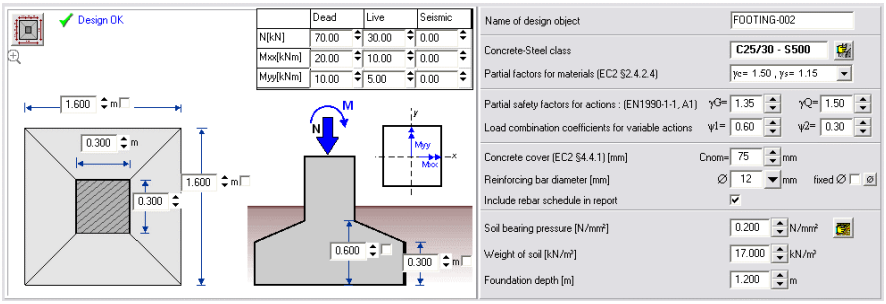
Design OK
Dead Live Seismic
N[kN] 70.00 30.00 0.00
Mxx[kNm] 20.00 10.00 0.00
Myy[kNm] 10.00 5.00 0.00
1.600 m
0.300 m
0.300
1.600 m
M
N
Myy
Mxx
0.600
0.300 m
Name of design object FOOTING-002
Concrete-Steel class C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4) γc= 1.50 , γs= 1.15
Partial safety factors for actions : (EN1990-1-1, A1) γG= 1.35 γQ= 1.50
Load combination coefficients for variable actions ψ1= 0.60 ψ2= 0.30
Concrete cover (EC2 §4.4.1) [mm] Cnom= 75 mm
Reinforcing bar diameter [mm] Ø 12 mm fixed Ø
Include rebar schedule in report
Soil bearing pressure [N/mm²] 0.200 N/mm²
Weight of soil [kN/m³] 17.000 kN/m³
Foundation depth [m] 1.200 m

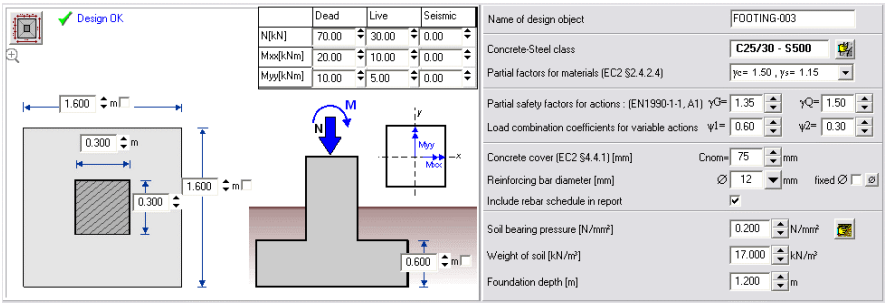
Design OK
Dead Live Seismic
N[kN] 70.00 30.00 0.00
Mxx[kNm] 20.00 10.00 0.00
Myy[kNm] 10.00 5.00 0.00
1.600 m
0.300 m
0.300
1.600 m
M
N
Myy
Mxx
0.600 m
Name of design object FOOTING-003
Concrete-Steel class C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4) γc= 1.50 , γs= 1.15
Partial safety factors for actions : (EN1990-1-1, A1) γG= 1.35 γQ= 1.50
Load combination coefficients for variable actions ψ1= 0.60 ψ2= 0.30
Concrete cover (EC2 §4.4.1) [mm] Cnom= 75 mm
Reinforcing bar diameter [mm] Ø 12 mm fixed Ø
Include rebar schedule in report
Soil bearing pressure [N/mm²] 0.200 N/mm²
Weight of soil [kN/m³] 17.000 kN/m³
Foundation depth [m] 1.200 m

14.5 Spread footings, eccentric (unsymmetrical) footing

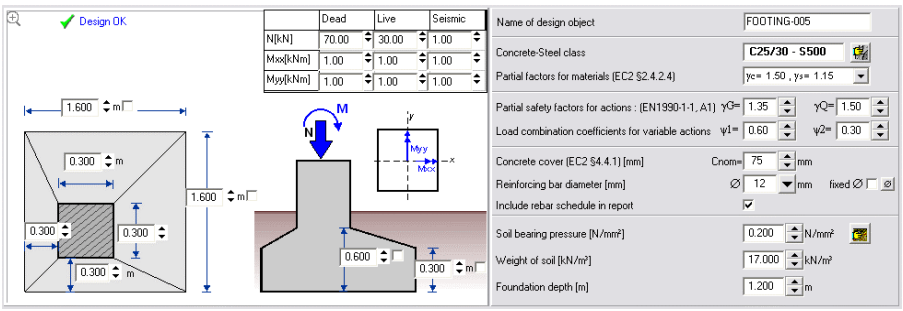
Design OK
Dead Live Seismic
N[kN] 70.00 30.00 1.00
Mxx[kNm] 1.00 1.00 1.00
Myy[kNm] 1.00 1.00 1.00
1.600 m
0.300 m
0.300
0.300
0.300 m
1.600 m
M
N
Myy
Mxx
0.600
0.300 m
Name of design object FOOTING-005
Concrete-Steel class C25/30 - S500
Partial factors for materials (EC2 §2.4.2.4) γc= 1.50 , γs= 1.15
Partial safety factors for actions : (EN1990-1-1, A1) γG= 1.35 γQ= 1.50
Load combination coefficients for variable actions ψ1= 0.60 ψ2= 0.30
Concrete cover (EC2 §4.4.1) [mm] Cnom= 75 mm
Reinforcing bar diameter [mm] Ø 12 mm fixed Ø
Include rebar schedule in report
Soil bearing pressure [N/mm²] 0.200 N/mm²
Weight of soil [kN/m³] 17.000 kN/m³
Foundation depth [m] 1.200 m

15. Retaining walls

Basic types of retaining walls, which you can design with the program are:
Gravity walls. Their stability depends entirely upon the weight of the masonry and any soil resting on the wall. Gravity walls must have sufficient thickness to resist the forces upon them without developing tensile stresses. Four types of gravity walls (backwards inclined or not), which cover most of the gravity wall shapes encountered in practice, are included in the program.
Cantilever walls. They consist of a steam on a base slab, both fully reinforced to resist the bending moments and shear forces which are subjected. Major part for their stability is the weight of the soil acting on the heel of the wall, and the large dimensions of the basement. Two types of cantilever walls are included in the program. One with short heel and the other with large heel.

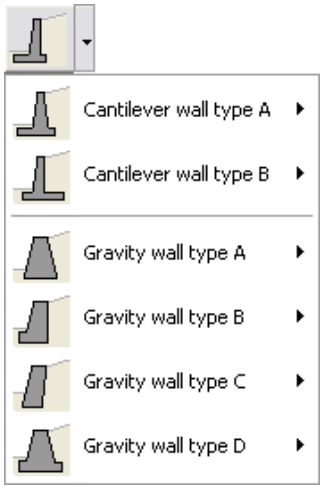
Cantilever wall type A
Cantilever wall type B
Gravity wall type A
Gravity wall type B
Gravity wall type C
Gravity wall type D

Dimensions and materials. For each type of wall the required input data, wall dimensions, backfill slope, wall material properties, backfill soil properties, foundation soil properties, are shown graphically at the corresponding places of the wall section. You can specify up to two different soil layers of backfill materials, each one with different properties, and you can specify if one or both of these soil layers are under the water table. A different soil layer can be specified in the front of the wall. Surcharge load with dead or live components, can be applied on the free surface of the backfill. On the top of the wall concentrated line load with dead or live components may be applied. This is useful in the design of bridge abutments. The properties of the soils are defined in [Parameters/Soil properties]

Earth forces. The computation of the active and passive earth forces is done using Coulomb's or Rankine's theory. For gravity walls and for cantilever walls without, or with very small back heel, the active earth pressure is computed at the back face of the wall using Coulomb's theory. For cantilever walls with back heel the active earth pressure is computed at a vertical passing from the end of the heel using Rankine's theory. The additional seismic forces, due to earth pressure, are computed using the theory by Mononobe-Okabe. (Eurocode 8-Part 5).

Stability controls, are performed based either on Ultimate Limit State Design according to Eurocode 7, Annex A for EQU, STR and GEO limit states or on Working Stress Design method. The user selects the method of analysis. The partial safety factors and load combination factors have values as defined in Eurocode 7 Annex A for EQU, STR and GEO limit states, but they can be adjusted by the user from [Parameters\Retaining walls]. In the case of working stress design method, the safety factors for overturning and sliding, (default values 2.00 and 1.50), can be defined by the user. The safety factors may have different values in seismic loading. The participation of passive earth force is taken into account as defined in Eurocode 7. In the case of working stress design method, and in the seismic analysis, the effect of passive earth force is taken into account by a factor, which can be defined by the user.

Strength design.
The design of gravity type walls from masonry or concrete is based either on Ultimate Limit State Design according to Eurocode 6, or on Working Stress Design method. The properties of the wall materials are defined in [Parameters/Parameters of retaining walls].
The design of cantilever type walls is based on Ultimate Limit State Design of concrete according to Eurocode 2. The design checks are performed at each tenth of the stem height and for cantilever walls the reinforcement of the stem is optimised. The reinforcing bars are automatically placed in the reinforcing bar schedules.

Seismic design. The seismic forces due to earth pressure are computed using the theory by Mononobe-Okabe. (Eurocode 8, part-5). Additional seismic loads are horizontal and vertical seismic forces due to the mass of the structure according to Eurocode 8 part 5..

Design parameters. From [Parameters/Parameters of retaining walls], and [Parameters/Parameters for reinforced concrete/Retaining walls], you can adjust the various code parameters, as:

- partial safety factors
- allowable stresses limits
- safety factors (overturning and sliding)
- participation coefficients for passive earth force with or without seismic loading
- eccentricity limits with or without seismic loading
- minimum rebar requirements
- seismic coefficients.

From [Parameters/Soil properties] the material properties for the soil types included in the program can be defined.

Report. The report is showing in detail all the calculations of earth forces, seismic forces load combinations, internal force evaluation, stability controls and strength design. It shows detail rebar design. The report shows references to relative paragraphs of the Eurocodes, and includes with the text sketches which explain the notation, show the stress distributions and rebar position.

15.1 Earth pressure

The computation of the passive and active earth forces is done using Coulomb's theory. For gravity walls and for cantilever walls with small back heel (Type A) the active earth pressure is computed at the back face of the wall using Coulomb's theory. For cantilever walls with back heel (Type B) the active earth pressure is computed at a vertical surface at the end of the heel, (see drawings below) using Rankine's theory.. The additional seismic forces, due to earth pressure, are computed using the theory by Mononobe-Okabe (Eurocode 8, Part 5, Annex E)..

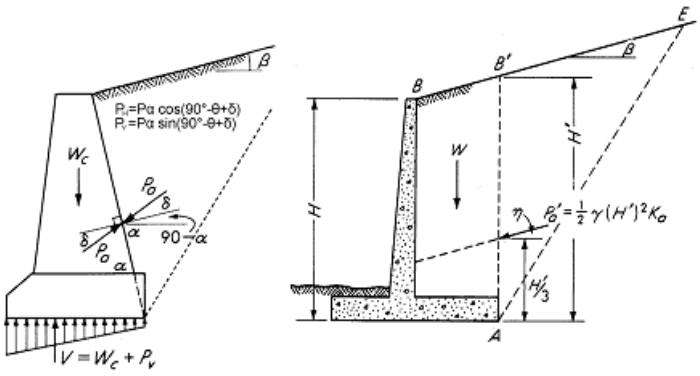

15.2 Lateral earth pressure

Active earth pressure is the force which is developed on some surface by a granular material, when the latter moves over a very small distance away from the granular material..

Passive earth pressure is the resultant pressure developed by a granular material against some surface, when the latter shifts over a small distance towards the material.

The basic assumptions for lateral earth-pressure, using a simplified wedge theory are set by Coulomb (1736-1806).

Additional seismic forces due to earth pressure according to theory by Mononobe-Okabe [ref], (Eurocode 8, part 5, annex E).

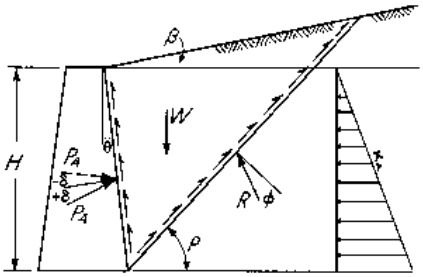

active earth pressure $P_A = \frac{\gamma H^2}{2} K_A$

$$K_A = \frac{\cos^2(\varphi - \theta)}{\cos^2\theta \cos(\theta+\delta)\left[1+\sqrt{\frac{\sin(\varphi+\delta)\sin(\varphi-\beta)}{\cos(\theta+\delta)\cos(\theta-\beta)}}\right]^2}$$

passive earth pressure $P_p = \frac{\gamma H^2}{2} K_p$

$$K_p = \frac{\cos^2(\varphi + \theta)}{\cos^2\theta \cos(\theta-\delta)\left[1-\sqrt{\frac{\sin(\varphi+\delta)\sin(\varphi+\beta)}{\cos(\theta-\delta)\cos(\theta-\beta)}}\right]^2}$$

φ angle of internal friction of soil
δ angle of wall friction

15.3 Dimensions

Give the basic wall dimensions according to the drawing. Click at 

to drawing.

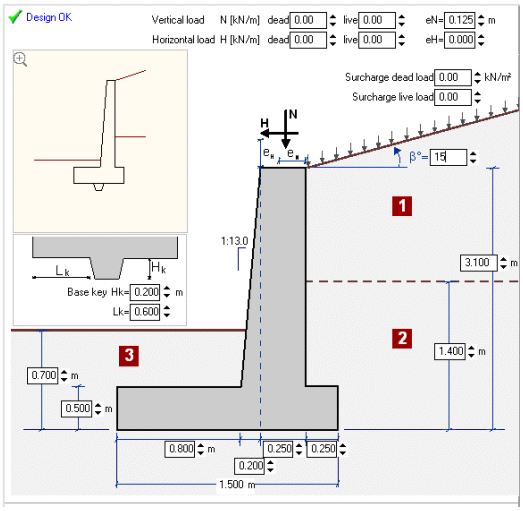

All the dimensions are in meters [m], and the angles (soil surface slope, wall batter) in degrees.

In order to give the batter of the front or the back face of the wall you have to check next to the angle to activate it, otherwise you can give the horizontal projection of the wall face and the batter is computed.

You can supply up to 3 soil layers, marked with numbers on the wall drawing. Two soil layers (1 and 2) are behind the wall and one soil layer (3) in front. The soil layers 2 and 3 exist if their heights are >0. If you have high water table level behind the wall, then use two soils. In that case the height of soil 2 is the height of the water table level, and in the soil properties of soil 2 checked to be under the water table level.

Together with the wall dimensions you give (if they exist) the surcharge distributed (dead and live) loads in [kN/m²]. The surcharge is assumed to act all over the top ground surface.

In addition you can specify, as in the case of bridge abutments, line load (vertical or horizontal, dead and live), acting on the top of the wall. To improve the wall behaviour in sliding, a base key can be specified. Specify the height of the key and its distance from the front toe.

15.4 Soil properties

15.4.1 Properties of soil layers for lateral earth forces

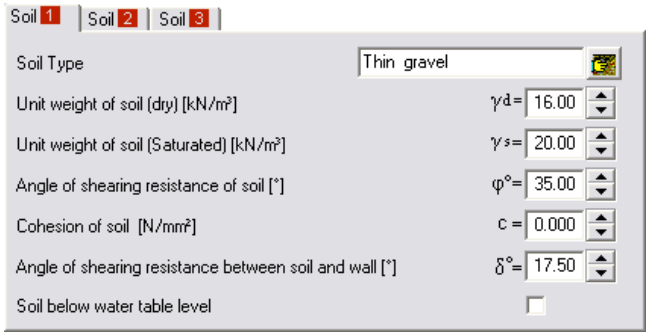

You specify the soil properties for the three soil layers as shown in the wall sketch. The two soil layers 1 and 2 are behind the wall, and soil layer 3 is in front of the wall. The soil layers 2 and 3 exist if their height is specified >0. If behind the wall you have high water table level then use two soil layers. In that case the height of soil layer 2 is the height of the water table level, and in the soil properties of soil layer 2 check [Soil below water table level]. By clicking at the table with soil types appears from which you can select a soil type and its properties are loaded.

The table of soil types can be edited (change values, add new soil types) from the menu [Parameters/Soil properties].

15.4.2 Foundation soil

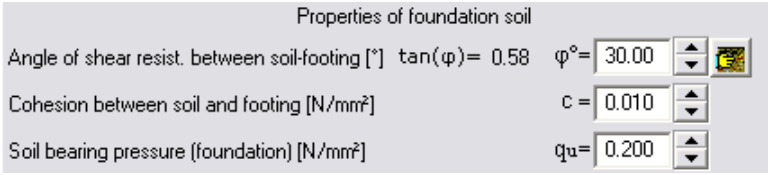
Properties of foundation soil
Angle of shear resist. between soil-footing [°] tan(φ)= 0.58
φ°= 30.00
Cohesion between soil and footing [N/mm²]
c = 0.010
Soil bearing pressure (foundation) [N/mm²]
qu= 0.200

The properties of the foundation soil are defined under the sketch of the wall. By clicking at the table with soil types appears and you can select a soil type. For the shear resistance between wall and soil, you specify the angle of friction in degrees, and the friction coefficient (shear resistance) is computed as the tangent of this angle. You specify the soil bearing capacity when the geotechnical design is according to Eurocode 7, or the allowable bearing pressure when the geotechnical design is with allowable stresses. You choose to work with Eurocode 7, or allowable stresses, for the geotechnical design, from the menu [Parameters/Design rules].

15.5 Stability design

The design of retaining walls is based either on Ultimate Strength Design method according to Eurocode 7, or on Working Stress Design method. Form [Parameters/Design rules] you select which of the two methods you want to use.

Stability checks using Ultimate Limit State Design, Eurocode 7, **§6.5 and §9.7**
Stability against overturning **Msd<Mrd**,
Msd are all the overturning moments (active earth pressure, seismic forces).
Mrd are the moments resisting overturning (self weight, backfill weight).
Overturning moments are computed in respect to the wall toe.
Stability against sliding **Hd<=Sd+Epd**
Hd is the horizontal component of the driving forces (active earth pressure, seismic forces).
Sd is the design shear resistance between the foundation and the soil. Sd=Vd tanϕd+A' Cu, where Vd is the design vertical load on the foundation surface, ϕd is the design shear resistance between foundation and soil. A' is the effective footing area (EC7 Annex B). Cu is the cohesion between foundation and soil.
Epd is the passive earth force.
Stability against soil bearing capacity failure **Vd<Rd**
Vd is the design load at the wall base (self weight, backfill weight, earth pressure, surcharge load).
Rd is the bearing capacity of the foundation Rd=A' qu. where A' is the effective footing area (EC7 Annex D), and qu is the soil bearing capacity (EC7 Annex C).
Load eccentricity in the foundation according to EC7 §6.5.4.

The actions are multiplied with the partial load factors given in Eurocode 7, Annex A. These factors are for unfavourable (overturning moments, sliding forces), or favourable (moments resisting overturning, foundation shear resistance, passive earth pressure) loading conditions. The load factors for favourable or unfavourable loadings can be set from [Parameters/Retaining Walls/Check wall stability with Eurocode 7]. The soil parameters are divided by the partial factors for soil parameters given in Eurocode 7 Annex A.

The limit states EQU (equilibrium), STR (structural) and GEO (geotechnical) are considered.

15.5.1 Stability checks using Working Stresses Design

Stability against overturning
(sum of moments resisting overturning)/(sum of overturning moments)>=Cf overturning.
The coefficients Cf for overturning is usually=1.50, but it can be set from [Parameters/Parameters of retaining walls/Check wall stability with safety factors]. In seismic design this coefficient is usually 1.00 and can be set from the menu [Parameters/Parameters of retaining walls/Seismic design].
Stability against sliding
(Sum of resisting forces)/(sum of driving forces)>=Cf sliding
The coefficients Cf for sliding is usually=1.50, but it can be set from [Parameters/Parameters of retaining walls/Check wall stability with safety factors]. In seismic design this coefficient is usually 1.00 and can be set from the menu [Parameters/Parameters of retaining walls/Seismic design]. From [Parameters/Parameters of retaining walls] you can set the participation coefficient of passive earth forces (coefficient which multiplies the passive earth force, default=0.50).
Soil allowable bearing capacity
The maximum soil pressure under the footing must not exceed the allowable soil bearing pressure.
Load eccentricity in the foundation.
The eccentricity limits are defined in [Parameters/Parameters of retaining walls/Check wall stability with safety factors], and for seismic design in [Parameters/Parameters of retaining walls/Seismic design].

15.6 Seismic loading

Check to perform or not the design for earthquake loading, and you specify the design ground acceleration ratio (Eurocode 8, part-1, §4.2.2). The seismic forces, due to active earth pressure, are computed according to Mononobe-Okabe (Eurocode 8, part-5, Annex E).

15.7 Gravity type retaining walls

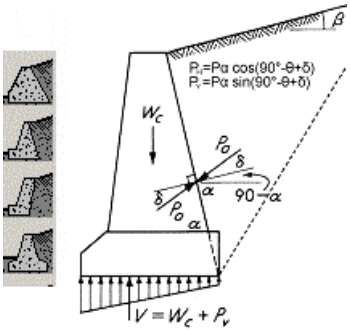

You can design four different types of gravity walls, backwards inclined or not. The computation of the passive and active earth forces is done using Coulomb's theory. The active earth pressure is computed at the back face of the wall. The design of gravity type walls from masonry or concrete is based either on Ultimate Limit State Design according to Eurocode 6, or on Working Stress Design method. The properties of the wall materials are defined in [Parameters/Parameters of retaining walls].

15.7.1 Design method

The design according to Eurocode 6 is based on the following checks:

Check for failure against normal vertical load **Nsd<Nrd**, (Eurocode 6 §4.4.1).

Nrd =design vertical load resistance, Nsd vertical design load.

Nrd=Φi,m t fk/γM

Φi,m is the capacity reduction factor, which takes into account the effects of slenderness and eccentricity of the loading at each wall section, according to Eurocode 6 §4.4.3.

t : is the wall thickness

fk : is the characteristic compressive strength of the masonry according to Eurocode 6, §3.6.2

γM : is the partial safety factor for the material and is obtained according to Eurocode 6 table 2.3.

Check for failure against shear, **Vsd<Vrd.** Eurocode 6, §4.5.3

Vrd=fvk t Lc/γM

Vsd is the applied shear load, which is computed as horizontal force per unit length at each wall section. .

fvk is the characteristic shear strength

The design using allowable stresses is based on the following checks:

σnsd<σn(allowable) The normal stress in the cross section wall must be less than the allowable . The normal stress **σnsd** is computed taking into account the eccentricity of the loading at each wall section, and without permitting any tensile stress.

τsd<τ(allowable) The shear stresses at each cross section **τsd=Vsd/bxL**, where **b** is the wall cross section width, and **L** is the length (L=1.00m)

The choice to design the gravity wall according to Eurocode 6 or using allowable stresses, is selected from [**Parameters/Design rules]**

The material properties are defined in [**Parameters/Parameters of retaining walls]** .

15.7.2 Wall materials

Specify the material properties. By clicking at you can choose from the list of wall materials. You edit and update the list of wall materials from [Parameters/Parameters of retaining walls].

You select to perform the wall strength design according to Eurocode 6, then for the wall material properties you specify the self weight in [kN/m³], the compressive strength and the shear strength in [kN/m²].
If you select to perform the wall strength design using allowable stresses, then for the wall material properties you specify the self weight in [kN/m³], the allowable compressive stress and allowable shear stress in [kN/m²].

15.8 Retaining walls of cantilever type

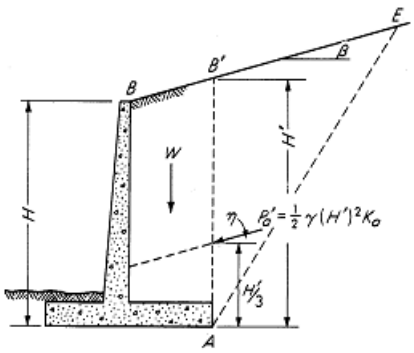

You can design two different types of cantilever walls. The difference between these two is the size of the heel at the back-side of the wall. The computation of the passive and active earth forces is done using Coulomb's theory.

For walls with small back heel the active earth pressure is computed at the back face of the wall and for walls with back heel the active earth pressure is computed at a vertical surface at the end of the heel.

The design of cantilever type walls is based on Ultimate Limit State Design of concrete according to Eurocode 2. The design checks are performed at each tenth of the stem height. The reinforcement of the stem is optimised, and depending on the stem height the reinforcement is reduced toward the top of the wall. The reinforcing bars are automatically placed in the reinforcing bar schedules.

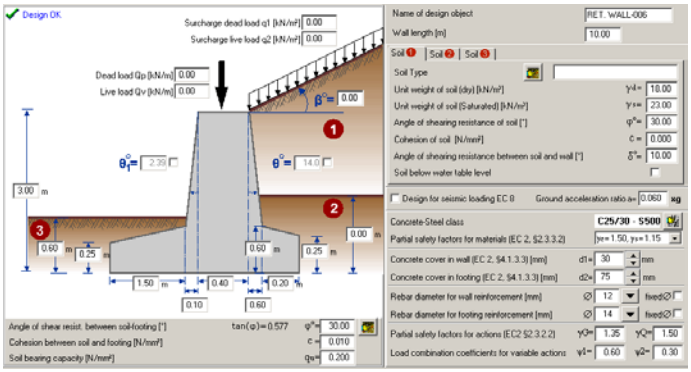
Design OK
Surcharge dead load q1 [kN/m²]
Surcharge live load q2 [kN/m²]
Dead load Qp [kN/m]
Live load Qv [kN/m]
Name of design object
RET. WALL-006
Wall length [m]
Soil Type
Concrete-Steel class
C25/30 - S500
Partial safety factors for materials (EC 2, §2.3.3.2)
Concrete cover in wall (EC 2, §4.1.3.3) [mm]
Concrete cover in footing (EC 2, §4.1.3.3) [mm]
Rebar diameter for wall reinforcement [mm]
Rebar diameter for footing reinforcement [mm]
Partial safety factors for actions (EC2 §2.3.2.2)
Load combination coefficients for variable actions

Wall with small heel at the back-side.

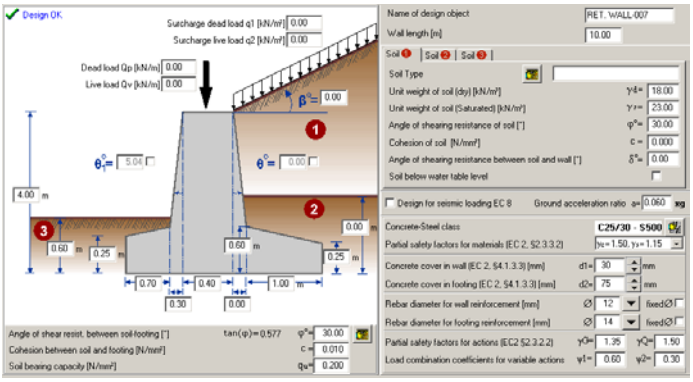
Design OK
Surcharge dead load q1 [kN/m²]
Surcharge live load q2 [kN/m²]
Dead load Qp [kN/m]
Live load Qv [kN/m]
Name of design object
RET. WALL-007
Wall length [m]
Soil Type
Concrete-Steel class
C25/30 - S500
Partial safety factors for materials (EC 2, §2.3.3.2)
Concrete cover in wall (EC 2, §4.1.3.3) [mm]
Concrete cover in footing (EC 2, §4.1.3.3) [mm]
Rebar diameter for wall reinforcement [mm]
Rebar diameter for footing reinforcement [mm]
Partial safety factors for actions (EC2 §2.3.2.2)
Load combination coefficients for variable actions

Wall with large heel at the back-side.

16. Corbels / Brackets

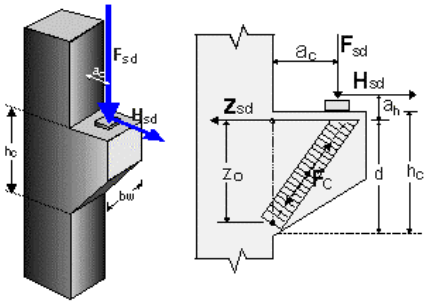

Corbels and brackets are used to support beams and girders. They are short cantilevers projecting from column faces. When ac/hc<=1 then they should be design with deep beam theory rather than flexural theory. Corbels and brackets are designed for vertical and horizontal dead and live point loading, according to Eurocode 2 §5.6.4,§6.5, based on a strut and tie model.

Corbels and brackets are designed according to Eurocode 2 §5.6.4,§6.5. and Annex j.

Corbels with **0.40<=ac/hc<=1** are designed using a simple strut and tie model

Corbels with **ac/hc<0.40** are designed using hc=2ac.

Corbels with **ac/hc>1** are designed using flexural theory, as cantilever beams.

The concrete bearing pressure under bearing plate is also checked.

16.1 Loading

The concentrated vertical load on the bracket, permanent (dead) load Fgk and variable (live) load Fqk, in [kN].

The design vertical load is taken as: **Fsd=γGxFgk+γQxFqk**

You have to specify also the ratio of the horizontal to the vertical force. **Hsd/Fsd**. According to Eurocode 2 Annex J , the corbel should be designed for horizontal force at least **Hsd>0.20 Hsd**.

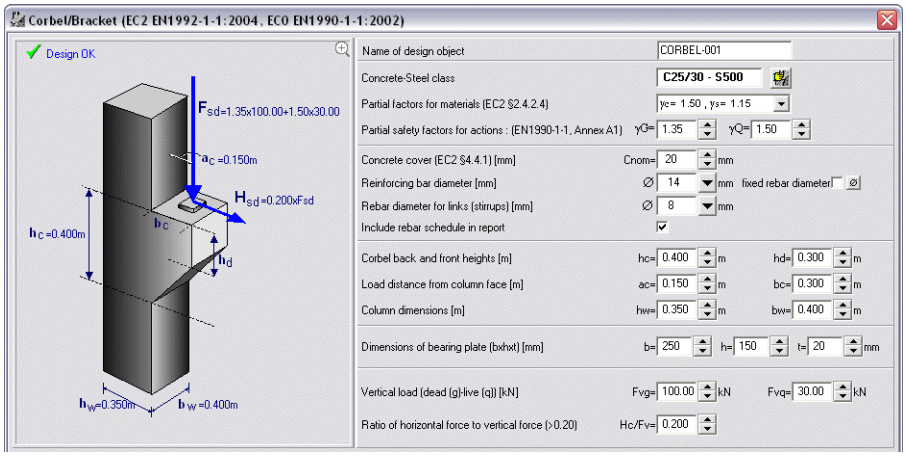

16.2 Bearing capacity at load point

The concrete bearing pressure, under bearing plate, is checked so to not exceed $0.60\nu \cdot \mathbf{fcd}$ Eurocode 2 §6.5.4.b. The area of the bearing plate must be adequate so the bearing capacity of concrete check is satisfied.

16.3 Reinforcement

Eurocode 2 § 5.4.4 .The main tension reinforcement should be anchored beyond the bearing plate using U loops. The minimum-bending diameter of the loop is computed according to Table 8.1.N of Eurocode 2.

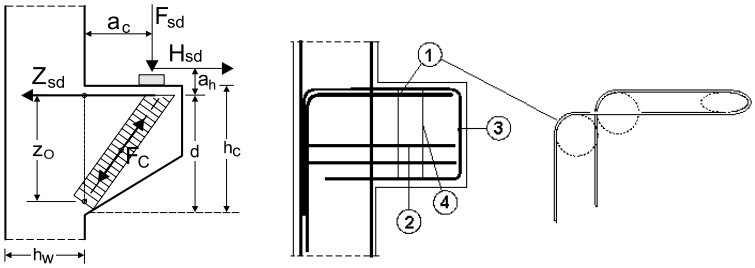

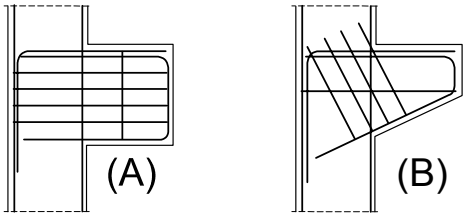

In deep corbels, with **ac/hc**<=0.50, horizontal or inclined closed stirrups are distributed over the effective depth to take the splitting stresses in the concrete strut, with total area Asw>=0.25 As, Annex J.3



In shallow corbels, with **ac/hc**>0.50, vertical stirrups are distributed over the width of the corbel with total area Asw>=0.50 Fsd/fyd, Annex J.3.

17. Deep beams

When **Leff/H<2** then the strain distribution is no longer linear and the shear deformation becomes significant. The usual flexural theory cannot be used. In this case the design of the beam is done according to Eurocode 2 §5.6.4,§6.5, using a simple strut and tie model. You can design deep beams subjected to uniformly distributed dead and live load at the top and bottom face.

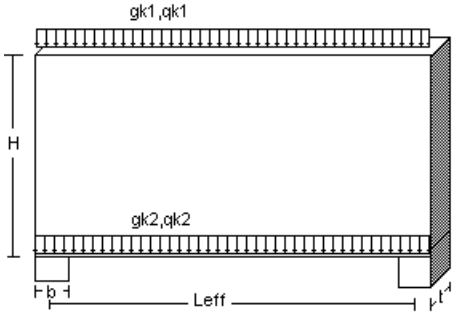

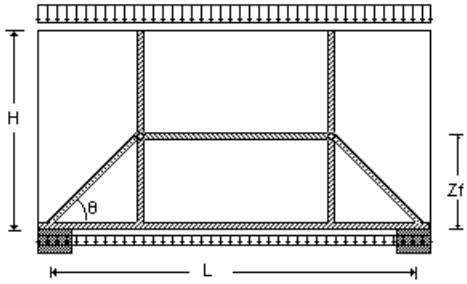

17.1 Design method

Beams with **Leff/H<2**. The design method is based on elasto-plastic material behaviour. The design model, is a simple truss model, combining strut and tie action (Eurocode 2, §5.6.4,§6.5). [Schlaich,J Schafer,K, Konstruieren im Stahlbetonnbau, Betonkalender 82,1993 Teil 2,313-458, Berlin, Ernst&Son,1993.]
The lever arm Zf of internal forces is taken as :
Zf=0.30H(3-H/Leff), when 0.5<H/Leff<=1.0
Zf:=0.60H, when H/Leff>1.0
From the tension in the tie, the horizontal bottom reinforcement is computed. This reinforcement should be fully anchored by bending up the bars, or by using U loops. The concrete compressive stress in the struts must not exceed 0.60.fcd, according to Eurocode 2, §6.5.

Horizontal reinforcement must be distributed over the height Zf, to take the splitting stresses in the concrete struts.

Reinforcement mats must be placed on both faces of the deep beam, in both directions according to Eurocode 2, Annex J.

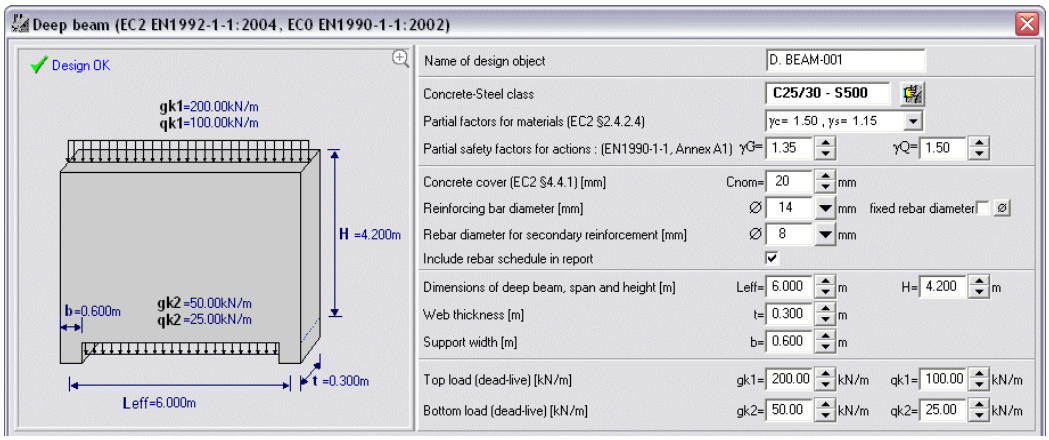

17.2 Reinforcement

The main tension reinforcement at the bottom of the beam, should be fully anchored by bending up the bars, or by using U loops.

Horizontal reinforcement must be distributed over the height Zf, to take the splitting stresses in the concrete struts.

Reinforcement mats must be placed on both faces of the deep beam, in both directions according to Eurocode 2, Annex J.

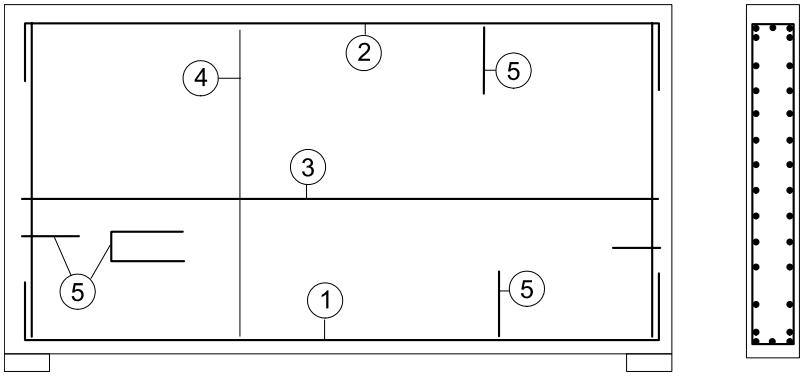

17.3 Dimensions

Dimensions of deep beam, span and height [m]	Leff=	2.00	[m]	H=	3.00 [m]
Web thickness [m]	t=	0.200	[m]		
Support width [m]	b=	0.500	[m]		

You give the dimensions in meters [m] according to the drawing below.

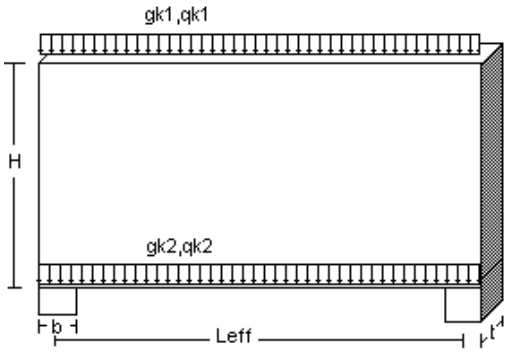

17.4 Loading

Top load (dead-live) [kN/m]	gk1=	200.00	[kN/m]	qk1=	100.00 [kN/m]
Bottom load (dead-live) [kN/m]	gk2=	50.00	[kN/m]	qk2=	25.00 [kN/m]

Give the vertical loading a the top and the bottom face of the deep beam, permanent (dead) load gk1 and gk2 and variable (live) load qk1 and qk2, in [kN/m].

The design vertical load is taken as: **Fsd=γGxgk+γQxqk**

18. Reinforcement schedule

A detailed reinforcement schedule is produced. The design objects that participate in the bar schedule are the ones checked in the Design objects window, and their order of appearance can be changed from the Design objects window. For the supports of the two way plates you can select the way the reinforcing bars are shown in the reinforcement schedule from the menu [Edit reinforcement schedule]. They can show in double length symmetrical over the support center or half length.

You can edit the reinforcing bar schedule. You have to notice that if you make changes you must save the schedule in a file. By clicking at column C the type (plate, beam, etc..) of the concrete object can be selected. By clicking at [sketch], you can select the rebar type.

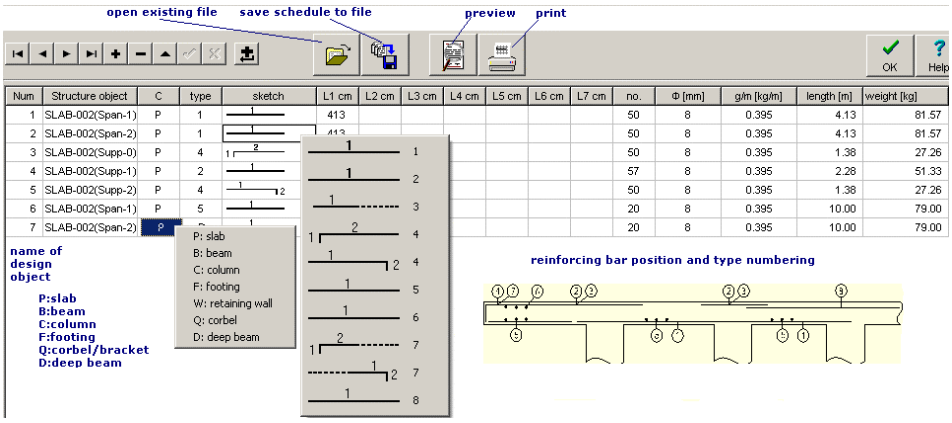

Reinforcing bar schedule

Num	Structure object	type	reinforcing bar [cm]	no.	Φ [mm]	g/m [kg/m]	length [m]	weight [kg]
1	SLAB-002(Span-1)	P1	413	50	8	0.395	4.13	81.57
2	SLAB-002(Span-2)	P1	413	50	8	0.395	4.13	81.57
3	SLAB-002(Supp-0)	P4	10 128	50	8	0.395	1.38	27.26
4	SLAB-002(Supp-1)	P2	228	57	8	0.395	2.28	51.33
5	SLAB-002(Supp-2)	P4	128 10	50	8	0.395	1.38	27.26
6	SLAB-002(Span-1)	P5	1000	20	8	0.395	10.00	79.00
7	SLAB-002(Span-2)	P5	1000	20	8	0.395	10.00	79.00
	Total weight [kg]							426.99

18.1 Reinforcement schedule for plates

Project Beton **Slab schedule** Pg. 1

slab name		h [cm]	Lx [m]	Ly [m]	span reinforcement x-x	span reinforcement y-y	support reinforcement ◻	support reinforcement ❒	support reinforcement ❑	support reinforcement ❐
SLAB-001	◻	18.0	4.00	4.00	⌀8/20.0_	⌀8/20.0	⌀8/20.0	⌀8/20.0	⌀8/20.0	⌀8/20.0
SLAB-002(1)	❒	15.0	4.00	10.00	⌀8/20.0_	⌀8/20.0	⌀8/20.0	⌀8/20.0		
SLAB-002(2)	❒	15.0	4.00	10.00	⌀8/20.0_	⌀8/20.0	⌀8/20.0	⌀8/20.0		
SLAB-002(3)	◻	15.0	4.00	10.00	⌀8/20.0_	⌀8/20.0	⌀8/20.0	⌀8/20.0		
SLAB-003(1)	❒	15.0	3.00	10.00	⌀8/20.0_	⌀8/20.0	⌀8/20.0	⌀8/19.0		
SLAB-003(2)	❒	17.0	5.00	10.00	⌀8/20.0_	⌀8/20.0	⌀8/19.0	⌀8/15.0		
SLAB-003(3)	◻	15.0	4.00	10.00	⌀8/20.0_	⌀8/20.0	⌀8/15.0	⌀8/20.0		
SLAB-004	❒	20.0	5.00	6.00	⌀8/18.0_	⌀8/18.0	⌀8/20.0	⌀8/17.0	⌀8/18.0	⌀8/20.0

(_=bottom layer of reinforcement, ^=span reinforcement at top,:=reinforcement at top and

You can edit the reinforcing bar schedule for the slabs. You have to notice although that if you make changes you have to save the schedule in a file. The design objects that participate in the bar schedule are the ones checked in the Design objects window, and their order of appearance can be changed from the Design objects window.

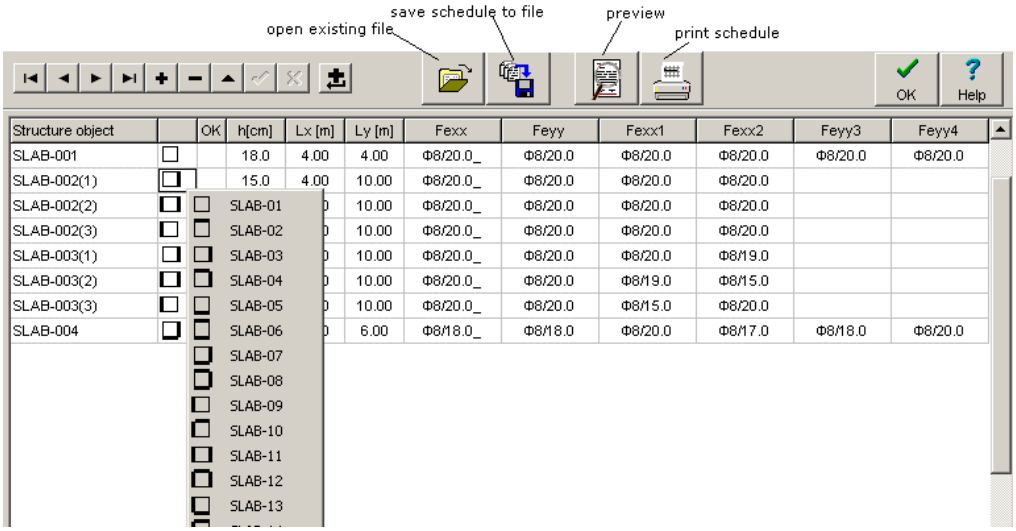

18.2 Reinforcement schedule for beams

Project Beton **Beam schedule** Pg. 1

beam name	Span		Support-A		Support-B		Stirrups
	bottom	top	top	bottom	top	bottom	
BEAM-001 Span -1 L=4.00[m] B=0.25m h=0.50m	3Φ14 1Φ16	2Φ12			4Φ14 1Φ16		Φ8/16.0
BEAM-001 Span -2 L=4.00[m] B=0.25m h=0.50m	3Φ14 1Φ16	2Φ12	4Φ14 1Φ16				Φ8/16.0
BEAM-002 Span -1 L=5.00[m] B=0.25m h=0.50m	6Φ18 1Φ12	2Φ14					Φ8/17.0
BEAM-003 Span -1 L=4.00[m] B=0.25m h=0.50m	3Φ14 1Φ18	2Φ12			3Φ14 1Φ18		Φ8/17.0
BEAM-003 Span -2 L=4.00[m] B=0.25m h=0.50m	4Φ12	2Φ12	3Φ14 1Φ18		2Φ14 1Φ16		Φ8/20.5
BEAM-003 Span -3 L=4.00[m] B=0.25m h=0.50m	3Φ12 1Φ14	2Φ12	2Φ14 1Φ16		4Φ14		Φ8/22.0
BEAM-003 Span -4 L=4.00[m] B=0.25m h=0.50m	3Φ12 1Φ14	2Φ12	4Φ14		2Φ14 1Φ16		Φ8/22.0
BEAM-003 Span -5 L=4.00[m] B=0.25m h=0.50m	4Φ12	2Φ12	2Φ14 1Φ16		3Φ14 1Φ18		Φ8/20.5
BEAM-003 Span -6 L=4.00[m] B=0.25m h=0.50m	3Φ14 1Φ18	2Φ12	3Φ14 1Φ18				Φ8/17.0

19. CAD drawing of concrete elements

The CAD modulus of the program automatically creates detailed drawings of spread footings, retaining walls, corbels and deep beams. You can adjust the scale of the drawing, and you can choose the visible layers. The properties of the drawing components, (line thickness, colour, text size) can also be adjusted. You can also specify the dimension units that are used.

Before previewing or printing the drawing you can select printing paper size, and move the drawing to the desired position on the paper.

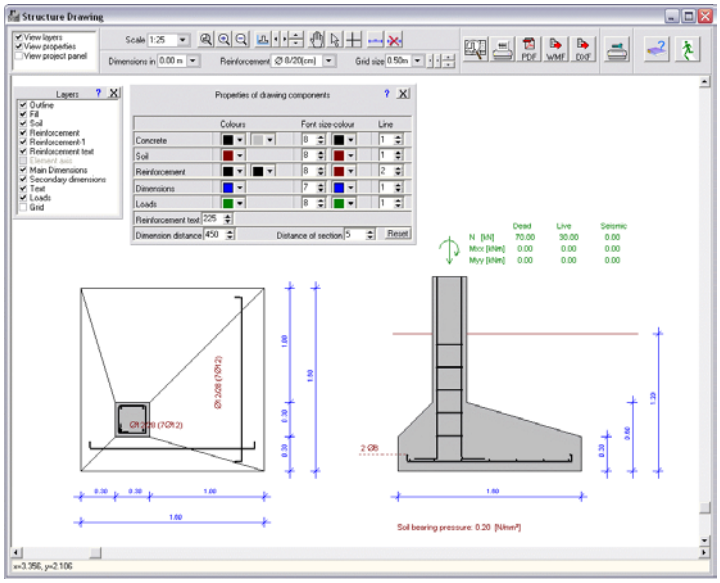

19.1 CAD Features

Scale of Drawing	Zoom	Layers	Dimension units/ Reinforcement	Grid
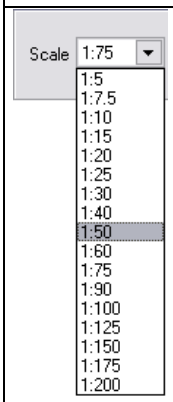				

Scale/Move/Zoom If you cannot see all or parts of the object on the screen, you can scale or move your drawing. You activate/deactivate the move command (hand) by double clicking on the drawing.

By right click you can change cursor.

Layers Choose the layers you want to be visible and printed. The properties of the layers are defined of the Properties of drawing components.

19.1.1 Dimension units

Choose unit for dimensions appearing on the drawing. This will be the default unit until you change it.

Grid. If you want the grid to appear, from the layers panel, check the grid and choose the size from the pull down menu. By clicking on the small arrows on the right, you move the grid in relation to the drawing.

19.1.2 Line thickness, colour and font sizes

By using this panel you can adjust the appearance of the drawing.

Turn on or off the layers from the panel with Layers.

For the line type of **Axis and nodes**, choose line thickness **1 for dashed line**, line thickness 2 for the thinner solid line etc.

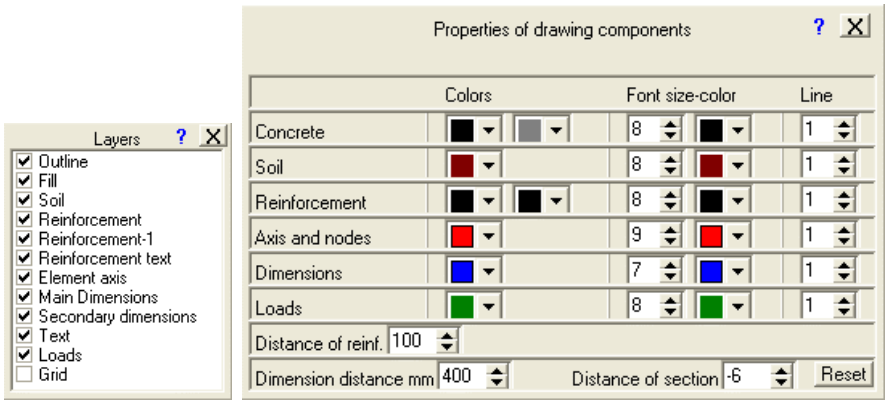

There are three levels of dimensioning. By adjusting the dimension distance you move the dimension lines further or closer to the design object.

By adjusting the Text distance you move the text further or closer to the design object.

The values you are setting are maintained automatically. By clicking at Reset you restore the original default values of the program.

19.1.3 Add extra dimensions

If you want to add extra dimensions on the drawing, use the . Click on the point at beginning and the end of the distance you want to insert. Stop the process by right click.

If you want to remove all the extra dimensions added, use the .

For the standard dimensions, use the layer function to turn the dimension on or off.

The extra dimensions added are not maintained in the data file.

19.2 Print - preview drawing

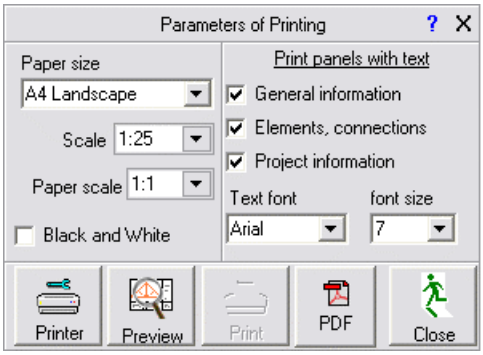

Before you print your drawing it is advisable to preview the contents of you drawing first.

Click on the Preview Button and set the parameters of printing.

Choose Paper size and orientation, Scale and check for Black and White **according to your printer.**

You move (click on the drawing and move the mouse) the drawing to place it at the desired position inside the drawing paper.

In case your screen size does not allow you to see all the drawing paper by choosing another Paper scale you scale down the screen image.

Choose the text panels you want included in your drawing.

When you check/uncheck a text panel you can see the area available for drawing is changing.

You can change text font and size. Be aware if you increase the text size in A4 paper. The text can become too large for the text area.

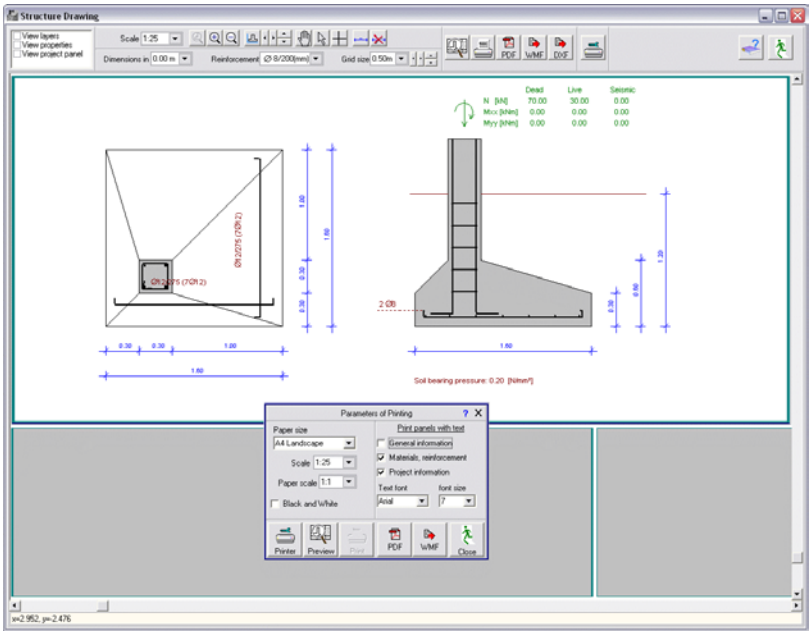

Print preview drawing.

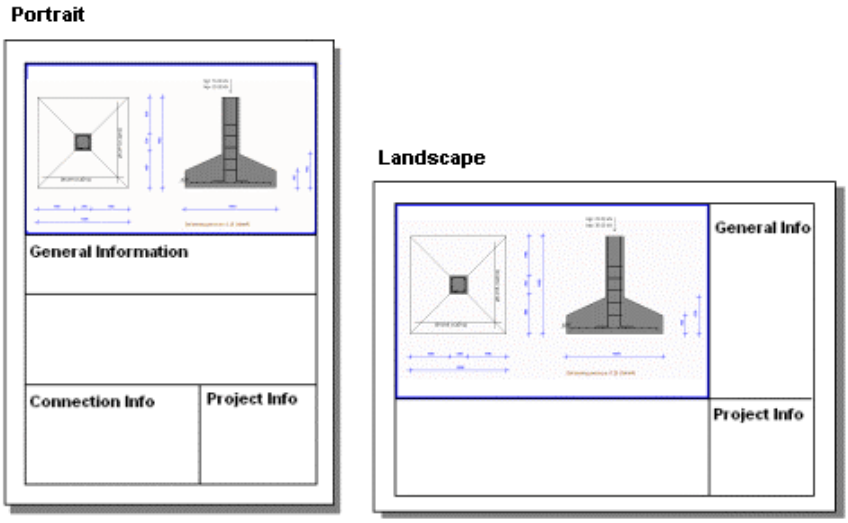

Page orientation for drawings.

19.3 Project panel

To edit appearance of the text panel for the drawings check the fields you want to be included and type the wanted text.

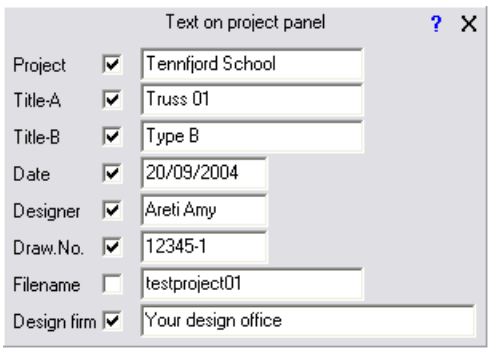

The project title is automatically taken from the name of the project.

The title A is automatically taken from the name of the design object.

The Design Firm title is automatically taken from the settings of the report parameters, see pg. 28, report page footer.

19.4 Export drawing to PDF format

From the CAD modulus of the program you can save your drawing in PDF format

19.5 Export drawing to dxf format

From the CAD modulus of the program you can save your drawing in .dxf format. This file can be read from Autocad In the window that appears specify the file name and adjust the text size and decimal symbol in the new file.

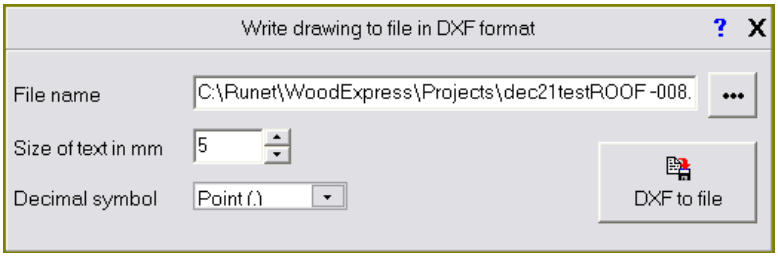

20. Program settings

20.1 Greek character setup

According to the notation used in the Eurocodes the report contains many Greek mathematical symbols. Depending on the Window installation the Greek mathematical symbols may or may not appear right. If you have Windows XP or 2000 you can add Greek language support in your Windows. Go to [Settings/Control Panel/Regional and Language Options/Advanced].

If your Windows do not support Greek mathematical symbols, then from [Setup/Greek character support] select NO . The Greek characters will appear as: alpha, beta etc. , in the report.

20.2 Language Set Up

The program interface and reports are in various languages. You can choose the language of the program from the menu [Setup/Language Set-Up]. Choosing the language the program will close and when it will be opened again is going to be in the new language.

20.3 Decimal point symbol

You specify (.) or (,) for the decimal point appearing in the input data and the reports.

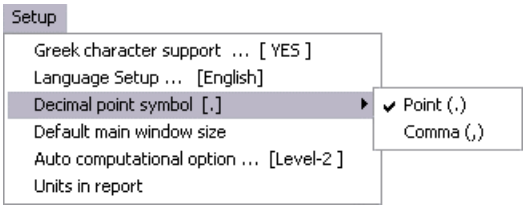

20.4 Screen sizes

The size of each window bas been optimised.

You can resize the main screen, and its size is maintained. The size of the main screen is automatically set to the size the last time you opened the program. You can reset the main screen to the default size by clicking at [Setup/Default screen size].

The calculation window takes a height almost equal to the height of the main program window.

20.5 User's guide

You can preview, or print the program user's manual. You select to view it as a Word (doc) or as an Acrobat (pdf) document.

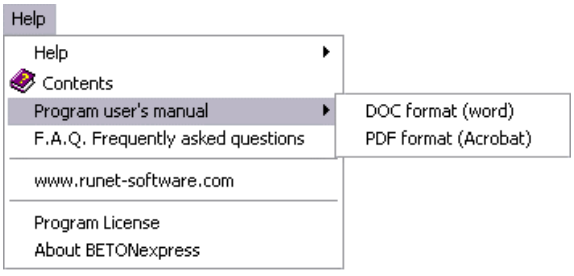

21. Reports

After designing the desired concrete objects they can be printed into a high quality report. The report will contain all the objects that are checked in the [design objects] window. The order of which the objects will appear in the report can be adjusted with the two arrows at the bottom of the design objects window. Adjustments for the report, font, margins, logo of caption or footnote, etc. can be done from [Report Setup].

21.1 Preview report



The report preview contains all the objects that are checked in the [design objects] window. You can adjust the order in which the object appears in the report by using the two arrows at the bottom of the [design objects] window.

In order to preview the report you must have a valid printer installed in your system. If you work in a network there must be installed a network printer. Otherwise the system will report – invalid printer. In this case simply connect/add a printer, or select another printer as default.

From the [Report Setup] you can adjust the looks of your report such as font, margins, logo of caption or footnote, etc. In [Report Setup/Various/Change page for each chapter], you can choose to start each design object in a new page.

21.2 Printing report

The report contains all the objects that are checked in the [design objects] window. The order of the objects appearing in the preview can be adjusted with the two arrows at the bottom of the design objects window.

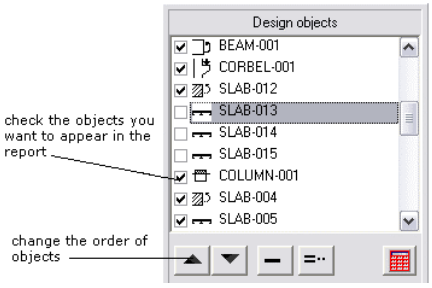

In order to print a report you must have a valid printer installed in your system. If you work in a network there must be installed a network printer. Otherwise the system will report – invalid printer. In this case simply connect/add a printer, or select another printer as default.

Adjustments for the report, font, margins, logo of caption or footnote, etc. can be done from Report Setup. In [Report Setup/Various/Change page for each chapter], you can choose to start each design object in a new page.

From the printing dialog you can adjust the page number of the first page and the left margin in mm. More adjustments for the report, font, margins, logo of caption or footnote, etc. can be done from Report Setup.

In [Report Setup/Various/Change page for each chapter], you can choose to start each design object in a new page.

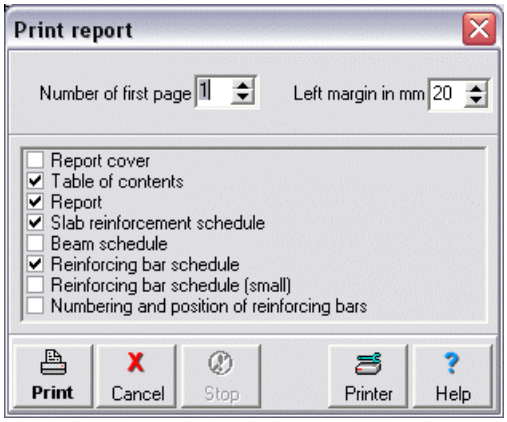

21.3 Report to file

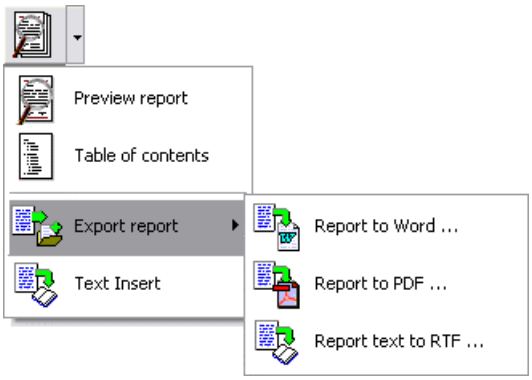

You can transfer the report (text only) to a RTF file, which can be opened by Microsoft's Word. In order for the report to appear right in the Word, select all the text, expand the margins and set font to courier new and the font size to10.

If your windows do not support Greek character set, the Greek mathematical symbols will not appear right. Depending on the Window installation the Greek mathematical symbols may not appear right. If you have Windows XP or 2000 you can add Greek language support in your Windows, from Windows [Settings/Control Panel/Regional and Language Options/Advanced].

If your windows do not support Greek mathematical symbols, then from [Setup/Greek character support] select the language without the support of Greek mathematical symbols. Thus the Greek characters will appear as alpha, beta etc.

21.4 Text insert

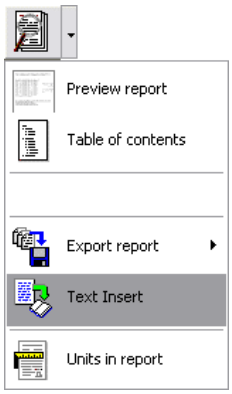

You can insert your own text in the report, with the [Preview/Text Insert] command.

In the window which opens, write the text or read it from a ***.rtf** file. This text object can be treated like all the other objects of the program.

21.5 Report editing

To edit the report, save the file to word or rtf format and do the changes from the new document.

21.6 Printer Setup

Select printer, and adjust printer properties. Standard Windows dialog.

21.7 Troubleshooting

Greek Mathematical symbols

According to the notation used in the Eurocodes the report contains many Greek mathematical symbols. Depending on the window installation the Greek mathematical symbols may not appear right. In case you have windows XP or 2000 you may add Greek language support in your windows, from windows [Settings/Control Panel/Regional and Language Options/Advanced].

In case your windows do not support Greek mathematical symbols, then from [Setup/Language Set-Up] select the language without the support of Greek mathematical symbols. In this case the Greek characters appear explicit e.g. alpha, beta etc.

22. Report parameters

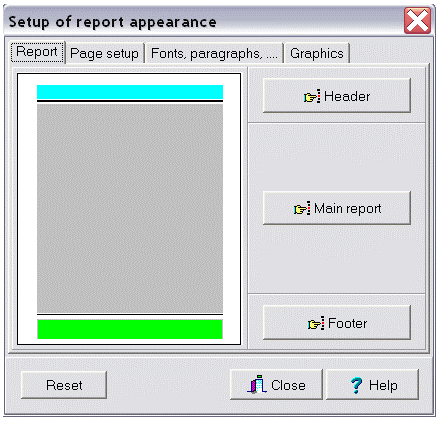

From the main menu you can adjust the appearance and the printout of the reports by using the [report parameters setup].

22.1 Report –setup

Header, page footer, paper size, orientation, line distance, margins etc.

22.1.1 Report Page Header

Header On the page's header it can appear, a small picture (bitmap), at the project title, the chapter title, the page number and an horizontal line underneath. By checking the corresponding boxes you can choose which of the above objects you want to appear on the caption. The position of these objects is regulated from the numbers in mm you specify in the boxes in columns 2 and 3. In the last column you can set the font, or select a bitmap for the icon, or the thickness and colour of the line. At the page place you can specify the letters you want to appear before the page number e.g. Pg. With the buttons at the bottom you can preview or print a sample of the header.

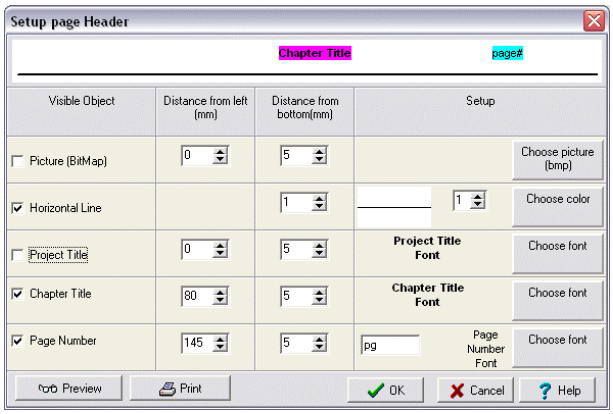

22.1.2 Main report

Main report You select the font type, as well as the size of the font. For the font type it is **wise to select non proportional fonts, such as Courier, Courier new, Lucida Console, so that the report formulas and tables to be aligned properly**.

You can also specify the page margins (left, right, top, bottom) in millimetres (mm).

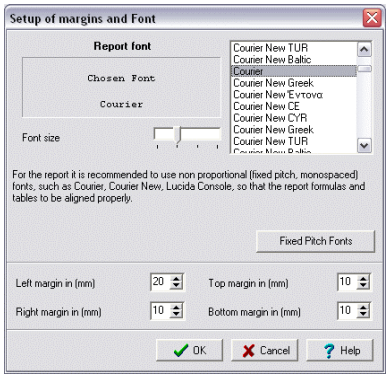
Setup of margins and Font
Report font
Chosen Font
Courier
Font size
Courier New TUR
Courier New Baltic
Courier
Courier New Greek
Courier New Έντονα
Courier New CE
Courier New CYR
Courier New Greek
Courier New TUR
For the report it is recommended to use non proportional (fixed pitch, monospaced) fonts, such as Courier, Courier New, Lucida Console, so that the report formulas and tables to be aligned properly.
Fixed Pitch Fonts
Left margin in (mm)
Top margin in (mm)
Right margin in (mm)
Bottom margin in (mm)
OK
Cancel
Help

22.1.3 Report page footer

Footer On the page's footer it can appear, the logo of the design firm, the file name of the project, the report subtitle or chapter title, the report date, and an horizontal line on top. By checking the corresponding boxes you can choose which of the above objects you want to appear on the caption. The position of these objects is regulated from the numbers in mm you specify in the boxes in columns 2 and 3. In the last column you can set the font, or the thickness and colour of the line.

With the buttons at the bottom you can preview or print a sample of the page footer.

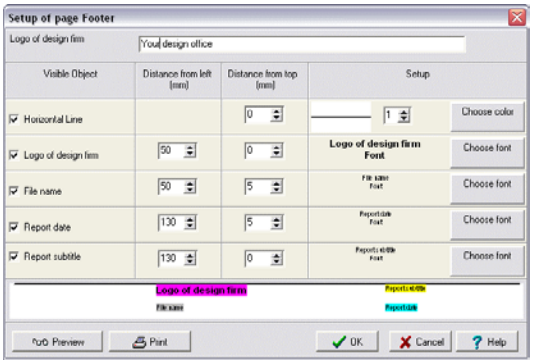

22.2 Page setup

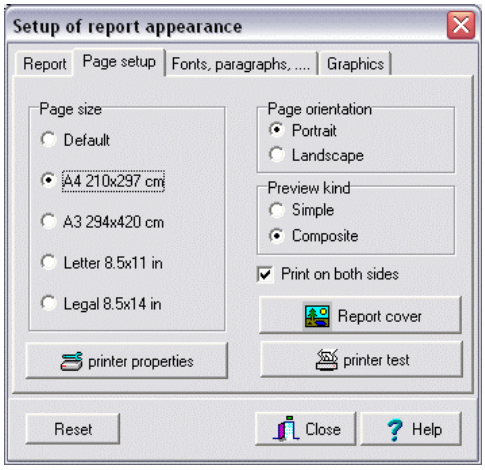

22.2.1 Report cover

You can design your own front page of the report. From [Report Setup/Page Preview/Report Cover]

you can edit the features on the cover of the report. The cover can be displayed with an outline, a picture (from bitmap file) and two text lines. You can adjust the contents with the checkboxes.

The outline's colour and thickness be changed.

If you wish a picture on the cover, you can choose from the examples or choose your own bitmap.

The style of text in the two text lines from the font style editor box.

You can Preview your new report cover and also do test print.

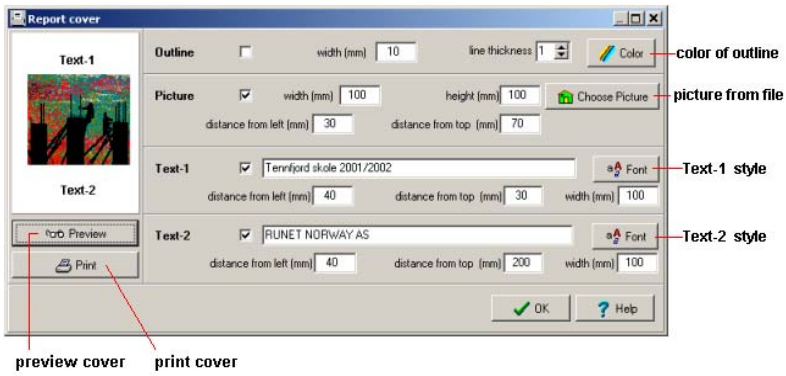

22.2.2 Report setup, Various

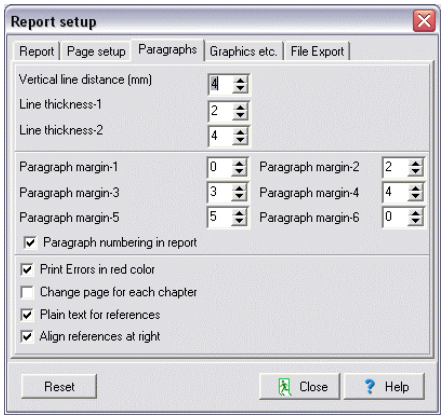

Report paragraphs etc.

If you check, [**Change page for each chapter**], The computations of every design objects will start on a new page.

If you check, [**Print Errors in red colour**], warnings will be printed in red when computations are not satisfying the codes or standards.

You can adjust the line distance in mm and the paragraph left margin in characters.
The indentation of paragraphs can be adjusted from the margin already set in [Report setup/Page-setup/main report]. The indentation can be adjusted in characters (not mm).

margins are according to the figure.

paragraph margin-1 — **Computations of structure object : COLUMN-001**

paragraph margin-2 — **Column cross section in biaxial bending**

EC 2, Table 2.3 (ac=1.50, as=1.15)

paragraph margin-3 — Concrete-Steel class: C25/30-S500, Concrete cover (EC 2, §4.1.3.3)

Column of rectangular cross section b=0.300 m, h=0.300 m

paragraph margin-3 — Loads, axial Nsd=100.00 kN, moments Msdxx=0.00 kNm,Msdyy=0.00 kNm

```
Msdxx=     0.0 kNm isdxx=(Msdxx/bh²fcd)=     0.0/(0.300x0.300²x16700
Msdyy=     0.0 kNm isdyy=(Msdyy/hb²fcd)=     0.0/(0.300x0.300²x16700
Nsd  =- 100.0 kN      vd=(Id/(bhfcd)    =- 100.0/(0.300x0.300 x16700
from biaxial bending with compression diagrams utot=0.10
```

23. Program settings

23.1.1 Greek character support

According to the notation used in the Eurocodes the report contains many Greek mathematical symbols. Depending on the Window installation the Greek mathematical symbols may or may not appear right. If you have Windows XP or 2000 you can add Greek language support in your Windows. Go to [Settings/Control Panel/Regional and Language Options/Advanced].

If your Windows do not support Greek mathematical symbols, then from [Setup/Greek character support] select NO. The Greek characters will appear as: alpha, beta etc. , in the report.

23.1.2 Language Set Up

You can choose the language of the program from the menu Setup/Language Setup]. By changing the language and confirm it by [apply] program will close down. When you reopen, the program will appear with the selected language.

23.1.3 Decimal point symbol

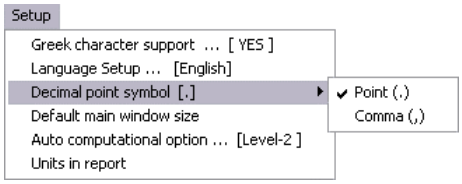

You specify (.) or (,) for the decimal point appearing in the input data and the reports.

23.1.4 Screen dimensions

You can resize the main screen, and its size is maintained. The size of the main screen is automatically set to the size the last time you opened the program. You can reset the main screen to the default size by clicking at [Setup/Default screen size].

The windows which are opened inside the main window have a height limited by the height of the main screen. If you want to have these windows larger, simply open the main screen. .

23.1.5 User's guide

You can preview, or print the program user's manual. You select to view it as a Word(doc) or as an Acrobat (pdf) document.

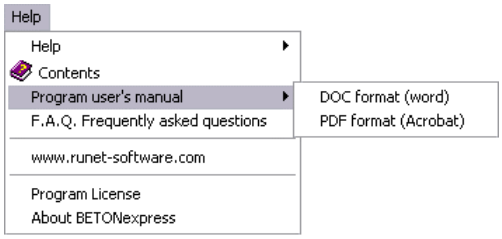

24. Engineering tools

24.1.1 Unit conversion Cross sections

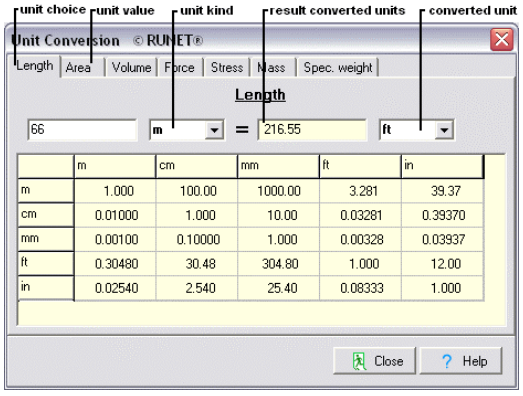

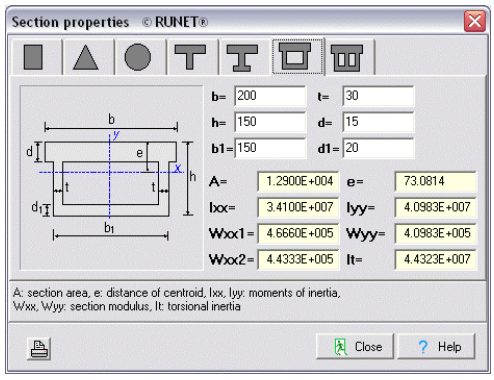

Cross section properties. Give the cross section dimensions b,h,...etc, and the cross section properties (area, moments of inertia, and section modulus), are computed.

24.1.2 Areas (x,y coordinates)

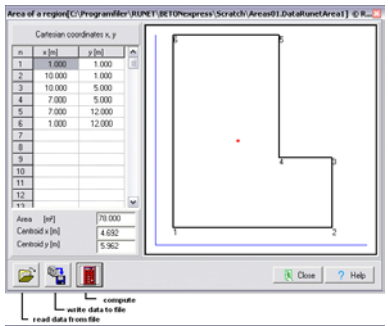

To find the area of a more or less complicated shapes you can use the area of the region .

Give the points of the border line of an area, in polar (r , theta) coordinate. The area and the centroid of the region are computed. On the right of the window appears a sketch of the region, and the centroid is marked in red. with the buttons at the bottom left you can save the data in a file and read them back again later.

24.1.3 Area (polar coordinates)

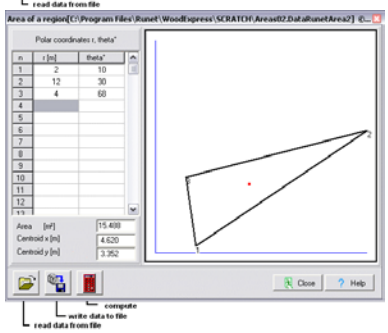

Give the points of the border line of an area, in polar (r , theta) coordinate. The area and the centroid of the region are computed. On the right of the window appears a sketch of the region, and the centroid is marked in red. with the buttons at the bottom left you can save the data in a file and read them back again later.

24.1.4 Areas (sum of triangles)



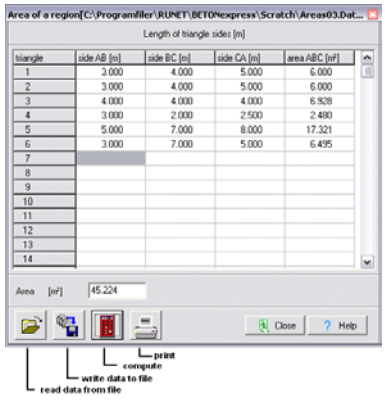

25. Eurocodes

Group of standards for the structural and geotechnical design of buildings and civil engineering works. These standards is a set harmonized technical rules for civil engineering works, in the members of the European Community. National Application Documents are national standard for adapting the Eurocode to native requirements.

The structural Eurocodes are:

Eurocode 0	1990:2002	Basis of structural design
Eurocode 1	EN 1991-1-1:2002	Actions on structures – general actions – Densities, self-weight and imposed loads.
	EN 1991-1-2:2002	Actions on structures – general actions – Actions on structures exposed to fire
	EN 1991-1-3:2003	Actions on structures – general actions – Snow loads
	EN 1991-1-4:2005	Actions on structures – general actions – Wind actions
	EN 1991-1-5:2003	Actions on structures – general actions – Thermal actions
	EN 1991-1-6:2005	Actions on structures – general actions – Actions during execution
	EN 1991-1-7:2005	Actions on structures – general actions – Accidental Actions
Eurocode 2	EN 1992-1-1:2004	Design of concrete structures, General rules and rules for buildings
	EN 1992-1-2:2004	Design of concrete structures, General rules -Structural fire design
Eurocode 3	EN 1993-1-1:2005	Design of steel structures
Eurocode 4	EN 1994-1-1:2004	Design of composite steel and concrete structures, General rules and rules for buildings
Eurocode 5	EN 1995-1-1:2004	Design of timber structures – General – Common rules and rules for buildings
	EN 1995-1-2:2004	Design of timber structures – General – Structural fire design
Eurocode 6	EN 1996-1-1:2005	Design of masonry structures, General rules for reinforced and unreinforced masonry structures
	EN 1996-1-2:2005	Design of masonry structures, General rules - Structural fire design
Eurocode 7	EN 1997-1:2004	Geotechnical design - General rules
Eurocode 8	EN 1998-1:2004	Design of structures for earthquake resistance, General rules, seismic actions and rules for buildings
	EN 1998-5:2004	Design of structures for earthquake resistance, Foundations, retaining structures and geotechnical aspects
Eurocode 9	EN 1999-1-1	Design of Aluminium structures, General rules

25.1 Eurocode 0 EN 1990:2002, Load combination

According to Eurocode EN 1990:2002 the design values for actions should be combined as

$\Sigma\gamma_{G,j}\, G_{k,j} + \gamma_{Q,1}\, Q_{k,1} + \Sigma\gamma_{Q,i}\, \psi_{Q,i}\, Q_{ki}$

Factors for combining permanent and variable actions, Eurocode 0 Annex A1.

Usual values for these factors are $\gamma_G = 1.35$, and $\gamma_Q = 1.50$.

25.2 Eurocode 2, concrete design

25.2.1 Concrete (Eurocode 2 §3.1)

The strength class of concrete is classified by the cylinder strength or the cube strength Eurocode 2 §3.1.2.4

fck: characteristic compressive cylinder strength at 28 days

fck,c: characteristic compressive cube strength

fctm: mean axial tensile strength

fctk0.05: minimum tensile strength

fctm0.95: maximum tensile strength

fct,fl: flexural tensile strength

fvck: shear strength

Ec: modulus of elasticity

Gc: Shear modulus

w: unit weight

Poissons ration can be taken 0.20

Coefficient of thermal expansion 0.00001 /°C

Creep and shrinkage of concrete

Density for normal weight concrete between 2000 and 2888 kg/m³ (usual value 2400 kg/m³)

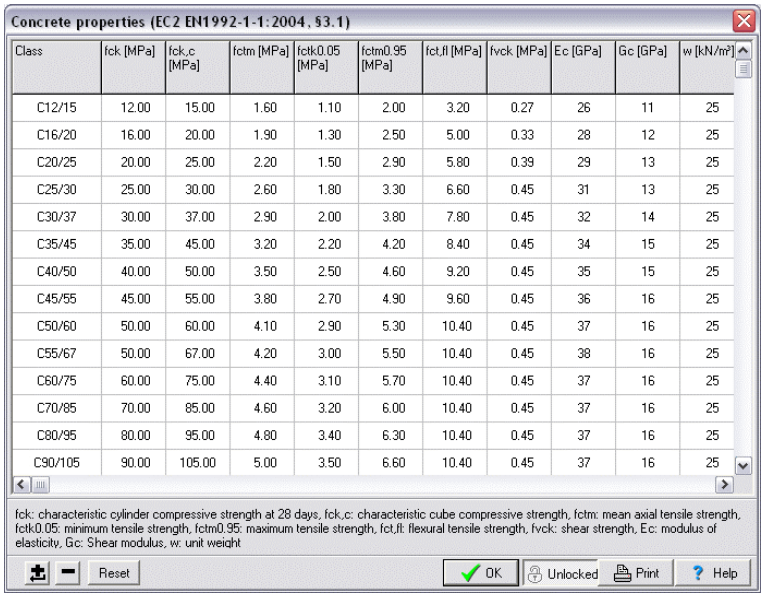

25.2.2 Reinforcing steel Eurocode 2, §3.2

The reinforcing steel is classified according to the characteristic yield stress **fyk**

fyk: characteristic yield strength

ftk,c: tensile strength

Es: modulus of elasticity

euk: elongation at maximum load.

L: steel bar length

Mean value for density 7885 kg/m³

Coefficient of thermal expansion 0.00001 /°C

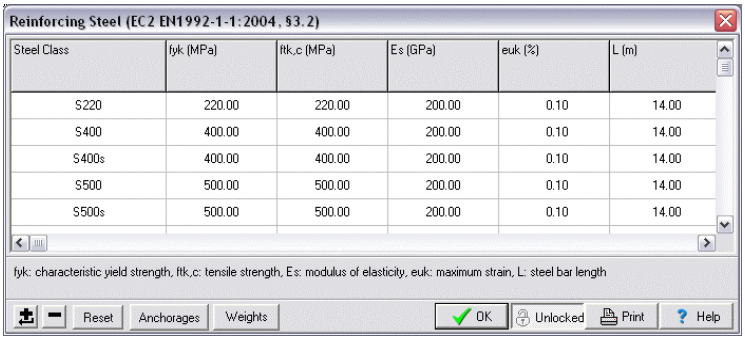
Reinforcing Steel (EC2 EN1992-1-1:2004, §3.2)
Steel Class | fyk (MPa) | ftk,c (MPa) | Es (GPa) | euk (%) | L (m)
S220 | 220.00 | 220.00 | 200.00 | 0.10 | 14.00
S400 | 400.00 | 400.00 | 200.00 | 0.10 | 14.00
S400s | 400.00 | 400.00 | 200.00 | 0.10 | 14.00
S500 | 500.00 | 500.00 | 200.00 | 0.10 | 14.00
S500s | 500.00 | 500.00 | 200.00 | 0.10 | 14.00
fyk: characteristic yield strength, ftk,c: tensile strength, Es: modulus of elasticity, euk: maximum strain, L: steel bar length
Reset
Anchorages
Weights
OK
Unlocked
Print
Help

Ductility characteristics

Height ductility euk>5% value of (ft/fy)k>1.08

Normal ductility euk>2.5%, value of (ft/fy)k>1.05

25.2.3 Concrete cover Eurocode 2 § §4.4.1.2.

Concrete cover is the distance between the outer surface of the reinforcement and the nearest concrete surface. Minimum required concrete cover depending on the environmental conditions is given in Eurocode 2 §4.4.1.2.

In general

The minimum cover for dry environment and for interior of buildings is 15 mm, for humid environment without frost 20 mm, and for humid environment with frost 25 mm. For more severe environment as humid environment with frost and de-icing salts, or seawater environment, for interior and exterior concrete components the minimum cover is 40 mm.

Other references:

Ultimate limit state for bending Eurocode 2 § 6.1

Shear Eurocode 2 § 6.2

Punching, Eurocode 2 § 6.4

Torsion Eurocode 2 § 6.3.

25.3 Eurocode 7, Geotechnical design

Eurocode 7, EN 1997-1:2004, Geotechnical design – General rules, Annex A, for EQU STR and GEO limit cases

A. 2. Partial factors for equilibrium limit state (EQU) verification.

Table A.1
Partial factors on actions (γF)

Action	Symbol	Value
Permanent		
Unfavourable[a]	$\gamma_{G;dst}$	1,1
Favourable[b]	$\gamma_{G;stb}$	0,9
Variable		
Unfavourable[a]	$\gamma_{Q;dst}$	1,5
Favourable[b]	$\gamma_{Q;stb}$	0
[a] Destabilising [b] Stabilising		

Table A.2
Partial factors for soil parametrers (γM)

Soil parametrers	Symbol	Value
Angle of shearing resistance[a]	$\gamma_{\varphi'}$	1,25
Effective cohesion	$\gamma_{c'}$	1,25
Undrained shear strength	γ_{cu}	1,4
Unconfined strength	γ_{qu}	1,4
Weight density	γ_{γ}	1,0
[a] This factor is applied to tan φ'		

A.3. Partial factors for structural (STR) and geotechnical (GEO) limit states verification.

Table A.3.
Partial factors on actions (γ'_F) or the effects of actions (γ'_E)

Action		Symbol	Set	
			A1 (STR)	*A2* (GEO)
Permanent	Unfavourable	γ'_G	1,35	1,0
	Favourable		1,0	1,0
Variable	Unfavourable	γ'_Q	1,5	1,3
	Favourable		0	0

Table A.4.
Partial factors for soil parameters (γ'_M)

Soil parametrers	Symbol	Set	
		M1 (STR)	*M2* (GEO)
Angle of shearing resistance[a]	$\gamma_{\varphi'}$	1,0	1,25
Effective cohesion	$\gamma_{c'}$	1,0	1,25
Undrained shear strength	γ_{cu}	1,0	1,4
Unconfined strength	γ_{qu}	1,0	1,4
Weight density	γ_{γ}	1,0	1,0
[a] This factor is applied to tan φ'			

25.4 Eurocode 8, Seismic design

Seismic design is included in the footings, and in retaining walls Eurocode 8 Part 5

In footings
You specify the additional vertical loading and moments Mxx and Myy on the top of the footing due to earthquake.

Two additional design load combinations are treated according to Eurocode 8.

Loading-2 **Dead + ψ2xLive + Seismic x-x,**

Loading-3 **Dead + ψ2xLive + Seismic y-y**

A restriction in seismic design is for the ratio of the (effective footing area)/(footing area)< coefficient, defined in [Parameters/Retaining walls]. This coefficient has a default value 0.50.

In retaining walls
You specify the design ground acceleration ratio **α**. The horizontal seismic acceleration is taken as **ah=αxg** (where g is the acceleration of gravity).

The final horizontal and vertical seismic coefficients affecting all the masses are taken according to Eurocode 8 Part 5,§ 7.3.2as: **kh=α/r**, and **kv=cxkh**. The coefficients **r** and **c** are defined in the [Parameters/Retaining walls], and usually values are **r=1.50**, **c=0.50**.

In the seismic loadings the effect of passive earth force is taken into account with a reduced factor defined in [Parameters/Retaining walls] and has an usual value 0.50.

A restriction in seismic design is for the ratio of the (effective footing area)/(footing area)< coefficient, defined in [Parameters/Retaining walls]. This coefficient has an usual value 0.50.

An additional restriction is according to Eurocode 8 Part 5,§ 7.3.2 3 (6) for the shearing resistance between soil and wall to be les than a ratio (usually 2/3=0.67) o the soil shearing resistance. This ratio is defined in [Parameters/Retaining walls].

The additional seismic forces, due to active earth pressure, are computed according to Eurocode 8 Part 5, Annex E, using the formula of Mononobe-Okabe [ref]. Thus the increased active earth pressure with seismic loading is computed as

active earth pressure $P_A = \frac{\gamma H^2}{2} K_E$

$$K_E = \frac{\cos^2(\varphi - \omega - \theta)}{\cos\omega \cos^2\theta \cos(\delta+\theta+\omega)\left[1+\sqrt{\frac{\sin(\varphi+\delta)\sin(\varphi-\omega-\beta)}{\cos(\theta+\omega+\delta)\cos(\beta-\beta)}}\right]^2}$$

φ angle of internal friction of soil

δ angle of wall friction

$\omega = \arctan\left(\frac{a_h}{1-a_v}\right)$ a_h, a_v horizontal and vertical seismic coefficient

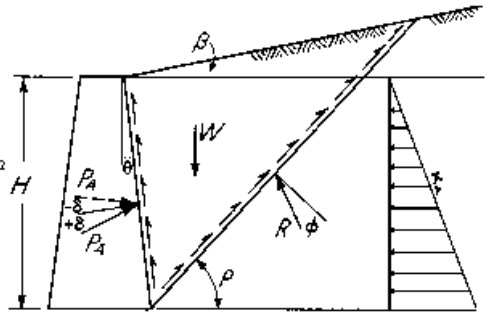

In addition horizontal and vertical forces are acting at the center of gravity of the wall due to the wall mass. These forces are equal to **Fh=kh.W** and **Fv=kv.W**. Where **kh** and **kv** the horizontal and vertical seismic coefficients.

26. References

Eurocode 0	1990:2002	Basis of structural design
Eurocode 1	EN 1991-1-1:2002	Actions on structures – general actions – Densities, self-weight and imposed loads.
	EN 1991-1-2:2002	Actions on structures – general actions – Actions on structures exposed to fire
	EN 1991-1-3:2003	Actions on structures – general actions – Snow loads
	EN 1991-1-4:2005	Actions on structures – general actions – Wind actions
	EN 1991-1-5:2003	Actions on structures – general actions – Thermal actions
	EN 1991-1-6:2005	Actions on structures – general actions – Actions during execution
	EN 1991-1-7:2005	Actions on structures – general actions – Accidental Actions
Eurocode 2	EN 1992-1-1:2004	Design of concrete structures, General rules and rules for buildings
	EN 1992-1-2:2004	Design of concrete structures, General rules -Structural fire design
Eurocode 3	EN 1993-1-1:2005	Design of steel structures
Eurocode 4	EN 1994-1-1:2004	Design of composite steel and concrete structures, General rules and rules for buildings
Eurocode 5	EN 1995-1-1:2003	Design of timber structures – General – Common rules and rules for buildings
	EN 1995-1-2:2003	Design of timber structures – General – Structural fire design
Eurocode 6	EN 1996-1-1:2005	Design of masonry structures, General rules for reinforced and unreinforced masonry structures
	EN 1996-1-2:2005	Design of masonry structures, General rules - Structural fire design
Eurocode 7	EN 1997-1:2004	Geotechnical design – General rules
Eurocode 8	EN 1998-1:2004	Design of structures for earthquake resistance, General rules, seismic actions and rules for buildings
	EN 1998-5:2004	Design of structures for earthquake resistance, Foundations, retaining structures and geotechnical aspects
Eurocode 9	EN 1999-1-1	Design of Aluminium structures, General rules

Eurocode 1 (EC1) ENV 1991 Basis of design and actions on structures

Eurocode 2 (EC2) ENV 1992 Design of concrete structures.

Eurocode 6 (EC6) ENV 1996 Design of masonry structures.

Eurocode 7 (EC7) ENV 1997 Geotechnical design.

Eurocode 8 (EC8) "*Structures in seismic regions, Part 5, Foundations, Retaining Structures, Geotechnical Aspects*" Draft, January 1991.

- Bares R. and Massonet Ch., "*Analysis of beam grids and orthotropic plates*", Frederic Ungar Publishing Co. Inc., New York, 1968,
- Marcus H., "*Die vereinfachte Barechnung biegsamer Platten*", 2nd ed., Springer-Verlag, Berlin, 1929.
- Czerny, F., "*Tafeln für vierseitig gelagerte Rechteckplatten*", Beton Kalender, Vol1, W. Ernst und Sohn, Berlin, 1965, pp 233-261.
- Mononobe N, "Earthquake proof construction of masonry dams", Proceedings, World Engineering Conference, Volume 9, p275, 1929.
- Okabe S "General Theory of Earth Pressure", Journal of Japanese Society of Civil Engineers, volume 12, No 1, 1926.
- Gipson, R. F. "Principles of Composite Material Mechanics", McGraw-Hill, New York, 1994

Annex 1

27. BETONexpress Command Line

BETONexpress can also run as a post processor of various Finite Element Programs (ANSYS, SAP2000,) to perform the concrete element design. The communication of BETONexpress with other programs can be done with a command file in simple text format. Each line of this Command line file describes an object that is going to be created in BETONexpress. Commands and data can be read in BETONexpress and the design objects are automatically created. The format of the command text file is given below.

27.1 How to import the command file

Click at menu File/ Read Command Line File

Browse and [Open] the file with the command lines (.TXT)

Enter the name of the new project file as .BetonExpress data.

… and the Design objects are created from the commands and the data of the text file.

27.2 Example of command text file

```
MATER BI=4, SI=5, gG=1.35, gQ=1.50

PLATE-1 NM=Slab-1, H=0.20, Cb=15, D=10,   Mb=12.10
PLATE-1 NM=Slab-2, H=0.25, Cb=15, D=10.1, Mb=12.30

PLATE-2 NM=Slab-7, TP=0011, H=0.20, Cb=15, D=10, Lx=3.60, Ly=4.00, G=0.80, Q=2.00
PLATE-2 NM=Slab-8, TP=1010, H=0.20, Cb=15, D=10, Lx=3.90, Ly=4.50, G=0.80, Q=2.00

BEAM-1  NM=BeamA-1, BW=0.20,  H=0.50, Cb=25, D=14,   Mb=48.65, Vs=56.80, Na=12.56
BEAM-1  NM=BeamA-2, BW=0.20,  H=0.60, Cb=25, D=14.1, Mb=58.65, Vs=66.80, Na=22.56

BEAM-2  NM=BeamT-5, TP=1, BW=0.20, Bf=1.25, H=0.50, Hf=0.07, Cb=25, D=14,   Mb=48.65, Vs=56.80, Na=12.56,  L=6.47,  SP=0
BEAM-2  NM=BeamT-6, TP=2, BW=0.20, Bf=1.25, H=0.60, Hf=0.07, Cb=25, D=14.1, Mb=58.65, Vs=66.80, Na=22.56,  L=7.47,  SP=1

MATER BI=5, SI=5, gG=1.35, gQ=1.50

COLUMN-1 NM=Column-1, TP=0, Bx=0.35, By=0.35, Cb=25, D=20,    Mx=48.65, My=56.70, Na=-812.16, H=3.50
COLUMN-1 NM=Column-2, TP=1, Bx=0.36, By=0.36, Cb=26, D=22.1,  Mx=48.75, My=56.80, Na=-812.26, H=3.60

FOOT-1 NM=Foot-1, Lx=1.50, Ly=1.40, Cx=0.30, Cy=0.40,  H=0.70, H1=0.40, Cb=30, D=12,    Ng=148.61, Nq=156.71, Qu=0.21, Ws=1.91, Hs=
FOOT-1 NM=Foot21, Lx=1.60, Ly=1.50, Cx=0.40, Cy=0.50,  H=0.70, H1=0.40, Cb=30, D=12.1,  Ng=128.62, Nq=186.72, Qu=0.22, Ws=1.92, Hs=
```

27.2.1 Command Line explanations

Every part of a command must separated with comma (,)

Code words (first word and words with =) must be exactly the same

Capital and small letters are the same

MATER	**Materials and partial safety factors**
BS=C16/20	Concrete class
SS=S500	Steel class
gG=1.35	**γ_G Partial factor for permanent loads**
gQ=1.50	**γ_Q Partial factor for variable loads**

If Material Command is omitted, then the default values that are set in the program the moment you read the command file are taken.

Many material cards may be included. Each one affects the set of following commands.

PLATE-1 **Cross section of Plate**

NM=SLAB-1 Name of slab object (any name up to 16 characters)
*** NOTE object names are unique and must not repeated *****
H=0.20 Slab thickness in [m].
Cb=15 Concrete cover in [mm]
D=10 Rebar diameter (optimum). The program uses a optimum diameter around this.
If you use D=10.1 then only10 mm rebar diameter will be used
Mb=12.10 Bending moment in [kNm/m] for the slab cross section.

PLATE-2 **Two way slab**

NM=SLAB-1 Name of slab object (up to 16 characters)
H=0.20 Slab thickness in [m].
Cb=15 Concrete cover in [mm]
D=10 Rebar diameter (optimum). The program uses an optimum diameter around this.
If you use D=10.1 then only 10 mm rebar diameter will be used
TP=0011 Support conditions.
0=support
1=fixed
Numbers in order Left, Bottom, Right, Top supports
Lx=3.60 Span x in [m]
Ly=4.00 Span y in [m]
g=0.80 Uniformly distributed permanent load in addition to self weight in [kn/m^2]
q=2.00 Uniformly distributed variable load in [kn/m^2]

BEAM-1 **Beam section of orthogonal cross section**

NM=BEAMA-1 Name of slab object (any name up to 16 characters).
Cb=25 Concrete cover in [mm]
D=14 Rebar diameter (optimum). The program uses a optimum diameter around this.
If you use D=14.1 then only 14 mm rebar diameter will be used
BW=0.20 Beam width in [m]
H=0.50 Beam height in [m]
Mb=48.65 Beam bending moment in [kNm]
Vs=56.80 Beam shear force in [kN]
Na=12.56 Beam axial force in [kN]

BEAM-2 **Beam section of T cross section**

NM=BEAMT-5 Name of slab object (up to 16 characters).
Cb=25 Concrete cover in [mm]
D=14 Rebar diameter (optimum). The program uses a optimum diameter around this.
If you use D=14.1 then only14 mm rebar diameter will be used
TP=1 Beam type
0=orthogonal cross section
1=T beam
2=L beam

BW=0.20 Beam width in [m]
Bf=1.25 Effective beam width in [m]

H=0.50 Beam height in [m]
Hf=0.07 Beam flange thickness in [m]
Mb=48.65 Beam bending moment in [kNm]
Vs=56.80 Beam shear force in [kN]
Na=12.56 Beam axial force in [kN]
L=6.47 Beam span length
SP=1 Span type
0 simply supported
1 simply supported-fixed
2 fixed-fixed

COLUMN-1 **Short column cross section**
NM=Column-1 Name of slab object (up to 16 characters).
Cb=25 Concrete cover in [mm]
D=20 Rebar diameter (optimum). The program uses a optimum diameter around this.
If you use D=20.1 then 20 mm rebar diameter will be used only
TP=0 Section type
0, 1 for square section
2 for round cross section (in this case Bx=By=D)

Bx=0.35 x column side in [m]
By=0.35 y column side in [m]
Mx=48.65 Bending moment Mxx in [kNm]
My=56.70 Bending moment Myy in [kNm]
Na=-812.16 Axial load in [kN]
H=3.50 Column height in [m]

FOOT-1 **Short column cross section**
NM=Foot-1 Name of slab object (up to 16 characters).
Cb=25 Concrete cover in [mm]
D=12 Rebar diameter (optimum). The program uses a optimum diameter around this.
If you use D=12.1 then 12 mm rebar diameter will be used only
Lx=1.50 Footing x dimension in [m]
Ly=1.40 Footing y dimension in [m]
Cx=0.30 Column x dimension in [m]
Cy=0.40 Column y dimension in [m]
H=0.70 Footing total height in [m]
H1=0.40 Footing base height in [m]
Ng=148.61 Permanent vertical load on top in [kN]
Nq=156.71 Variable vertical load on top in [kN]
Qu=0.21 Soil bearing pressure in [N/mm^2]
Ws=1.91 Soil unit weight in [kN/m^3]
Hs=2.1 Foundation depth in [m]